

DATA: 24/06/2020

60120040000: NMM 2/A/A

DATI POMPA E MOTORE


n (rpm):	2900	Un (V):	230
Max pressione di esercizio (bar):	10	fn (Hz):	50
H max (m):	33.50	Poli:	2
H min (m):	24.00	In (A):	5.7
Q min (mc/h):	1.00	PF:	0.96
Q max (mc/h):	6.00	C (mF):	20
Pn (kW):	0.75	Vc (V):	450
Pn (HP):	1.00	Min temperatura del liquido (°C):	-10.00 °C
Diametro girante (mm):	158.00	Max temperatura del liquido (°C):	90
Fasi motore:	1~	Peso (kg):	15.150

MATERIALI

Corpo pompa:	Ghisa GJL 200 EN 1561	Albero:	Acciaio al cromo 1.4104 EN 10088
Raccordo:	Ghisa GJL 200 EN 1561		(AISI 430F)
Girante:	Ottone P-Cu Zn 40 Pb 2 UNI 5705	Tenuta meccanica:	Carbone-Ceramica-NBR

DATA: 24/06/2020

60120040000: NMM 2/A/A

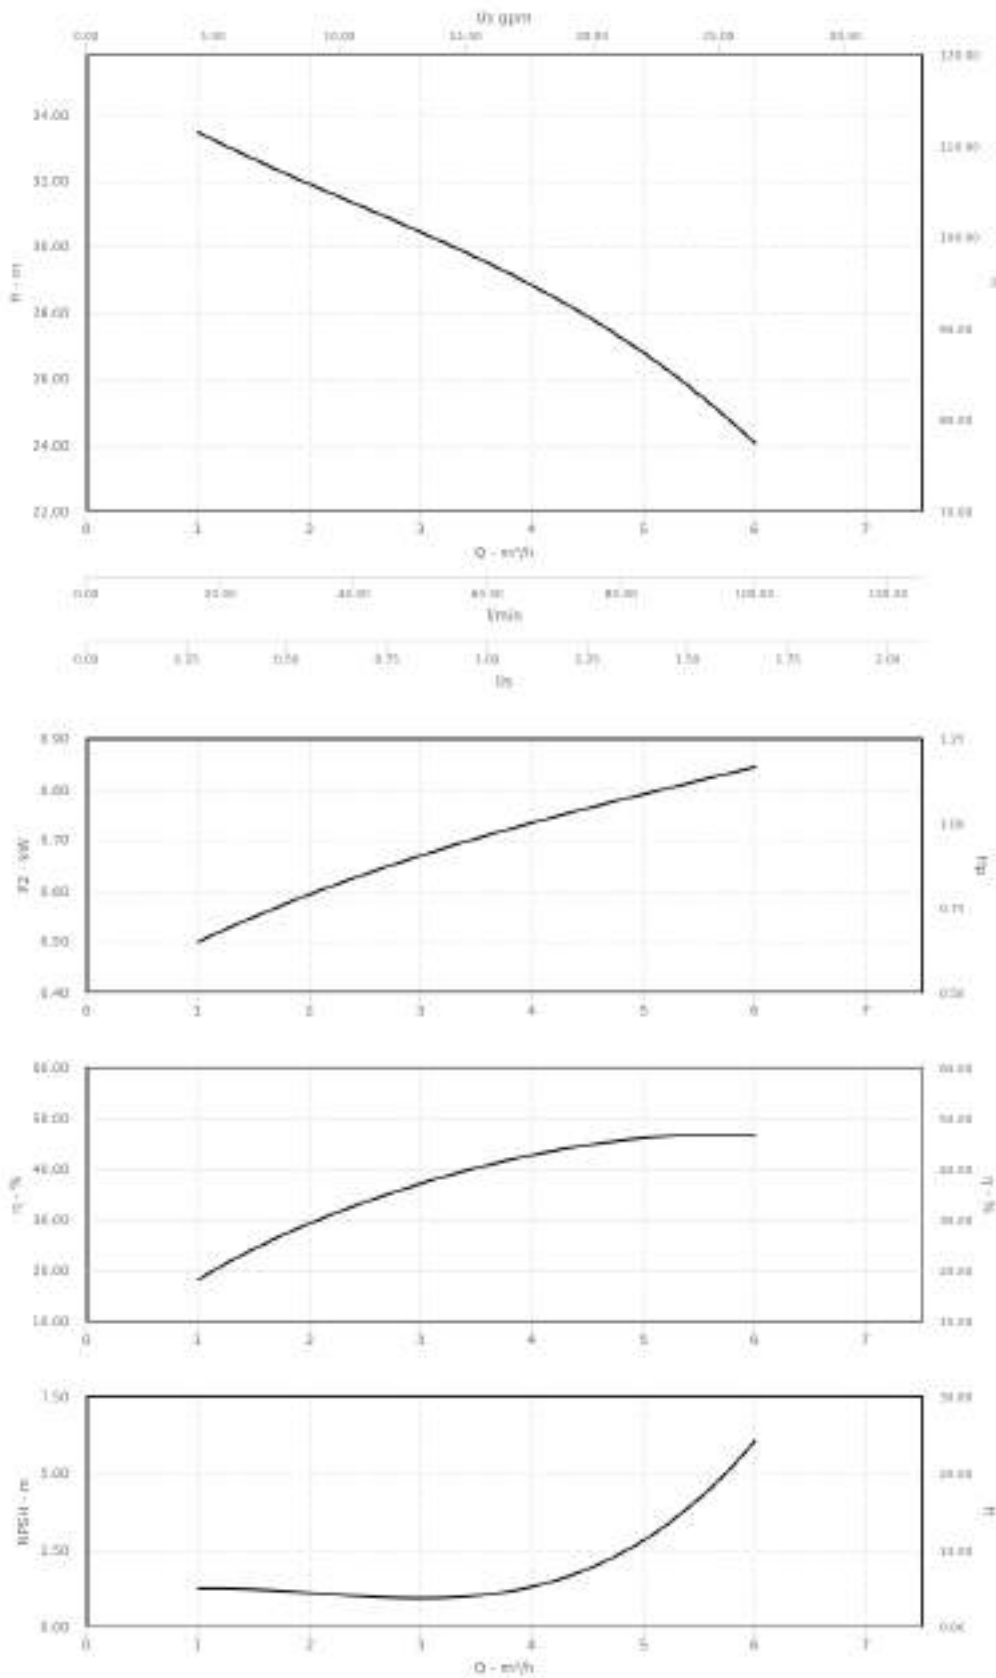

DATA: 24/06/2020

60120040000: NMM 2/A/A

DIMENSIONI (MM)

dn1: G 1
dn2: G 1
a: 45.00 mm
m1: 40.00 mm
m2: 32.00 mm
n1: 190.00 mm
n2: 160.00 mm
n3: 17.00 mm
b: 35.00 mm
fM: 305.00 mm
l1: 87.00 mm
l2: 90.00 mm
g1: 10.00 mm
h1: 95.00 mm
h2: 150.00 mm
HD: 207.00 mm
w: 203.00 mm

