

Ficha Técnica: 24/06/2020

60100400000: NMM 6/A

FICHA DE BOMBA Y MOTOR


n (rpm):	2900	Un (V):	230
Max presión de trabajo (bar):	10	f_q (Hz):	50
H max (m):	35.50	Polos:	2
H min (m):	19.00	I_n (A):	7.4
Q min (mc/h):	1.89	cosφ:	0.97
Q max (mc/h):	8.40	C (mF):	30
P_n (kW):	1.10	V_c (V):	450
P_n (HP):	1.50	Min temperatura de liquido (°C):	-10.00 °C
Diámetro de rodetes (mm):	161.50	Max temperatura de liquido (°C):	90
Fases de motor:	1~	Peso (kg):	19.260

MATERIALES

Cuerpo bomba:	Cast iron GJL 200 EN 1561	Eje:	Chrome steel 1.4104 EN 10088
Acoplamiento motor bomba:	Cast iron GJL 200 EN 1561		(AISI 430F)
Rodete:	Brass P-Cu Zn 40 Pb 2 UNI 5705	Sello mecánico:	Carbon-Ceramic-NBR

Ficha Técnica: 24/06/2020

60100400000: NMM 6/A

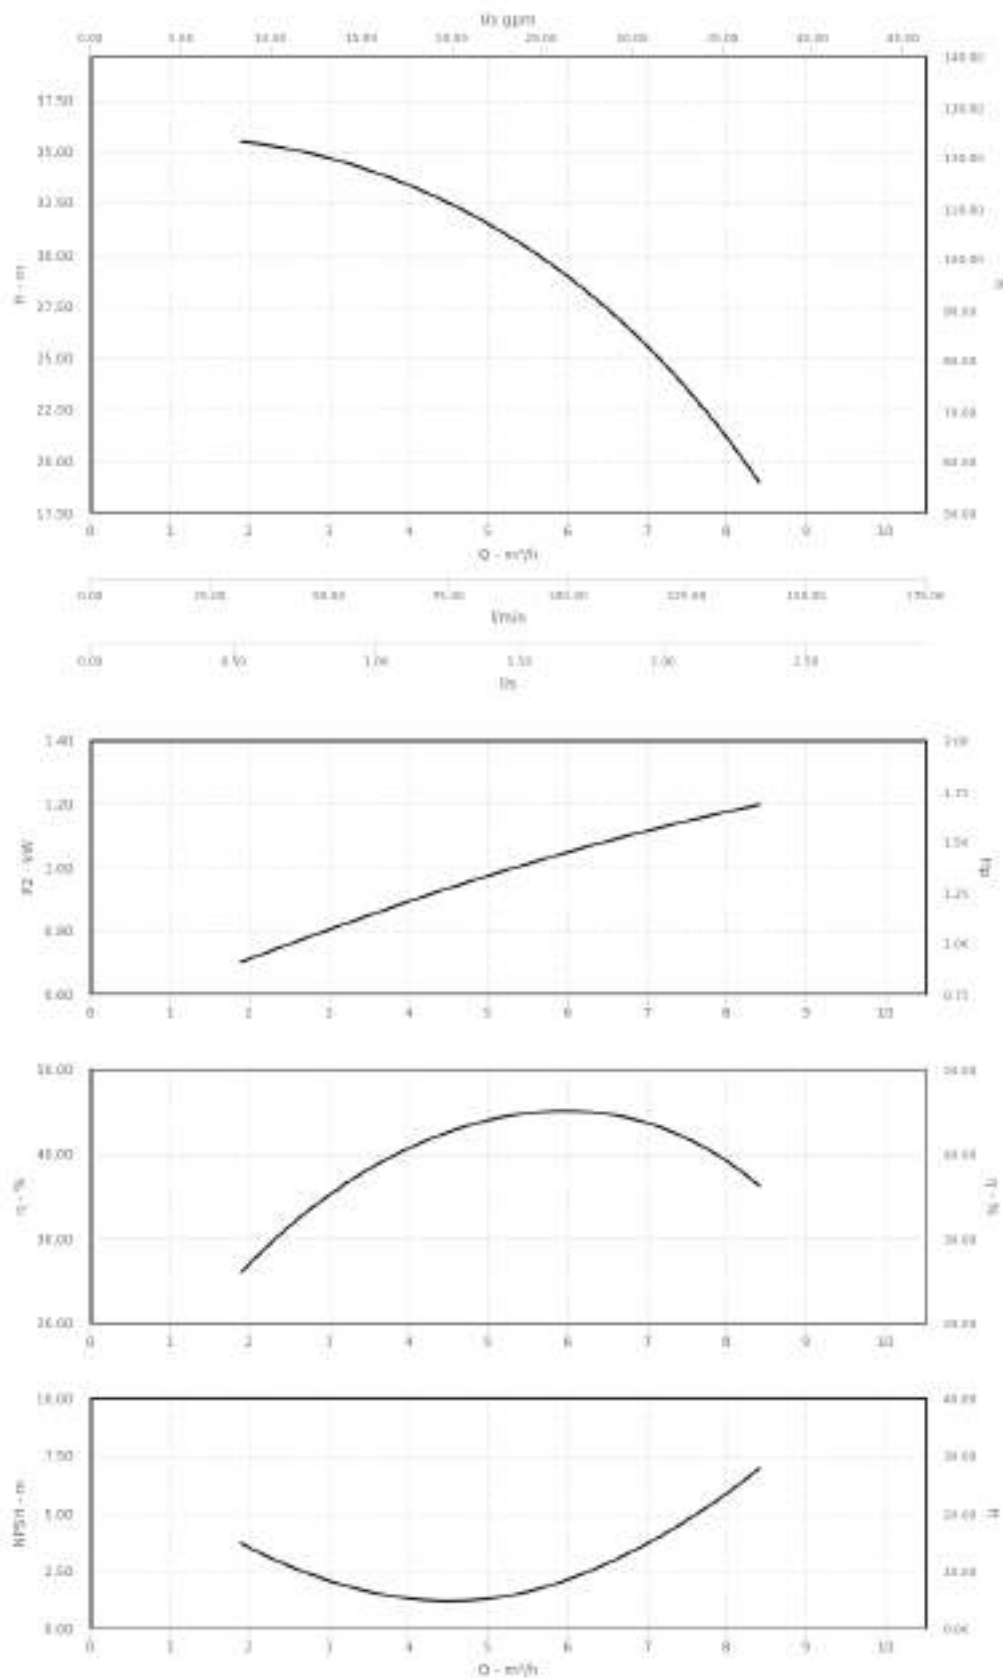

Ficha Técnica: 24/06/2020

60100400000: NMM 6/A

DIMENSIONES (MM)

dn1: G 1 1/4
dn2: G 1
a: 53.00 mm
m1: 37.50 mm
m2: 27.50 mm
n1: 190.00 mm
n2: 150.00 mm
n3: 17.00 mm
b: 38.00 mm
fM: 349.00 mm
s: 9.5
l1: 102.00 mm
l2: 102.00 mm
g1: 10.00 mm
h1: 100.00 mm
h2: 150.00 mm
HD: 213.00 mm
w: 225.00 mm

