

Ficha Técnica: 24/06/2020

60000322000: NM 25/160B/A

FICHA DE BOMBA Y MOTOR


n (rpm):	2900	Fases de motor:	3~
Max presión de trabajo (bar):	10	Un (V):	230/400
H max (m):	31.00	f_q (Hz):	50
H min (m):	23.00	Polos:	2
Q min (mc/h):	3.00	In (A):	4.6 / 2.7
Q max (mc/h):	9.60	cosφ:	0.80
P_n (kW):	1.10	Min temperatura de liquido (°C):	-10.00 °C
P_n (HP):	1.50	Peso (kg):	21.500
Diámetro de rodetes (mm):	150.00		

MATERIALES

Cuerpo bomba:	Cast iron GJL 200 EN 1561	Eje:	Cr-Ni steel 1.4305 EN 10088 (AISI 303)
Acoplamiento motor bomba:	Cast iron GJL 200 EN 1561	Sello mecánico:	Carbon-Ceramic-NBR
Rodete:	Brass P-Cu Zn 40 Pb 2 UNI 5705		

Ficha Técnica: 24/06/2020

60000322000: NM 25/160B/A

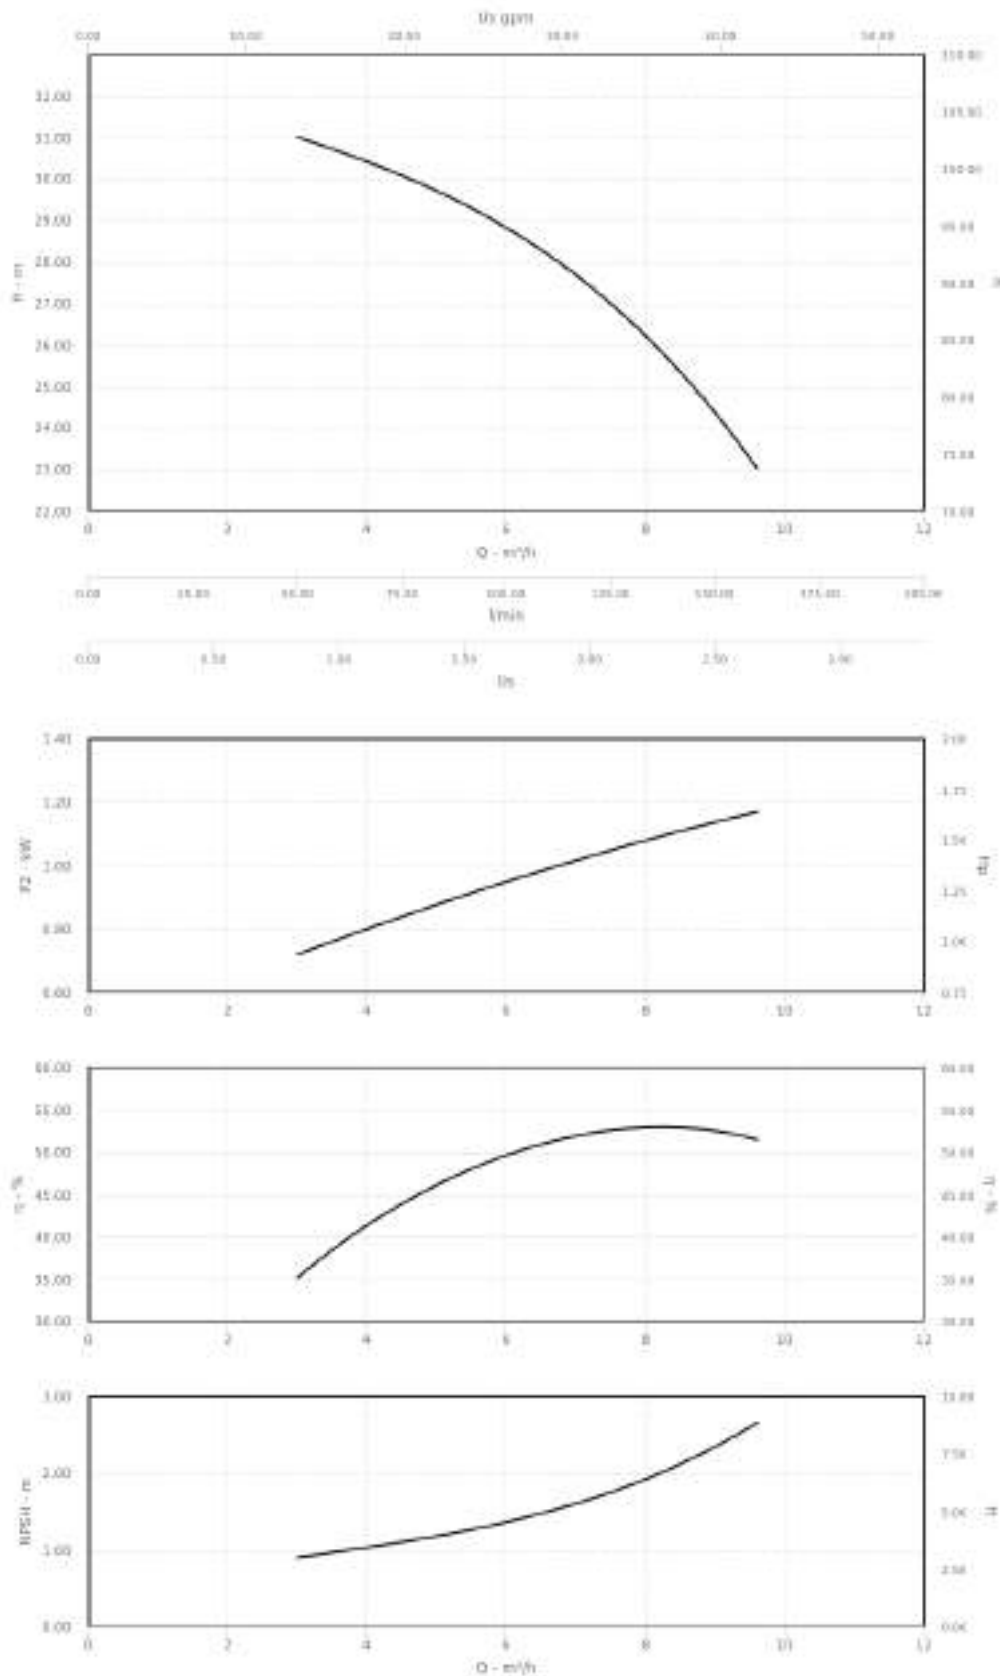

Ficha Técnica: 24/06/2020

60000322000: NM 25/160B/A

DIMENSIONES (MM)

dn1: G 1 ¼
dn2: G 1
a: 56.00 mm
m1: 37.50 mm
m2: 27.50 mm
n1: 190.00 mm
n2: 150.00 mm
n3: 30.00 mm
b: 38.00 mm
fM: 380.00 mm
l1: 102.00 mm
l2: 102.00 mm
g1: 10.00 mm
h1: 100.00 mm
h2: 160.00 mm
HD: 228.00 mm
w: 246.00 mm

