

Ficha Técnica: 24/06/2020

60000381400: NM 25/20S/C

FICHA DE BOMBA Y MOTOR


n (rpm):	2900	Fases de motor:	3~
Max presión de trabajo (bar):	10	Un (V):	400/690
H max (m):	57.80	f_q (Hz):	50
H min (m):	45.60	Polos:	2
Q min (mc/h):	3.00	In (A):	9.6 / 5.5
Q max (mc/h):	18.00	cosφ:	0.80
P_n (kW):	4.00	Min temperatura de liquido (°C):	-10.00 °C
P_n (HP):	5.50	Peso (kg):	40.630
Diámetro de rodetes (mm):	200.00		

MATERIALES

Cuerpo bomba:	Cast iron GJL 200 EN 1561	Eje:	Chrome steel 1.4104 EN 10088
Acoplamiento motor bomba:	Cast iron GJL 200 EN 1561		(AISI 430F)
Rodete:	Brass P-Cu Zn 40 Pb 2 UNI 5705	Sello mecánico:	Carbon-Ceramic-NBR

Ficha Técnica: 24/06/2020

60000381400: NM 25/20S/C

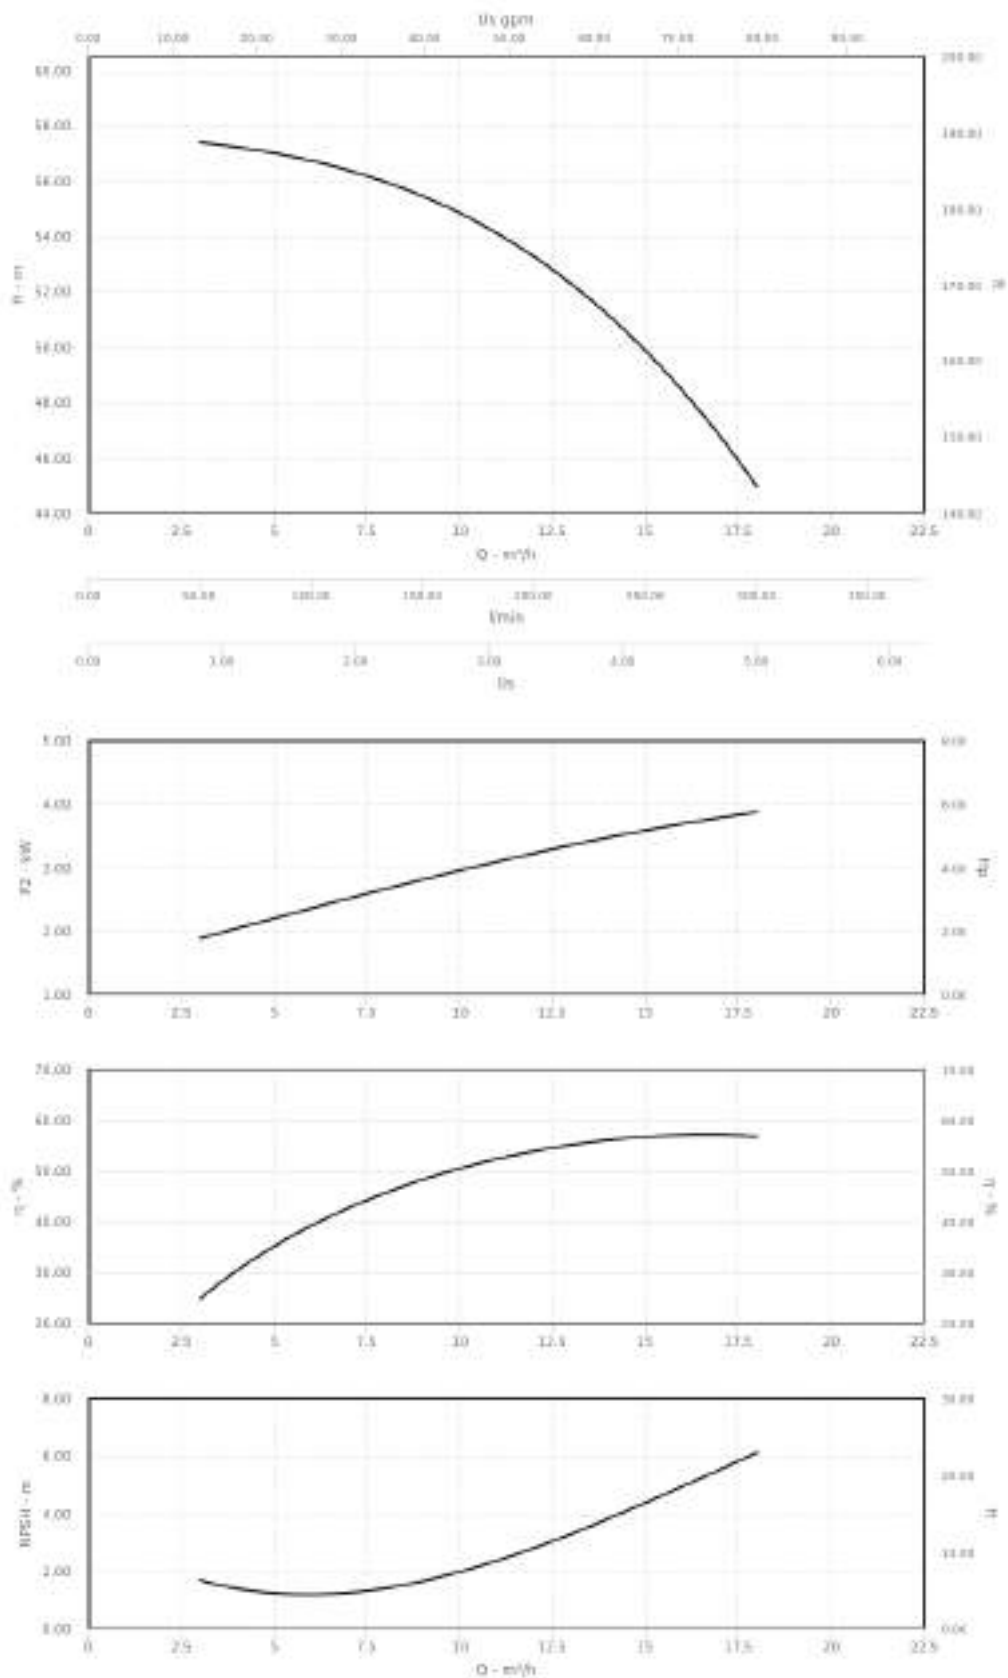

Ficha Técnica: 24/06/2020

60000381400: NM 25/20S/C

DIMENSIONES (MM)

dn1: G 1 ½

dn2: G 1

a: 63.00 mm

m1: 45.00 mm

m2: 32.50 mm

n1: 245.00 mm

n2: 200.00 mm

n3: 42.00 mm

b: 45.00 mm

fM: 460.00 mm

l1: 125.00 mm

l2: 125.00 mm

g1: 11.00 mm

h1: 125.00 mm

h2: 180.00 mm

HD: 263.00 mm

w: 295.00 mm

