

DATA: 26/10/2022

60200123000: NMD 25/190A/B

DATI POMPA E MOTORE




n (rpm):	2900	Un (V):	400/690
N. di giranti:	2	fn (Hz):	50
H max (m):	98.00	Poli:	2
H min (m):	70.00	In (A):	9.6 / 5.5
Q min (mc/h):	2.40	PF:	0.85
Q max (mc/h):	9.60	Classe di isolamento:	F
Pn (kW):	4.00	Servizio:	S1
Pn (HP):	5.50	Min temperatura del liquido (°C):	-10.00 °C
Diametro girante (mm):	190.00	IE:	IE3-88.1
Tipo motore:	IM	Peso (kg):	52.400
Fasi motore:	3~	Protezione:	IP 54

MATERIALI

Corpo pompa:	Ghisa GJL 200 EN 1561	Albero:	Acciaio inossidabile al Cr 1.4104
Raccordo:	Ghisa GJL 200 EN 1561		EN 10088 (AISI 430F)
Girante:	Ottone P-Cu Zn 40 Pb 2 UNI 5705	Tenuta meccanica:	Carbone-Ceramica-NBR

DATA: 26/10/2022

60200123000: NMD 25/190A/B

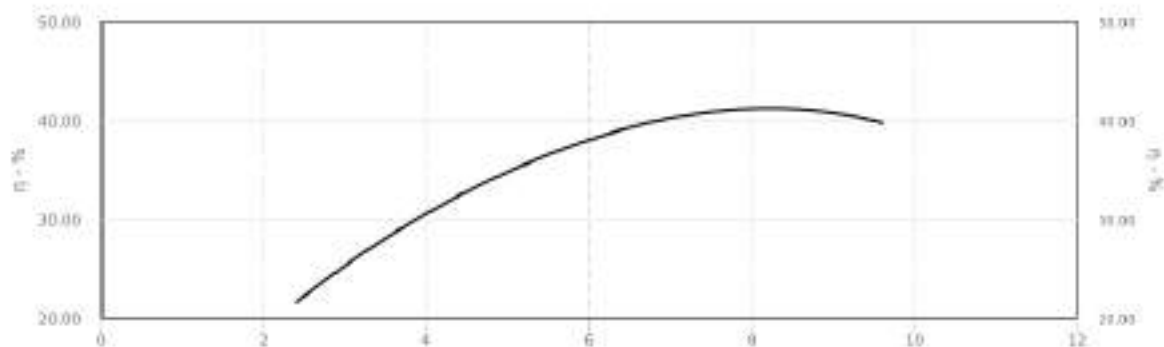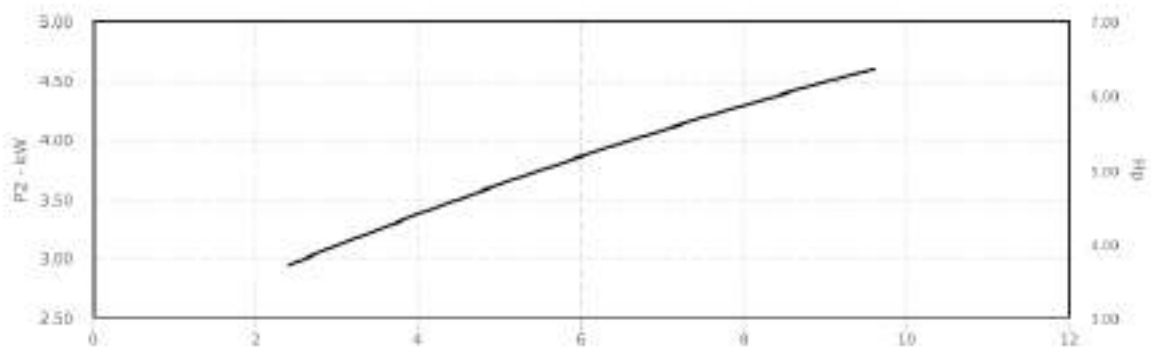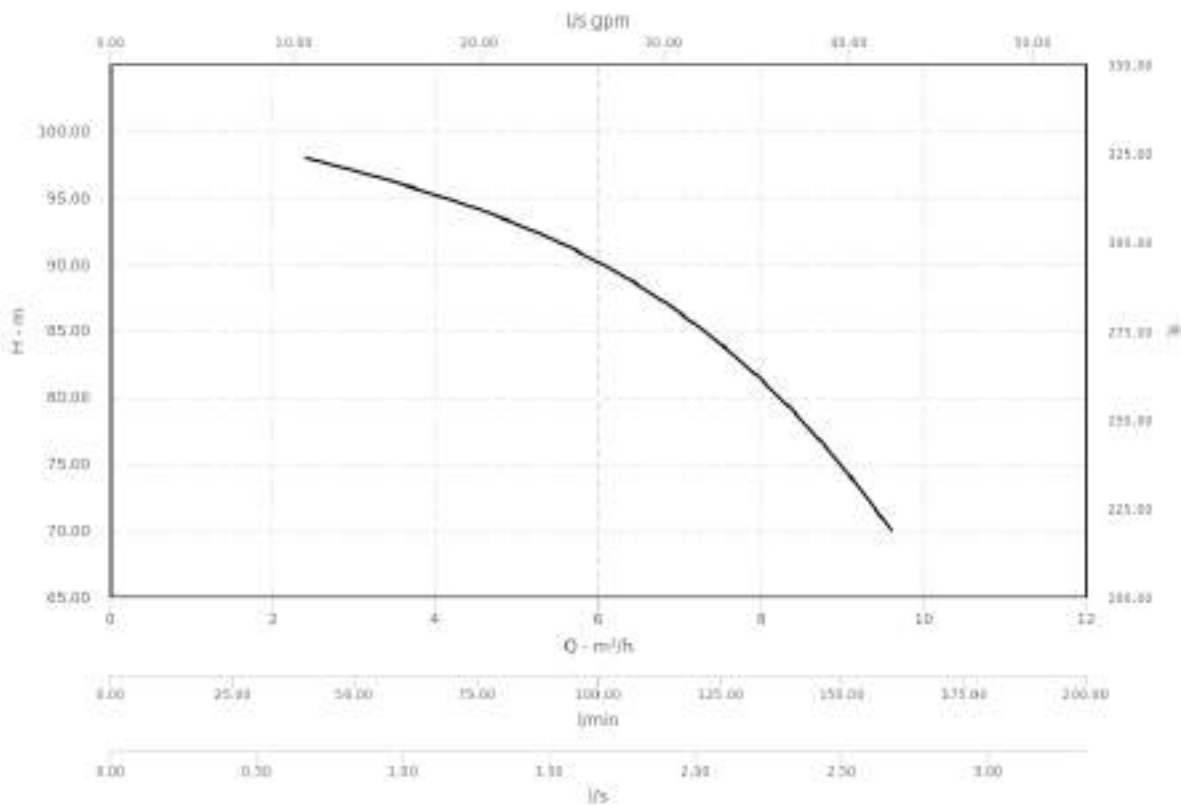

DATA: 26/10/2022

60200123000: NMD 25/190A/B

DIMENSIONI (MM)

dn1: G 1 1/2"
dn2: G 1"
a: 97.00 mm
m1: 100.00 mm
m2: 70.00 mm
n1: 250.00 mm
n2: 190.00 mm
n3: 34.00 mm
b: 50.00 mm
fM: 505.00 mm
l1: 133.00 mm
l2: 133.00 mm
g1: 12.00 mm
h1: 140.00 mm
h2: 180.00 mm
HD: 280.00 mm
w: 303.50 mm

