

DATA: 30/08/2021

60402330000: NM 32L/16B

DATI POMPA E MOTORE


n (rpm):	2900	Un (V):	230/400
N. di giranti:	1	fn (Hz):	50
Max pressione di esercizio (bar):	16	Poli:	2
H max (m):	30.40	In (A):	11.5 / 6.6
H min (m):	17.90	PF:	0.83
Q min (mc/h):	9.60	Classe di isolamento:	F
Q max (mc/h):	29.00	Servizio:	S1
Pn (kW):	3.00	Min temperatura del liquido (°C):	-10.00 °C
Pn (HP):	4.00	IE:	IE3-87.1
Diametro girante (mm):	151.00	Peso (kg):	43.400
Tipo motore:	IM	Protezione:	IP 54
Fasi motore:	3~		

MATERIALI

Corpo pompa:	Ghisa GJL 200 EN 1561	Albero:	Acciaio inossidabile al Cr 1.4104
Raccordo:	Ghisa GJL 200 EN 1561		EN 10088 (AISI 430F)
Girante:	Ghisa GJL 200 EN 1561	Tenuta meccanica:	Carbone-Ceramica-NBR

DATA: 30/08/2021

60402330000: NM 32L/16B

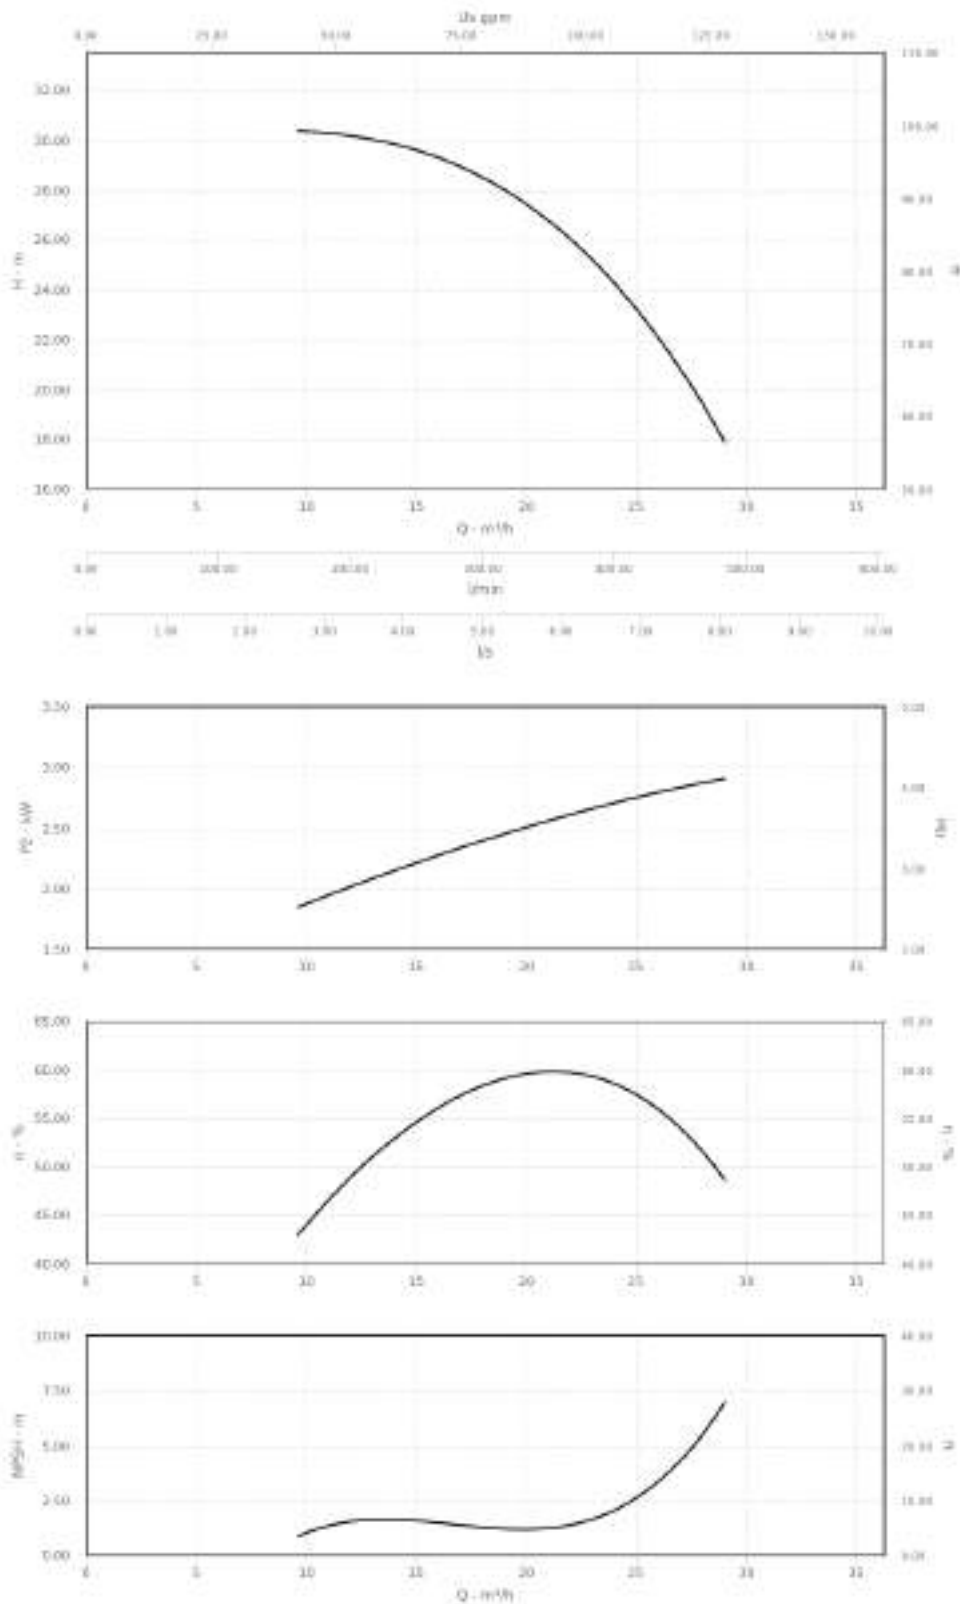

DATA: 30/08/2021

60402330000: NM 32L/16B

DIMENSIONI (MM)

dn1: 50
dn2: 32
a: 80.00 mm
m1: 100.00 mm
m2: 70.00 mm
n1: 240.00 mm
n2: 190.00 mm
n3: 45.00 mm
b: 50.00 mm
fM: 475.00 mm
l1: 121.00 mm
l2: 121.00 mm
g1: 10.00 mm
h1: 132.00 mm
h2: 160.00 mm
HD: 270.00 mm
w: 295.00 mm

