

DATA: 30/08/2021

60402400000: NM 32L/20B

DATI POMPA E MOTORE


n (rpm):	2900	Un (V):	400/690
N. di giranti:	1	fn (Hz):	50
Max pressione di esercizio (bar):	16	Poli:	2
H max (m):	51.70	In (A):	10.8 / 6.2
H min (m):	33.50	PF:	0.84
Q min (mc/h):	9.60	Classe di isolamento:	F
Q max (mc/h):	29.00	Servizio:	S1
Pn (kW):	5.50	Min temperatura del liquido (°C):	-10.00 °C
Pn (HP):	7.50	IE:	IE3-89.2
Diametro girante (mm):	195.00	Peso (kg):	62.000
Tipo motore:	IM	Protezione:	IP 54
Fasi motore:	3~		

MATERIALI

Corpo pompa:	Ghisa GJL 200 EN 1561	Albero:	Acciaio inossidabile al Cr 1.4104
Raccordo:	Ghisa GJL 200 EN 1561		EN 10088 (AISI 430F)
Girante:	Ottone P-Cu Zn 40 Pb 2 UNI 5705	Tenuta meccanica:	Carbone-Ceramica-NBR

DATA: 30/08/2021

60402400000: NM 32L/20B

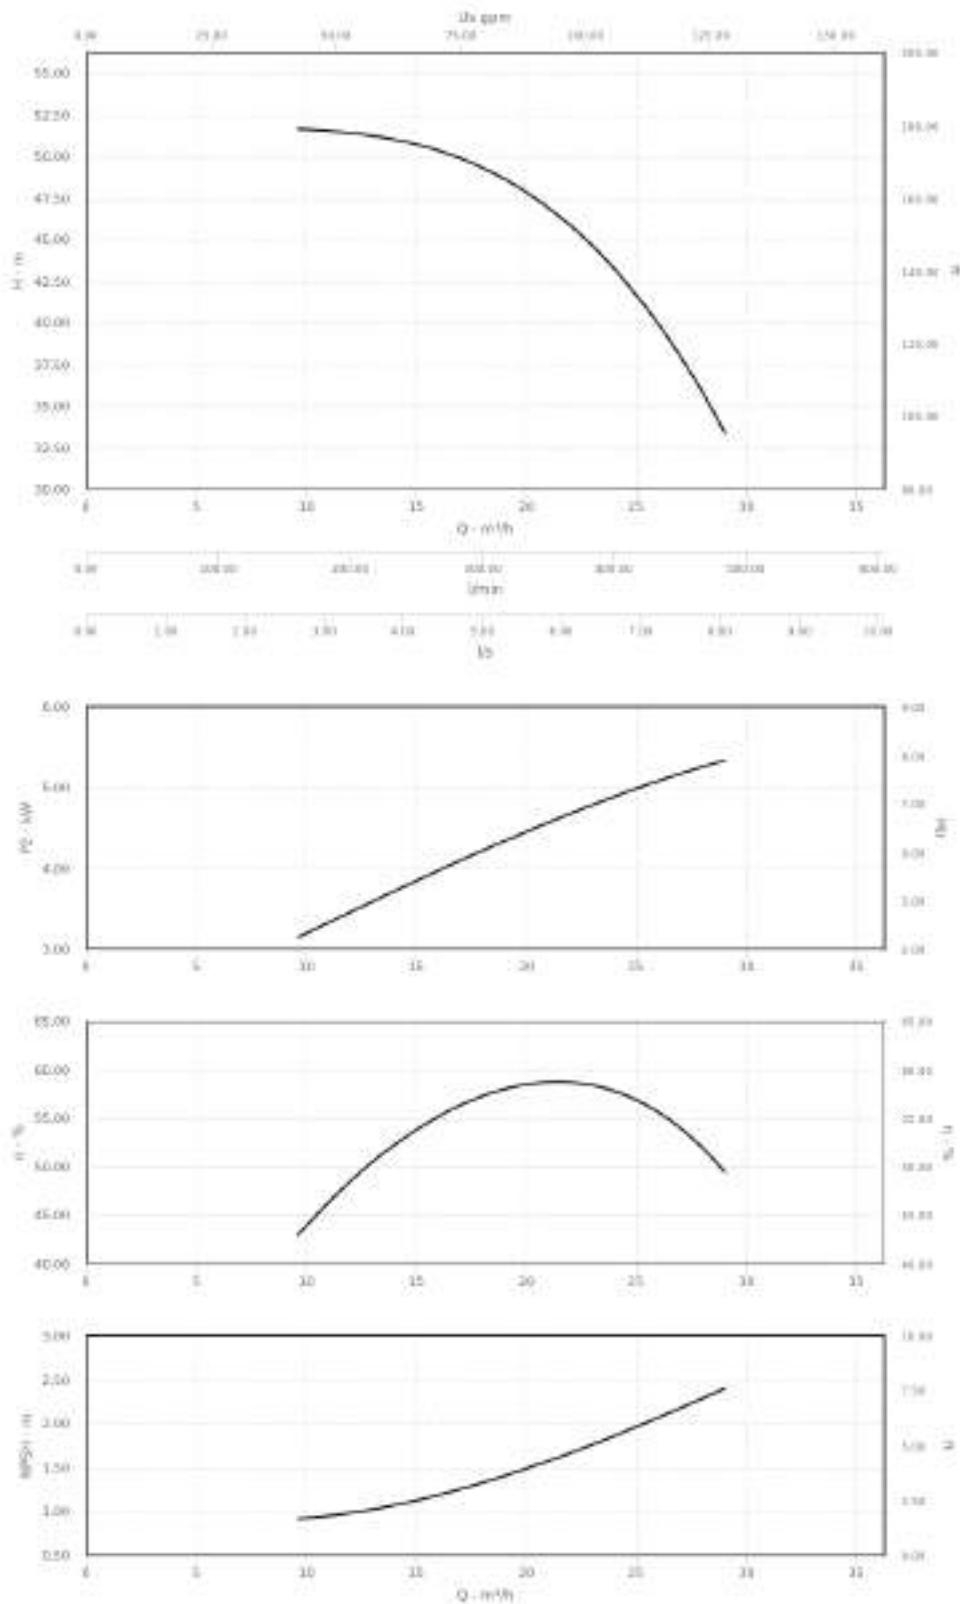

DATA: 30/08/2021

60402400000: NM 32L/20B

DIMENSIONI (MM)

dn1: 50
dn2: 32
a: 80.00 mm
m1: 100.00 mm
m2: 70.00 mm
n1: 240.00 mm
n2: 190.00 mm
n3: 49.00 mm
b: 50.00 mm
fM: 508.00 mm
l1: 142.00 mm
l2: 142.00 mm
g1: 12.00 mm
h1: 160.00 mm
h2: 180.00 mm
HD: 320.00 mm
w: 279.00 mm

