

Ficha Técnica: 25/06/2020

60400462000: NM 40/16B/B

FICHA DE BOMBA Y MOTOR


n (rpm):	2900	Fases de motor:	3~
Max presión de trabajo (bar):	10	Un (V):	230/400
H max (m):	29.00	f_q (Hz):	50
H min (m):	14.00	Polos:	2
Q min (mc/h):	15.00	I_n (A):	11.5 / 6.6
Q max (mc/h):	42.00	cosφ:	0.83
P_n (kW):	3.00	Min temperatura de líquido (°C):	-10.00 °C
P_n (HP):	4.00	Peso (kg):	46.100
Diámetro de rodetes (mm):	151.00		

MATERIALES

Cuerpo bomba:	Cast iron GJL 200 EN 1561	Eje:	Cr-Ni steel 1.4305 EN 10088 (AISI 303)
Acoplamiento motor bomba:	Cast iron GJL 200 EN 1561	Sello mecánico:	Carbon-Ceramic-NBR
Rodete:	Cast iron GJL 200 EN 1561	Contrabridas:	Steel S235JR 1.0038 EN 10025-2

Ficha Técnica: 25/06/2020

60400462000: NM 40/16B/B

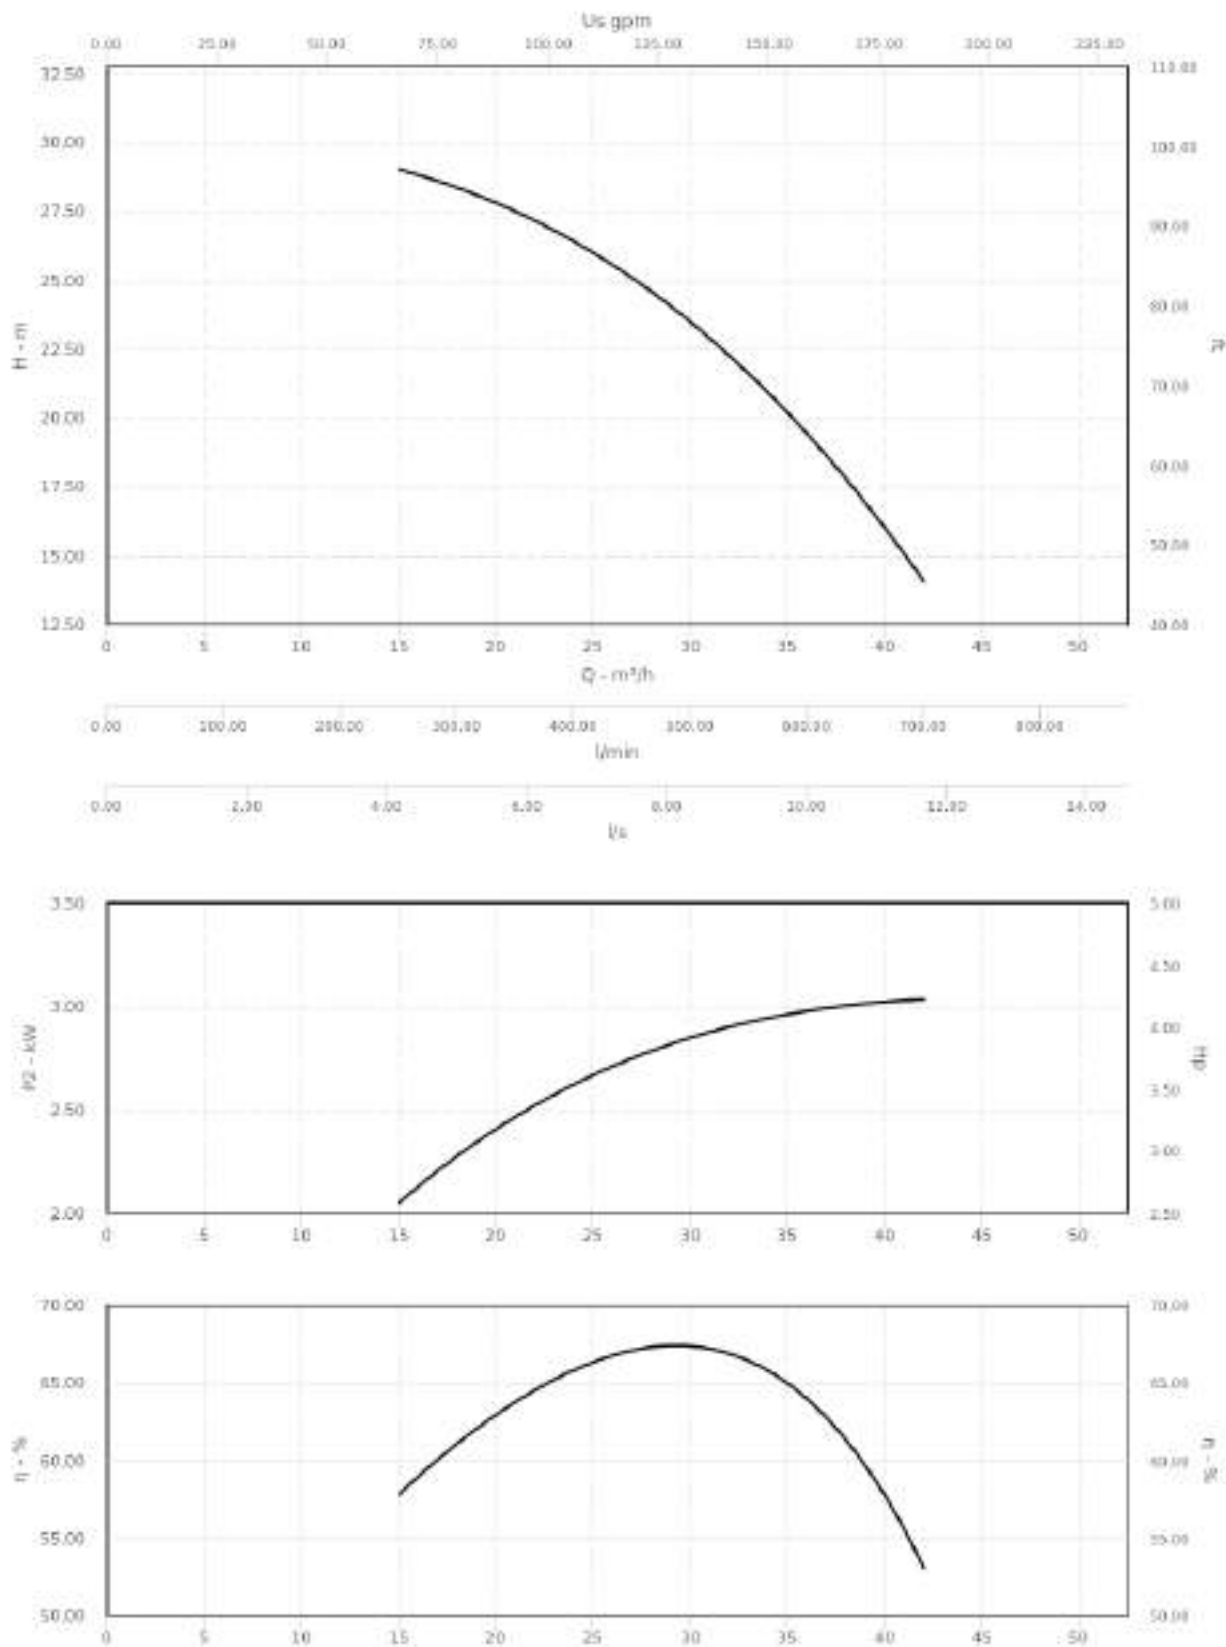

Ficha Técnica: 25/06/2020

60400462000: NM 40/16B/B

DIMENSIONES (MM)

dn1: 65
dn2: 40
a: 80.00 mm
m1: 100.00 mm
m2: 70.00 mm
n1: 240.00 mm
n2: 190.00 mm
n3: 46.00 mm
b: 50.00 mm
l1: 119.00 mm
l2: 119.00 mm
g1: 10.00 mm
h1: 132.00 mm
h2: 160.00 mm
w: 295.00 mm
fM: 475.00 mm

