

Ficha Técnica: 25/06/2020

60400682000: NM 40/20A/A

FICHA DE BOMBA Y MOTOR


n (rpm):	2900	Fases de motor:	3~
Max presión de trabajo (bar):	10	Un (V):	400/690
H max (m):	57.50	f_q (Hz):	50
H min (m):	35.00	Polos:	2
Q min (mc/h):	15.00	In (A):	14.3 / 8.3
Q max (mc/h):	42.00	cosφ:	0.86
P_n (kW):	7.50	Min temperatura de liquido (°C):	-10.00 °C
P_n (HP):	10.00	Peso (kg):	70.800
Diámetro de rodetes (mm):	204.00		

MATERIALES

Cuerpo bomba:	Cast iron GJL 200 EN 1561	Eje:	Chrome steel 1.4104 EN 10088 (AISI 430F)
Acoplamiento motor bomba:	Cast iron GJL 200 EN 1561	Sello mecánico:	Carbon-Ceramic-NBR
Rodete:	Brass P-Cu Zn 40 Pb 2 UNI 5705	Contrabridas:	Steel S235JR 1.0038 EN 10025-2

Ficha Técnica: 25/06/2020

60400682000: NM 40/20A/A

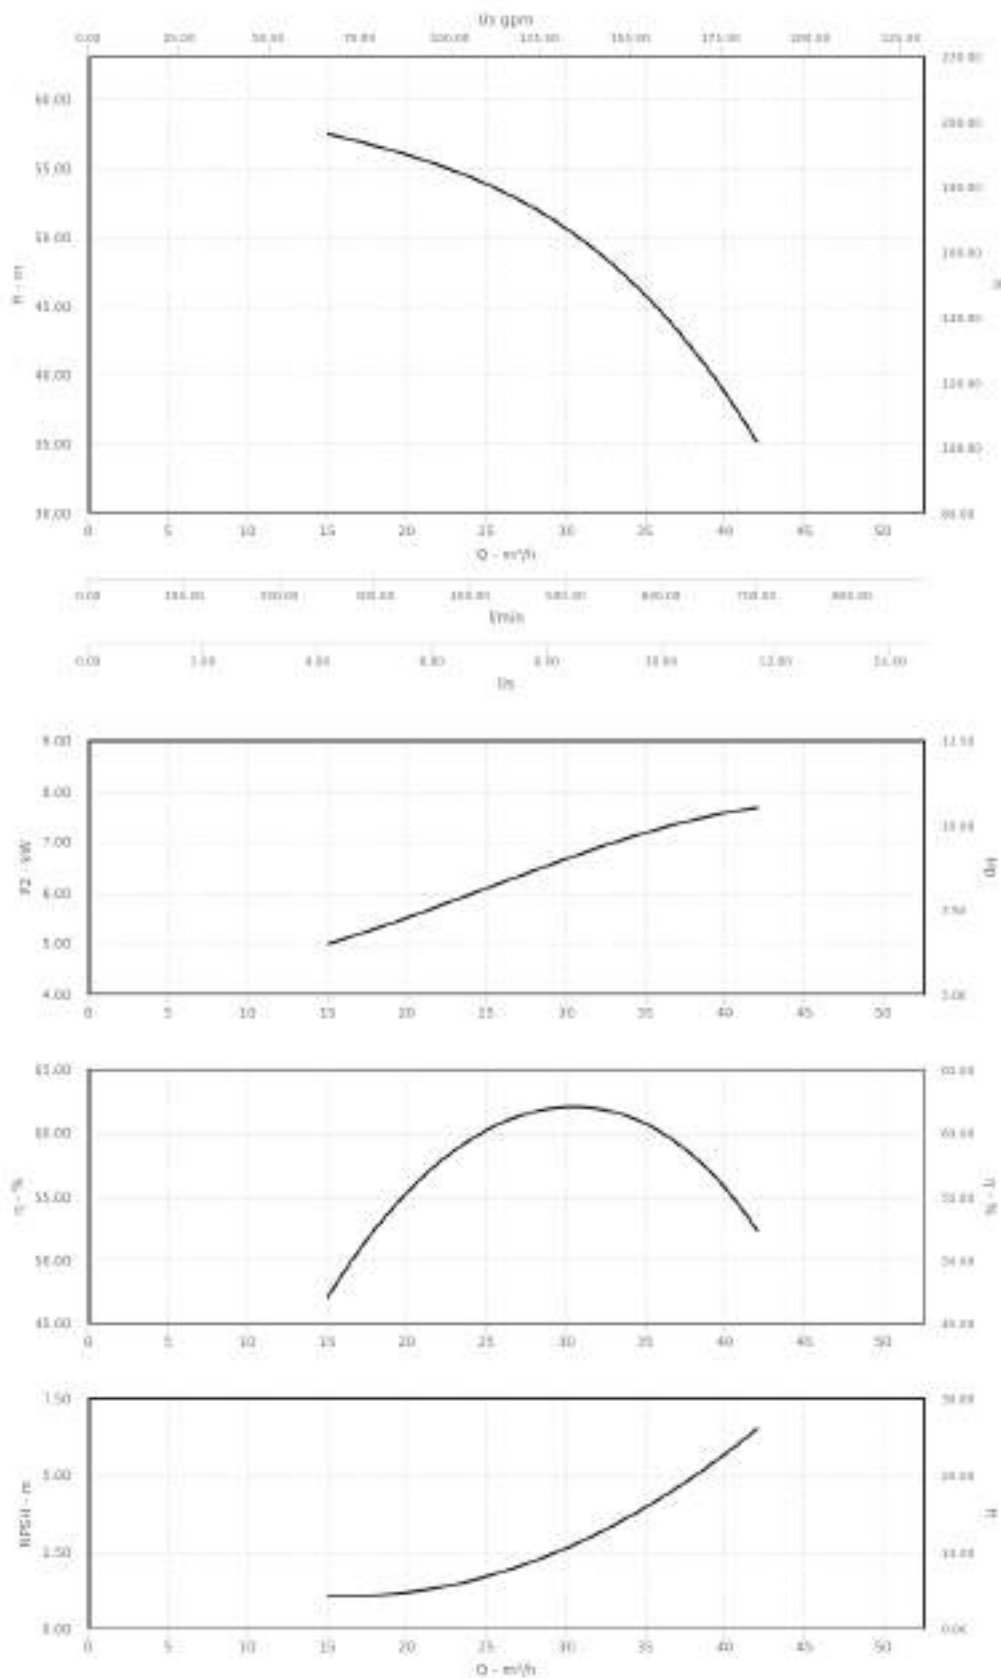

Ficha Técnica: 25/06/2020

60400682000: NM 40/20A/A

DIMENSIONES (MM)

dn1: 65
dn2: 40
a: 100.00 mm
m1: 100.00 mm
m2: 70.00 mm
n1: 265.00 mm
n2: 212.00 mm
n3: 49.00 mm
b: 50.00 mm
l1: 140.00 mm
l2: 140.00 mm
g1: 12.00 mm
h1: 160.00 mm
h2: 180.00 mm
w: 320.00 mm
fM: 525.00 mm

