

Ficha Técnica: 25/06/2020

6040092C000: NM 50/12S/C

FICHA DE BOMBA Y MOTOR


n (rpm):	2900	Fases de motor:	3~
Max presión de trabajo (bar):	10	Un (V):	400/690
H max (m):	26.50	f_q (Hz):	50
H min (m):	11.00	Polos:	2
Q min (mc/h):	30.00	I_n (A):	9.6 / 5.5
Q max (mc/h):	81.00	cosφ:	0.85
P_n (kW):	4.00	Min temperatura de líquido (°C):	-10.00 °C
P_n (HP):	5.50	Peso (kg):	48.300
Diámetro de rodetes (mm):	151.00		

MATERIALES

Cuerpo bomba:	Cast iron GJL 200 EN 1561	Eje:	Chrome steel 1.4104 EN 10088 (AISI 430F)
Acoplamiento motor bomba:	Cast iron GJL 200 EN 1561	Sello mecánico:	Carbon-Ceramic-NBR
Rodete:	Cast iron GJL 200 EN 1561	Contrabridas:	Steel S235JR 1.0038 EN 10025-2

Ficha Técnica: 25/06/2020

6040092C000: NM 50/12S/C

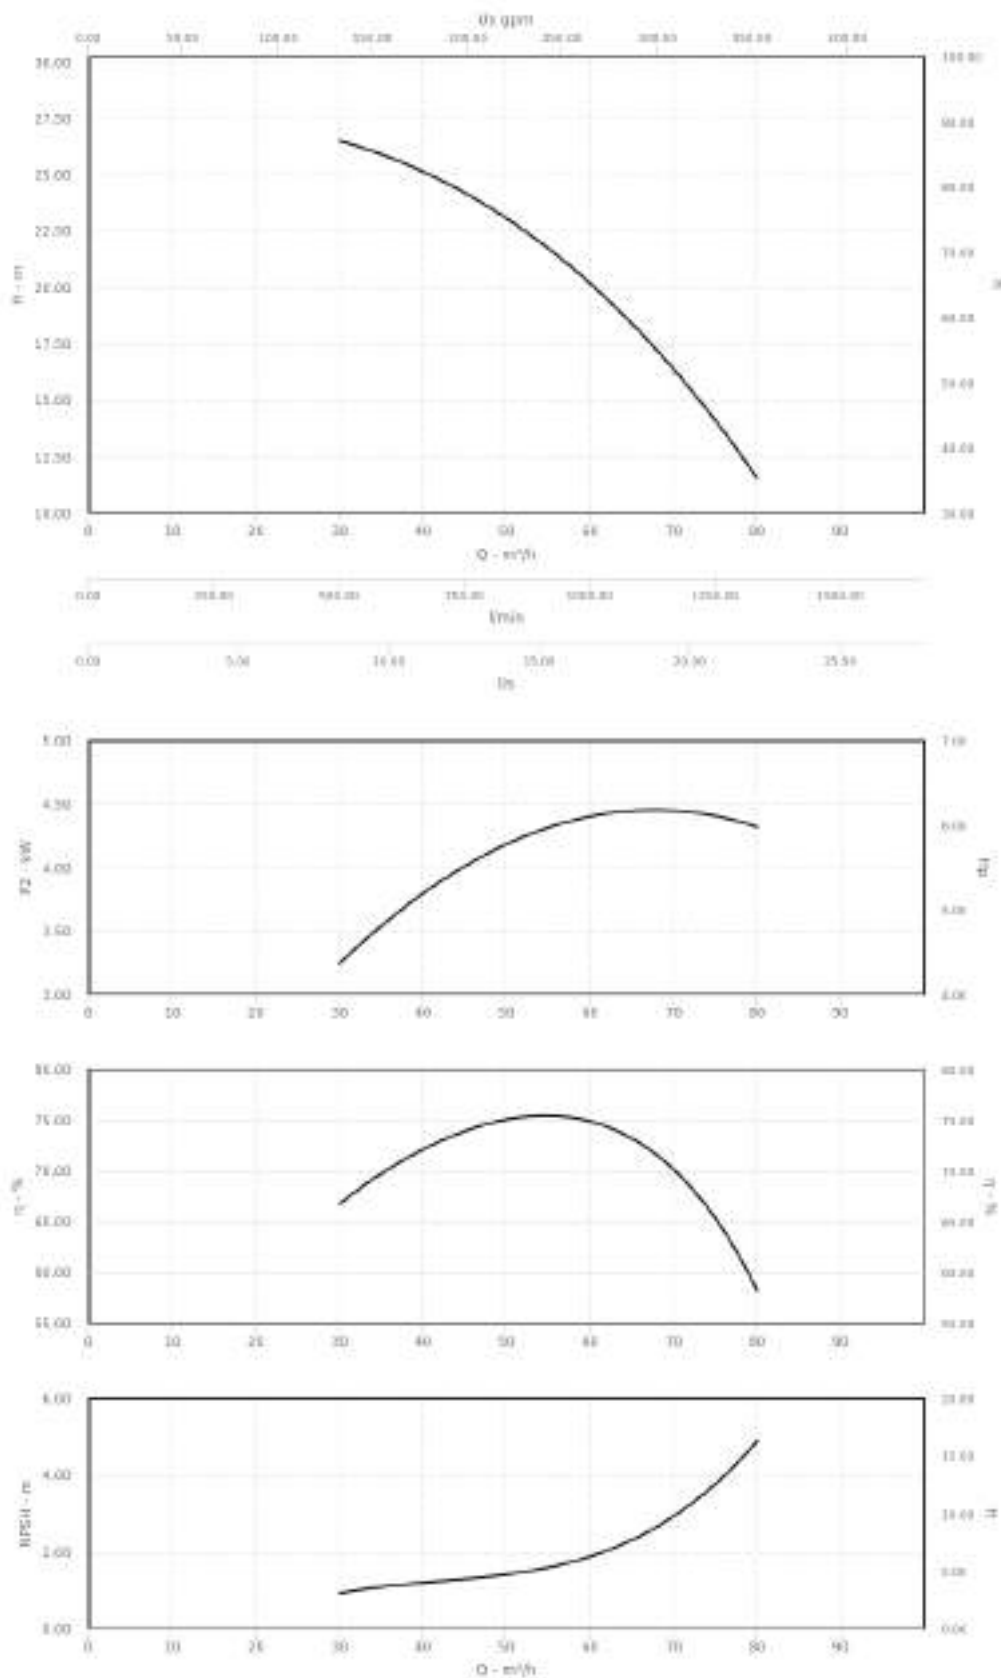

Ficha Técnica: 25/06/2020

6040092C000: NM 50/12S/C

DIMENSIONES (MM)

dn1: 65
dn2: 50
a: 100.00 mm
m1: 100.00 mm
m2: 70.00 mm
n1: 240.00 mm
n2: 190.00 mm
n3: 45.00 mm
b: 50.00 mm
l1: 121.00 mm
l2: 137.00 mm
g1: 12.00 mm
h1: 132.00 mm
h2: 160.00 mm
w: 295.00 mm
fM: 495.00 mm

