

DATA: 07/09/2021

60401083000: NM 50/20A/C

DATI POMPA E MOTORE


n (rpm):	2900	Un (V):	400/690
N. di giranti:	1	fn (Hz):	50
Max pressione di esercizio (bar):	10	Poli:	2
H max (m):	55.00	In (A):	21.5 / 12.4
H min (m):	32.50	PF:	0.85
Q min (mc/h):	24.00	Classe di isolamento:	F
Q max (mc/h):	78.00	Servizio:	S1
Pn (kW):	11.00	Min temperatura del liquido (°C):	-10.00 °C
Pn (HP):	15.00	IE:	IE3-91.2
Diametro girante (mm):	200.00	Peso (kg):	117.900
Tipo motore:	IM	Protezione:	IP 54
Fasi motore:	3~		

MATERIALI

Corpo pompa:	Ghisa GJL 200 EN 1561	Albero:	Acciaio inossidabile al Cr 1.4104
Raccordo:	Ghisa GJL 200 EN 1561		EN 10088 (AISI 430F)
Girante:	Ghisa GJL 200 EN 1561	Tenuta meccanica:	Carbone-Ceramica-NBR

DATA: 07/09/2021

60401083000: NM 50/20A/C

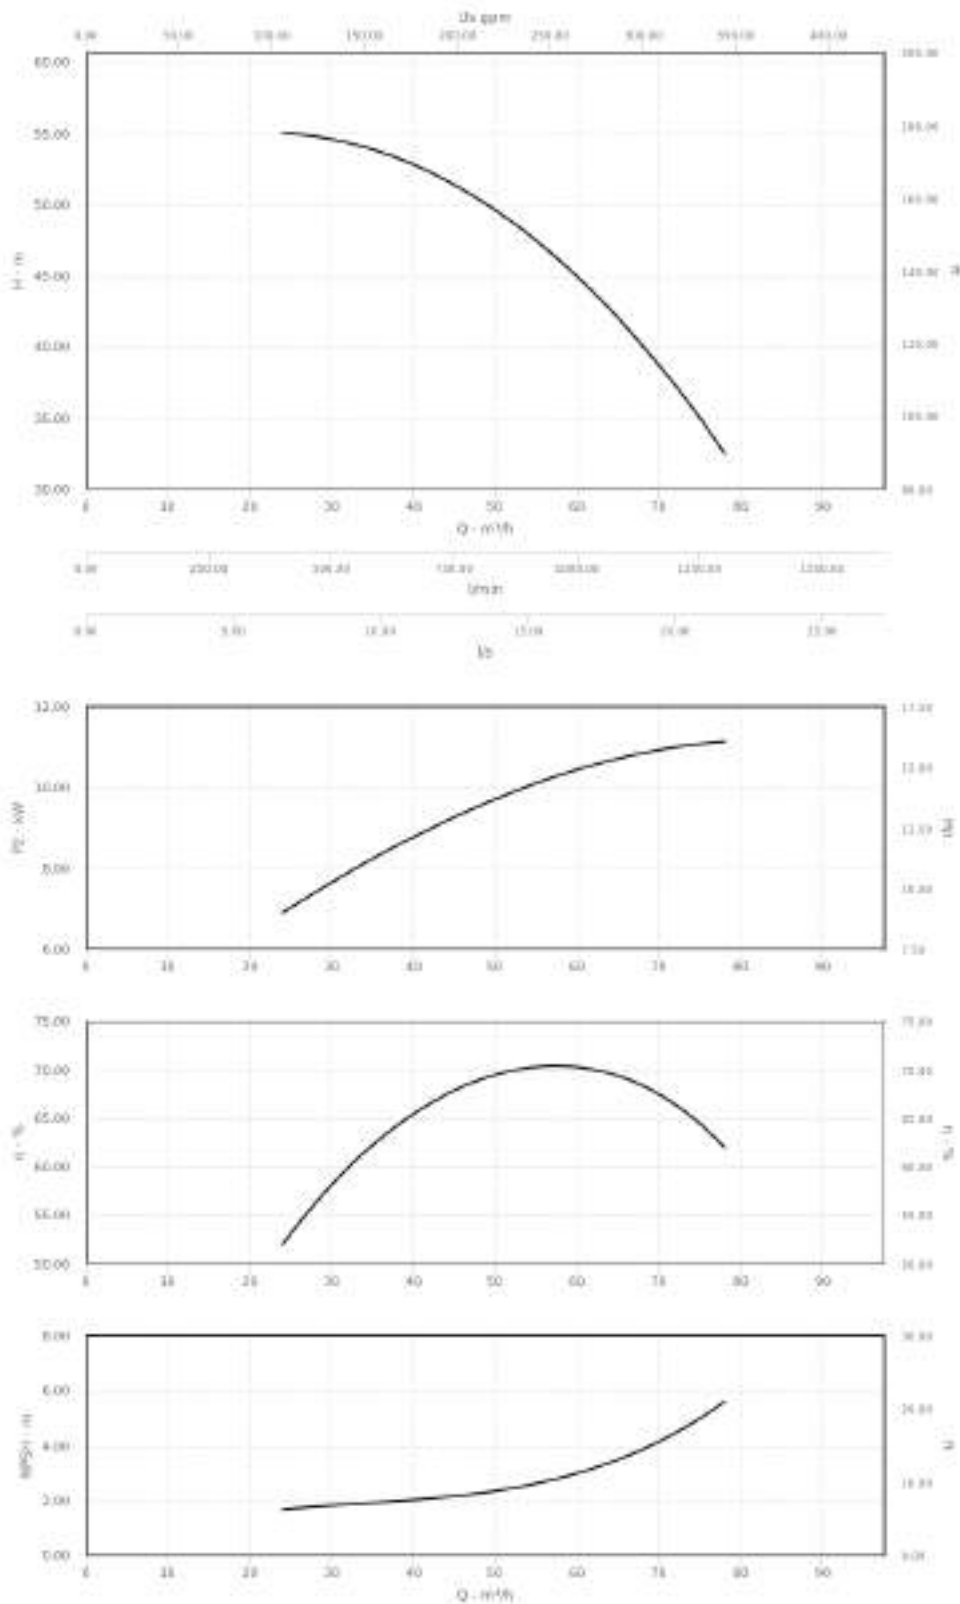

DATA: 07/09/2021

60401083000: NM 50/20A/C

DIMENSIONI (MM)

dn1: 65
dn2: 50
a: 100.00 mm
m1: 100.00 mm
m2: 70.00 mm
n1: 265.00 mm
n2: 212.00 mm
n3: 40.00 mm
b: 50.00 mm
fM: 690.00 mm
l1: 140.00 mm
l2: 153.00 mm
g1: 15.00 mm
h1: 160.00 mm
h2: 200.00 mm
HD: 345.00 mm
w: 460.00 mm

