

Ficha Técnica: 25/06/2020

60401364000: NM 65/12E/C

FICHA DE BOMBA Y MOTOR


n (rpm):	2900	Diámetro de rodetes (mm):	123.00
Max presión de trabajo (bar):	16	Fases de motor:	3~
H max (m):	16.50	Un (V):	400/690
H min (m):	9.20	f_q (Hz):	50
Q min (mc/h):	37.80	Polos:	2
Q max (mc/h):	108.00	In (A):	9.6 / 5.5
P_n (kW):	4.00	Min temperatura de liquido (°C):	-10.00 °C
P_n (HP):	5.50	Peso (kg):	52.000

MATERIALES

Cuerpo bomba:	Cast iron GJL 200 EN 1561	Eje:	Chrome steel 1.4104 EN 10088 (AISI 430F)
Acoplamiento motor bomba:	Cast iron GJL 200 EN 1561	Sello mecánico:	Carbon-Ceramic-NBR
Rodete:	Cast iron GJL 200 EN 1561	Contrabridas:	Steel S235JR 1.0038 EN 10025-2

Ficha Técnica: 25/06/2020

60401364000: NM 65/12E/C

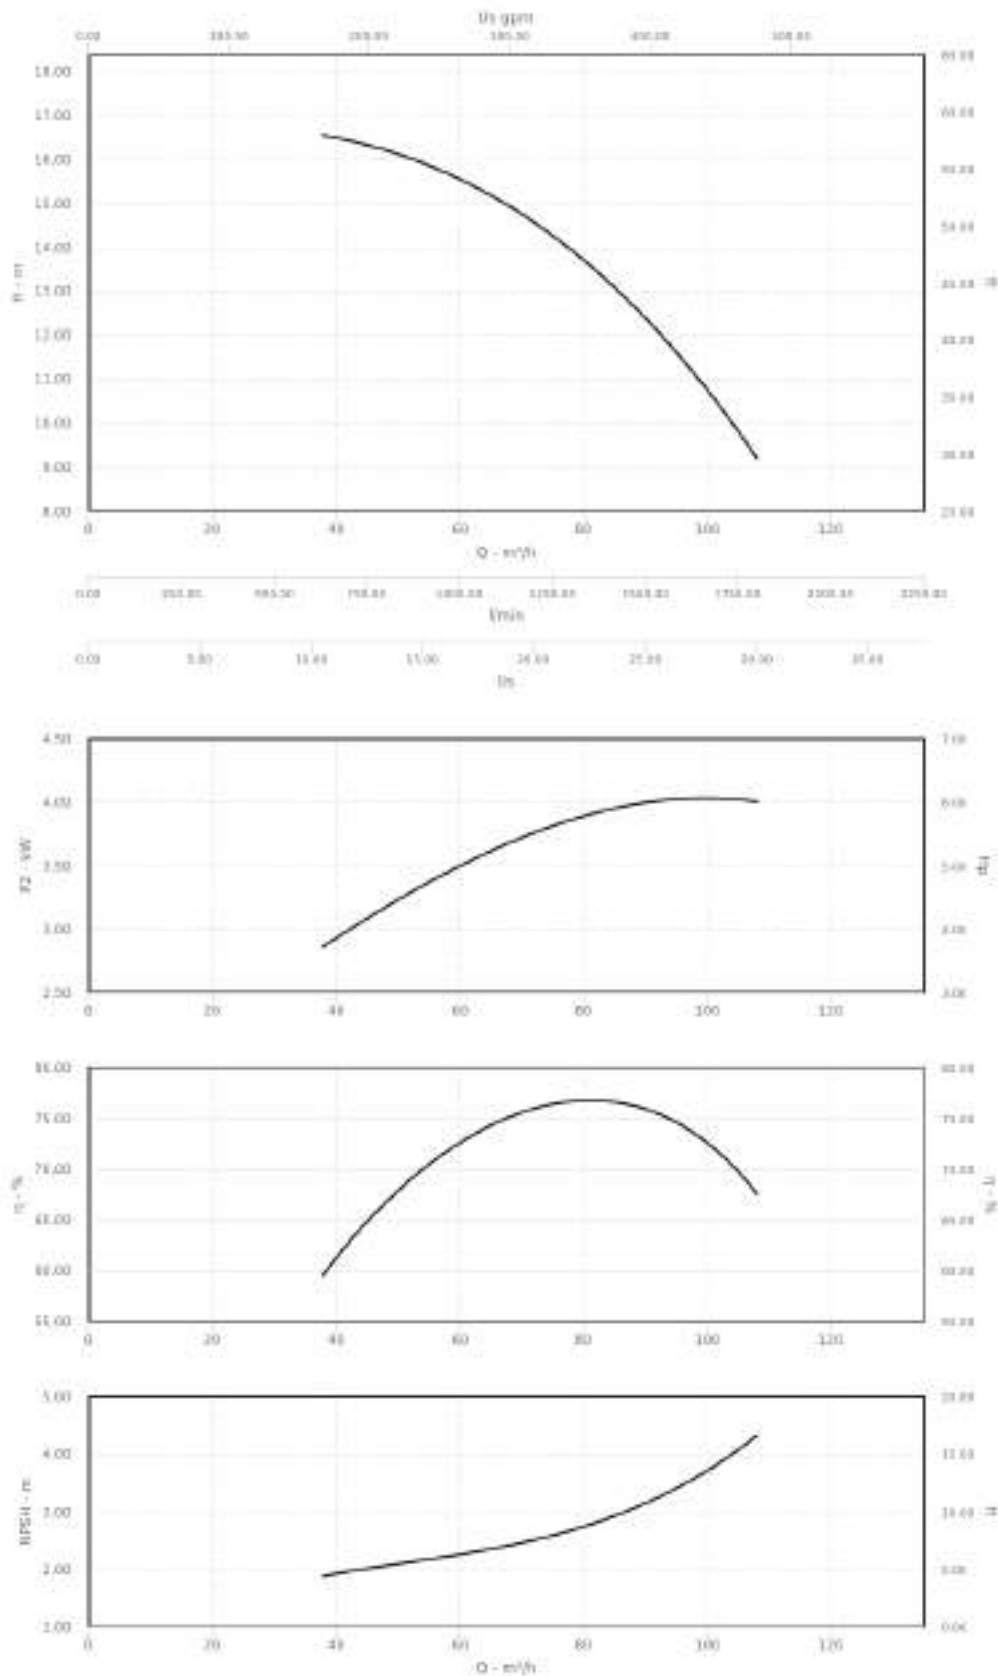

Ficha Técnica: 25/06/2020

60401364000: NM 65/12E/C

DIMENSIONES (MM)

dn1: 80
dn2: 65
a: 100.00 mm
m1: 125.00 mm
m2: 95.00 mm
n1: 280.00 mm
n2: 212.00 mm
n3: 60.00 mm
b: 65.00 mm
l1: 134.00 mm
l2: 156.00 mm
g1: 12.00 mm
h1: 160.00 mm
h2: 180.00 mm
w: 325.00 mm
fM: 495.00 mm

