

Ficha Técnica: 02/07/2020

50001821000: N 80-160C/B

FICHA DE BOMBA Y MOTOR




n (rpm):	2900	Pn (HP):	15.00
Max presión de trabajo (bar):	16	Diámetro de rodetes (mm):	155.00
H max (m):	28.70	f_q (Hz):	50
H min (m):	16.40	Polos:	2
Q min (mc/h):	75.00	Min temperatura de liquido (°C):	-10.00 °C
Q max (mc/h):	180.00	Peso (kg):	47.500
Pn (kW):	11.00		

MATERIALES

Cuerpo bomba:	Cast iron GJL 200 EN 1561	Eje:	Chrome steel 1.4104 EN 10088 (AISI 430F)
Tapa del cuerpo:	Cast iron GJL 200 EN 1561	Sello mecánico:	Carbon-Ceramic-NBR
Rodete:	Cast iron GJL 200 EN 1561	Contrabridas:	Steel S235JR 1.0038 EN 10025-2

Ficha Técnica: 02/07/2020

50001821000: N 80-160C/B

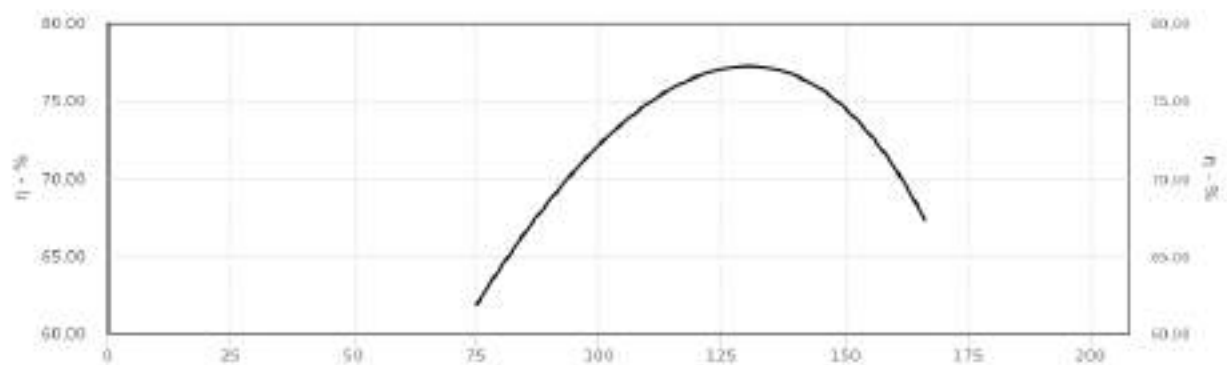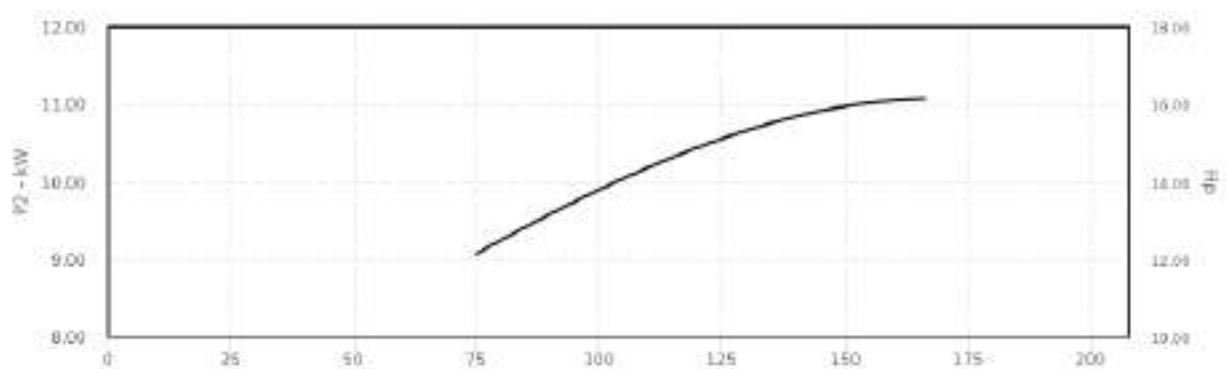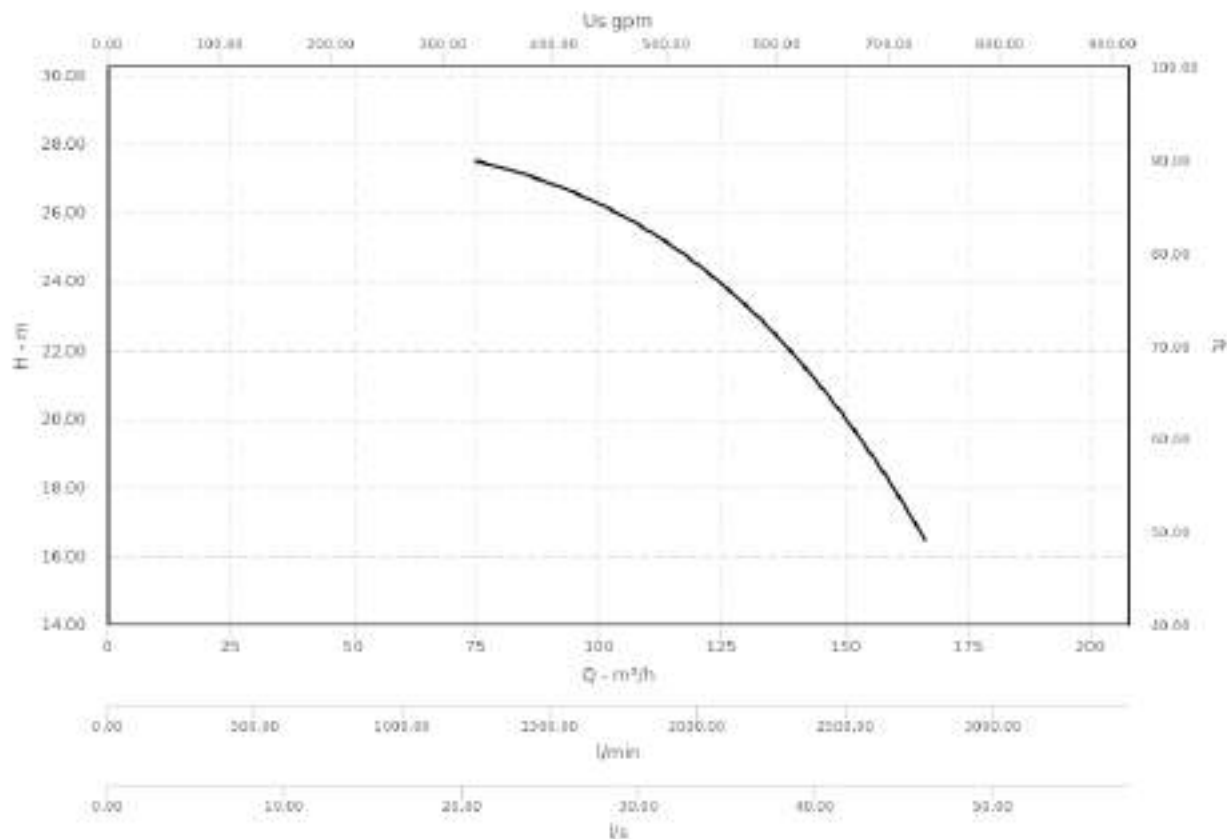

Ficha Técnica: 02/07/2020

50001821000: N 80-160C/B

DIMENSIONES (MM)

dn1: 100
dn2: 80
f: 360.00 mm
a: 125.00 mm
m1: 125.00 mm
m2: 95.00 mm
n1: 320.00 mm
n2: 250.00 mm
n5: 110.00 mm
b: 65.00 mm
l: 50.00 mm
l1: 165.00 mm
l2: 193.00 mm
h1: 180.00 mm
h2: 225.00 mm
w: 260.00 mm
x: 140.00 mm

