

Ficha Técnica: 02/07/2020

50001841000: N4 80-160C/B

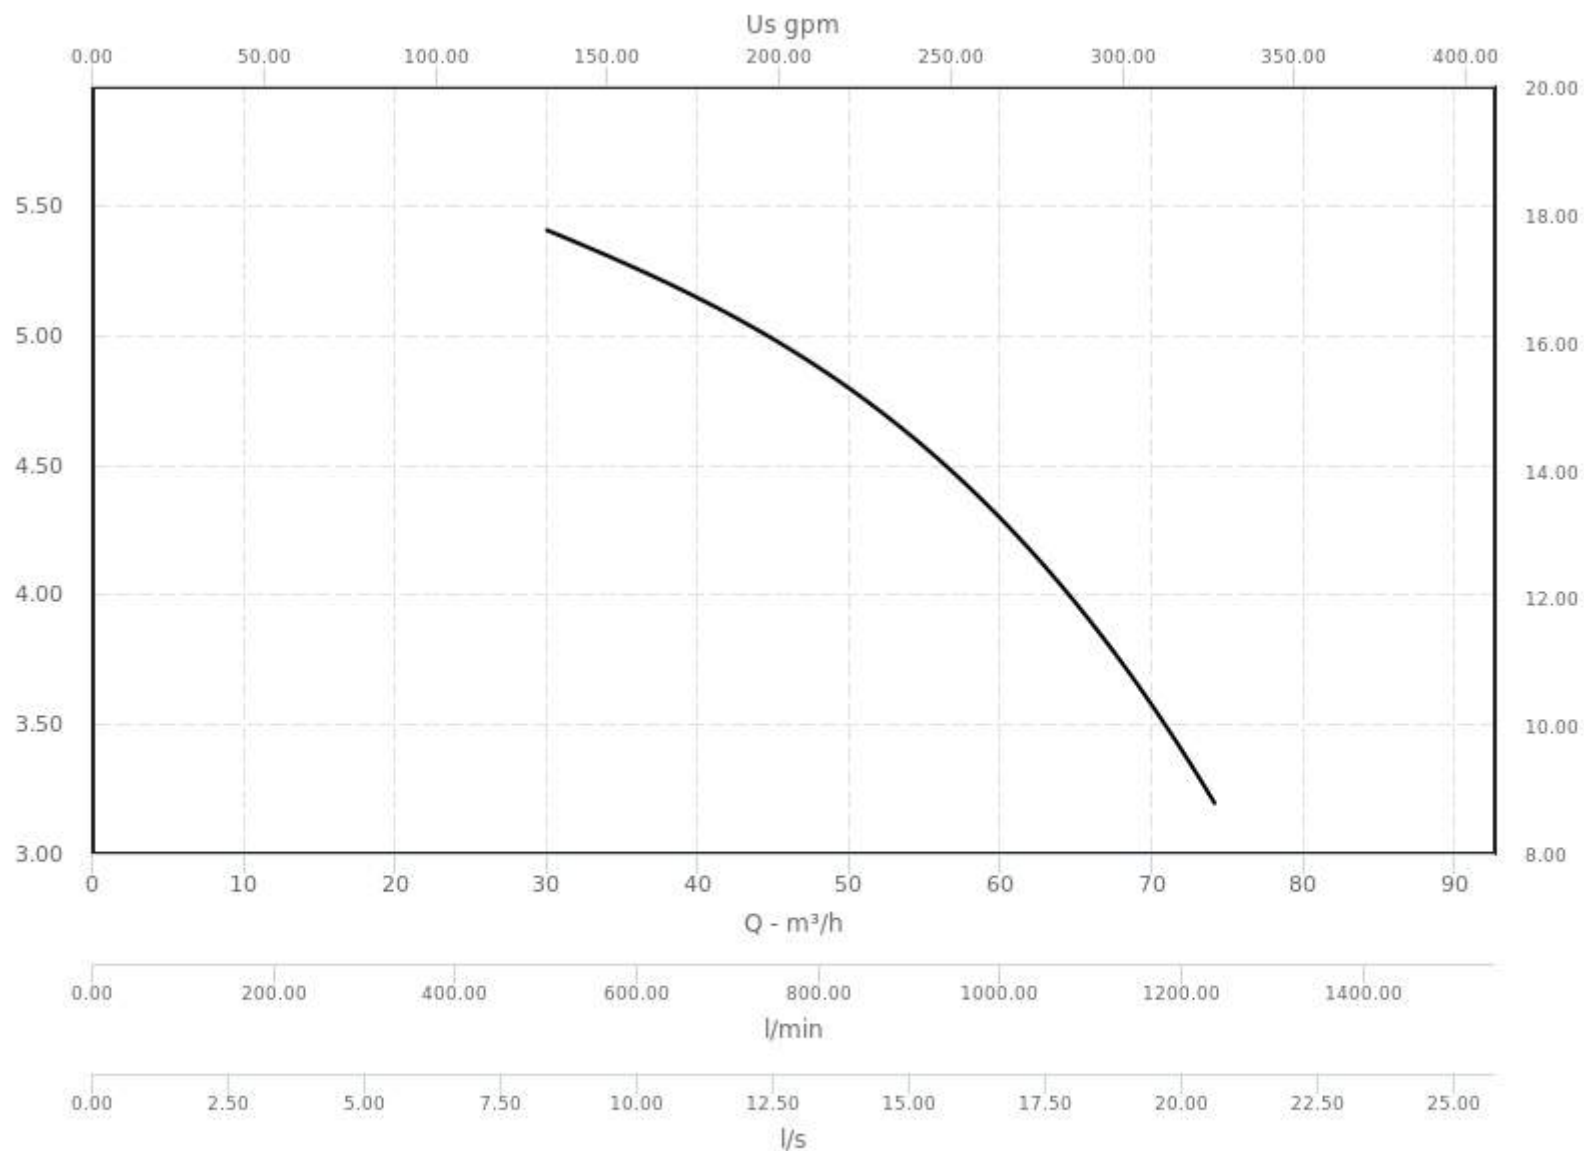
FICHA DE BOMBA Y MOTOR

n (rpm):	1450	Pn (kW):	1.10
Max presión de trabajo (bar):	16	Pn (HP):	1.50
H max (m):	6.10	Diámetro de rodetes (mm):	144.00
H min (m):	3.30	f_q (Hz):	50
Q min (mc/h):	30.00	Polos:	4
Q max (mc/h):	84.00	Min temperatura de liquido (°C):	-10.00 °C

MATERIALES

Cuerpo bomba:	Cast iron GJL 200 EN 1561	Eje:	Chrome steel 1.4104 EN 10088
Tapa del cuerpo:	Cast iron GJL 200 EN 1561		(AISI 430F)
Rodete:	Cast iron GJL 200 EN 1561	Sello mecánico:	Carbon-Ceramic-NBR
		Contrabridas:	Steel S235JR 1.0038 EN 10025-2

Ficha Técnica: 02/07/2020

50001841000: N4 80-160C/B

Ficha Técnica: 02/07/2020

50001841000: N4 80-160C/B

DIMENSIONES (MM)

dn1: 100
dn2: 80
f: 360.00 mm
a: 125.00 mm
m1: 125.00 mm
m2: 95.00 mm
n1: 320.00 mm
n2: 250.00 mm
n5: 110.00 mm
b: 65.00 mm
l: 50.00 mm
l1: 165.00 mm
l2: 193.00 mm
h1: 180.00 mm
h2: 225.00 mm
w: 260.00 mm
x: 140.00 mm

