

Ficha Técnica: 02/07/2020

50002420000: N4 100-200B/A

FICHA DE BOMBA Y MOTOR


n (rpm):	1450	Pn (kW):	4.00
Max presión de trabajo (bar):	10	Pn (HP):	5.50
H max (m):	12.00	Diámetro de rodetes (mm):	202.00
H min (m):	4.50	f_q (Hz):	50
Q min (mc/h):	48.00	Polos:	4
Q max (mc/h):	168.00	Min temperatura de liquido (°C):	-10.00 °C

MATERIALES

Cuerpo bomba:	Cast iron GJL 200 EN 1561	Eje:	Chrome steel 1.4104 EN 10088
Tapa del cuerpo:	Cast iron GJL 200 EN 1561		(AISI 430F)
Rodete:	Cast iron GJL 200 EN 1561	Sello mecánico:	Carbon-Ceramic-NBR
		Contrabridas:	Steel S235JR 1.0038 EN 10025-2

Ficha Técnica: 02/07/2020

50002420000: N4 100-200B/A

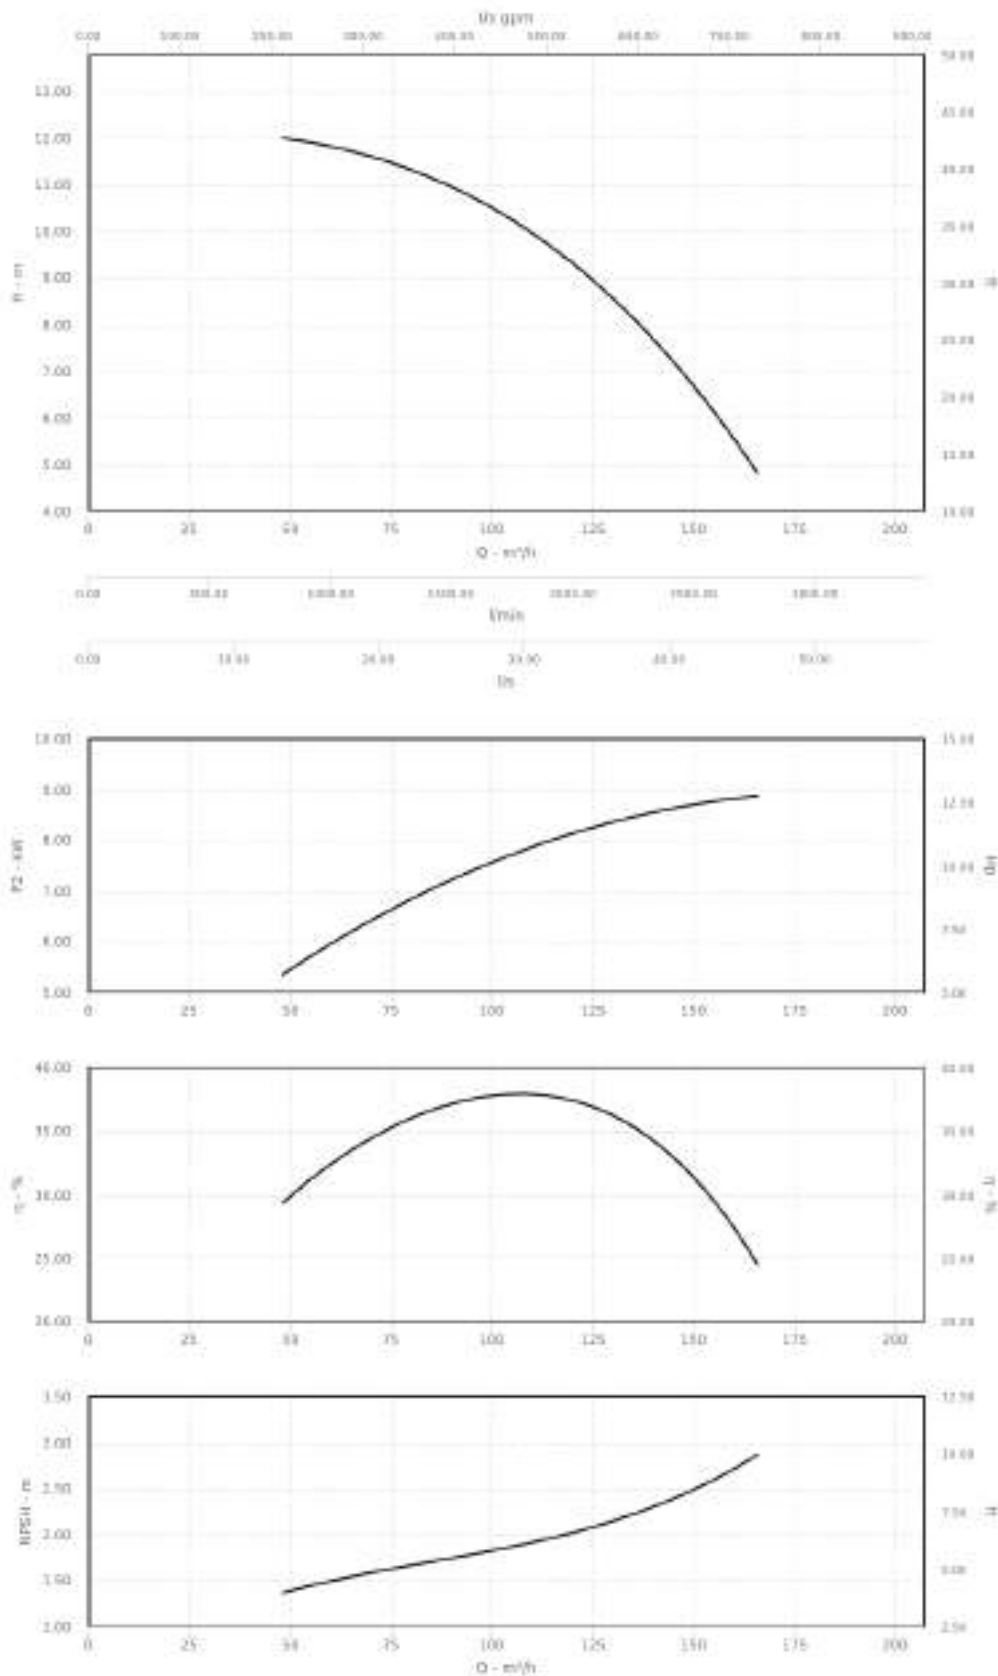

Ficha Técnica: 02/07/2020

50002420000: N4 100-200B/A

DIMENSIONES (MM)

dn1: 125
dn2: 100
f: 470.00 mm
a: 125.00 mm
m1: 160.00 mm
m2: 120.00 mm
n1: 360.00 mm
n2: 280.00 mm
n5: 110.00 mm
b: 80.00 mm
l: 80.00 mm
l1: 180.00 mm
l2: 212.00 mm
h1: 200.00 mm
h2: 280.00 mm
w: 340.00 mm
x: 140.00 mm

