

Ficha Técnica: 02/07/2020

50002880000: N4 125-400A/A

FICHA DE BOMBA Y MOTOR


n (rpm):	1450	Pn (HP):	75.00
Max presión de trabajo (bar):	10	Diámetro de rodetes (mm):	405.00
H max (m):	59.20	f_q (Hz):	50
H min (m):	42.50	Polos:	4
Q min (mc/h):	84.00	Min temperatura de liquido (°C):	-10.00 °C
Q max (mc/h):	330.00	Peso (kg):	221.400
Pn (kW):	55.00		

MATERIALES

Cuerpo bomba:	Cast iron GJL 200 EN 1561	Eje:	Chrome steel 1.4104 EN 10088 (AISI 430F)
Tapa del cuerpo:	Cast iron GJL 200 EN 1561	Sello mecánico:	Carbon-Ceramic-NBR
Rodete:	Cast iron GJL 200 EN 1561	Contrabridas:	Steel S235JR 1.0038 EN 10025-2

Ficha Técnica: 02/07/2020

50002880000: N4 125-400A/A

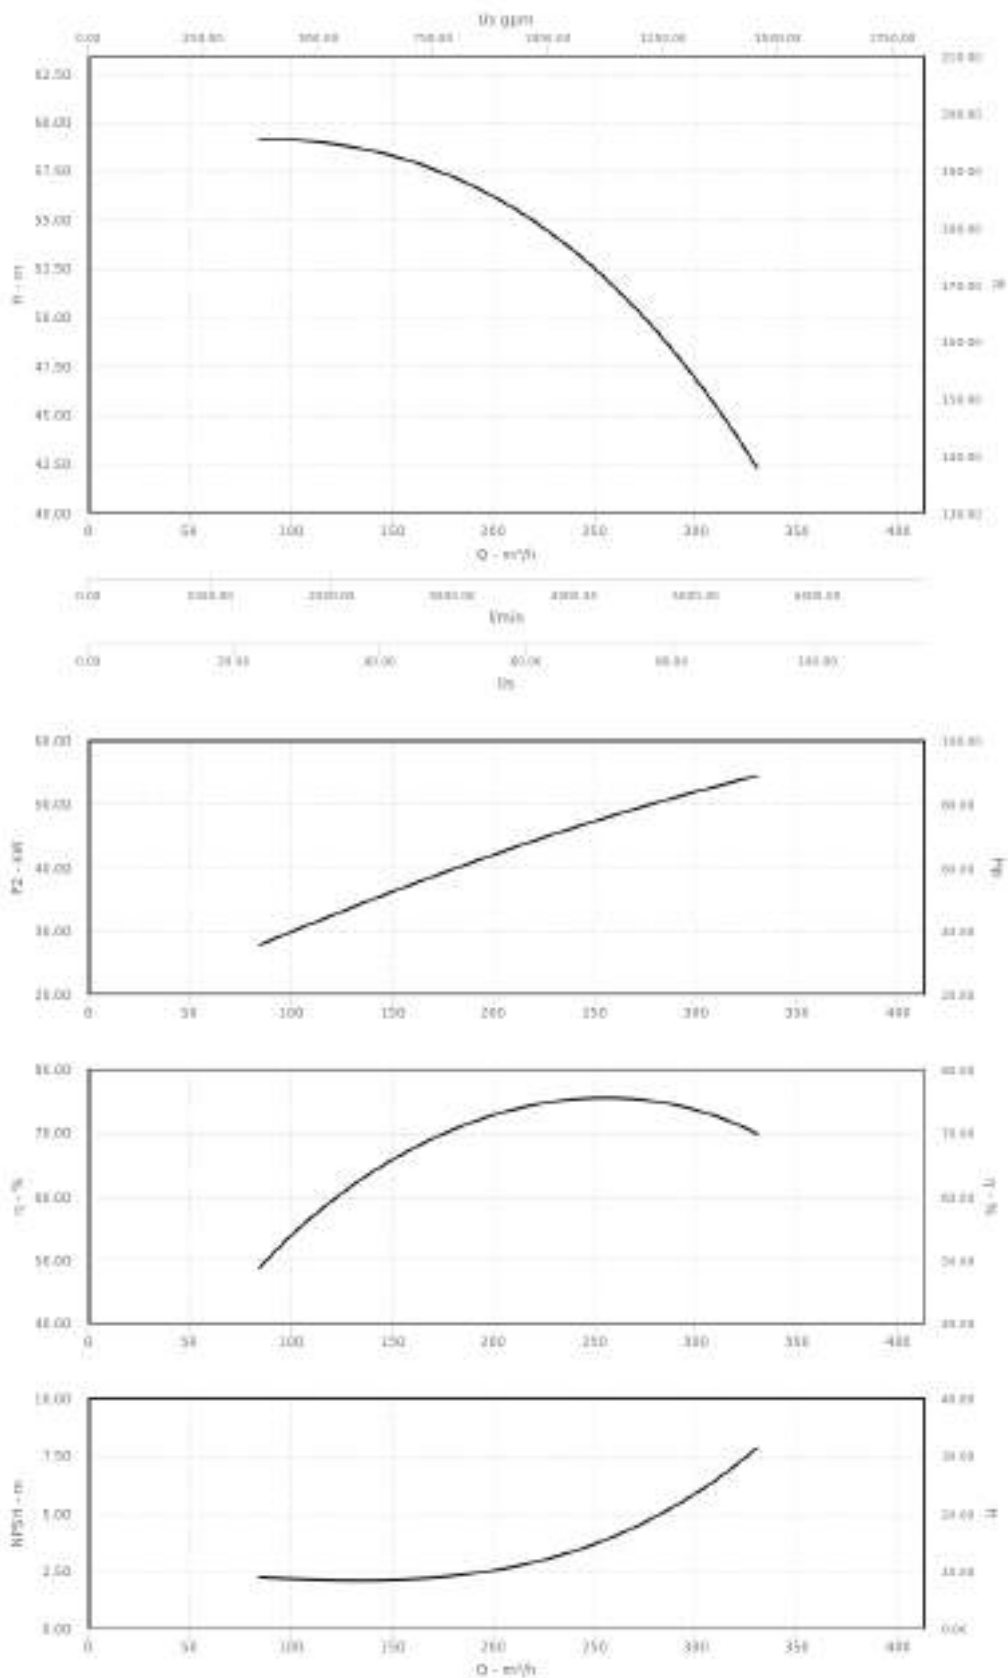

Ficha Técnica: 02/07/2020

50002880000: N4 125-400A/A

DIMENSIONES (MM)

dn1: 150
dn2: 125
f: 530.00 mm
a: 140.00 mm
m1: 200.00 mm
m2: 150.00 mm
n1: 500.00 mm
n2: 400.00 mm
n5: 110.00 mm
b: 100.00 mm
s2: 14
l: 110.00 mm
l1: 280.00 mm
l2: 305.00 mm
t: 45.00 mm
u: 12.00 mm
h1: 315.00 mm
h2: 400.00 mm
d: 42
w: 370.00 mm
x: 140.00 mm

