

Ficha Técnica: 25/06/2020

62312051000: MXHM 805/A

FICHA DE BOMBA Y MOTOR


n (rpm):	2800	f_q (Hz):	50
Max presión de trabajo (bar):	8	Polos:	2
H max (m):	54.00	I_n (A):	11.2
H min (m):	24.00	cosφ:	0.98
Q min (mc/h):	5.00	C (mF):	50
Q max (mc/h):	13.00	V_c (V):	450
P_n (kW):	1.80	Min temperatura de liquido (°C):	-15.00 °C
P_n (HP):	2.50	Max temperatura de liquido (°C):	110
Fases de motor:	1~	P₁ (kW):	2.50 kW
U_n (V):	230	Peso (kg):	22.400

MATERIALES

Cuerpo bomba:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Anillo cierre:	PTFE
Tapa del cuerpo:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Manguito distanciador:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)
Cuerpo elemento:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Eje:	Cr-Ni steel 1.4305 EN 10088 (AISI 303)
Rodete:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Sello mecánico:	Ceramic Alumina-Carbon-EPDM

Ficha Técnica: 25/06/2020

62312051000: MXHM 805/A

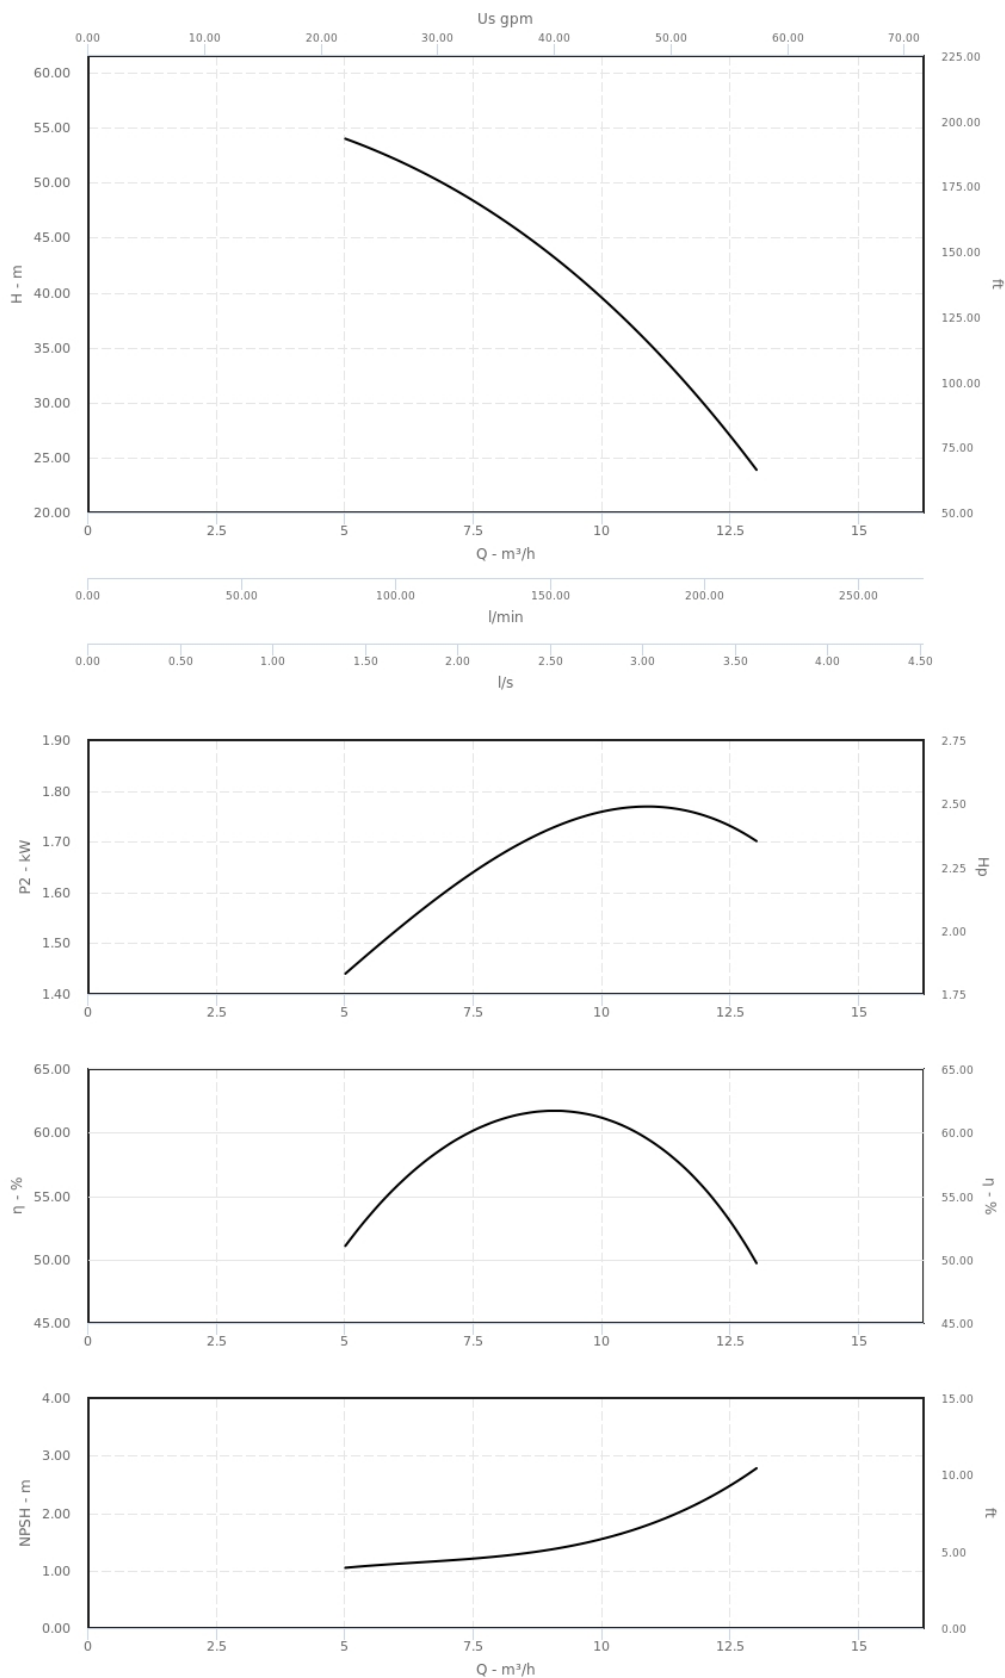

Ficha Técnica: 25/06/2020

62312051000: MXHM 805/A

DIMENSIONES (MM)

dn1: G 1 ½
dn2: G 1
a: 178.00 mm
m1: 31.00 mm
m3: 10.00 mm
n1: 146.00 mm
n2: 112.00 mm
b: 30.50 mm
fM: 552.00 mm
s: 10
l5: 160
g1: 10.50 mm
h1: 127.00 mm
h2: 57.00 mm
HD: 210.00 mm
w: 88.00 mm
w1: 207.00 mm

