

Ficha Técnica: 25/06/2020

62253031000: MXH 1603/B

FICHA DE BOMBA Y MOTOR


n (rpm):	2800	Fases de motor:	3~
Max presión de trabajo (bar):	8	Un (V):	230/400
H max (m):	34.00	f_q (Hz):	50
H min (m):	8.80	Polos:	2
Q min (mc/h):	5.00	In (A):	8.3 / 4.8
Q max (mc/h):	25.00	cosφ:	0.8
P_n (kW):	1.80	Min temperatura de líquido (°C):	-15.00 °C
P_n (HP):	2.50	Peso (kg):	20.850
Diámetro de rodetes (mm):	104.00		

MATERIALES

Cuerpo bomba:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Anillo cierre:	PTFE
Tapa del cuerpo:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Manguito distanciador:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)
Cuerpo elemento:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Eje:	Cr-Ni steel 1.4305 EN 10088 (AISI 303)
Rodete:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Sello mecánico:	Ceramic Alumina-Carbon-EPDM

Ficha Técnica: 25/06/2020

62253031000: MXH 1603/B

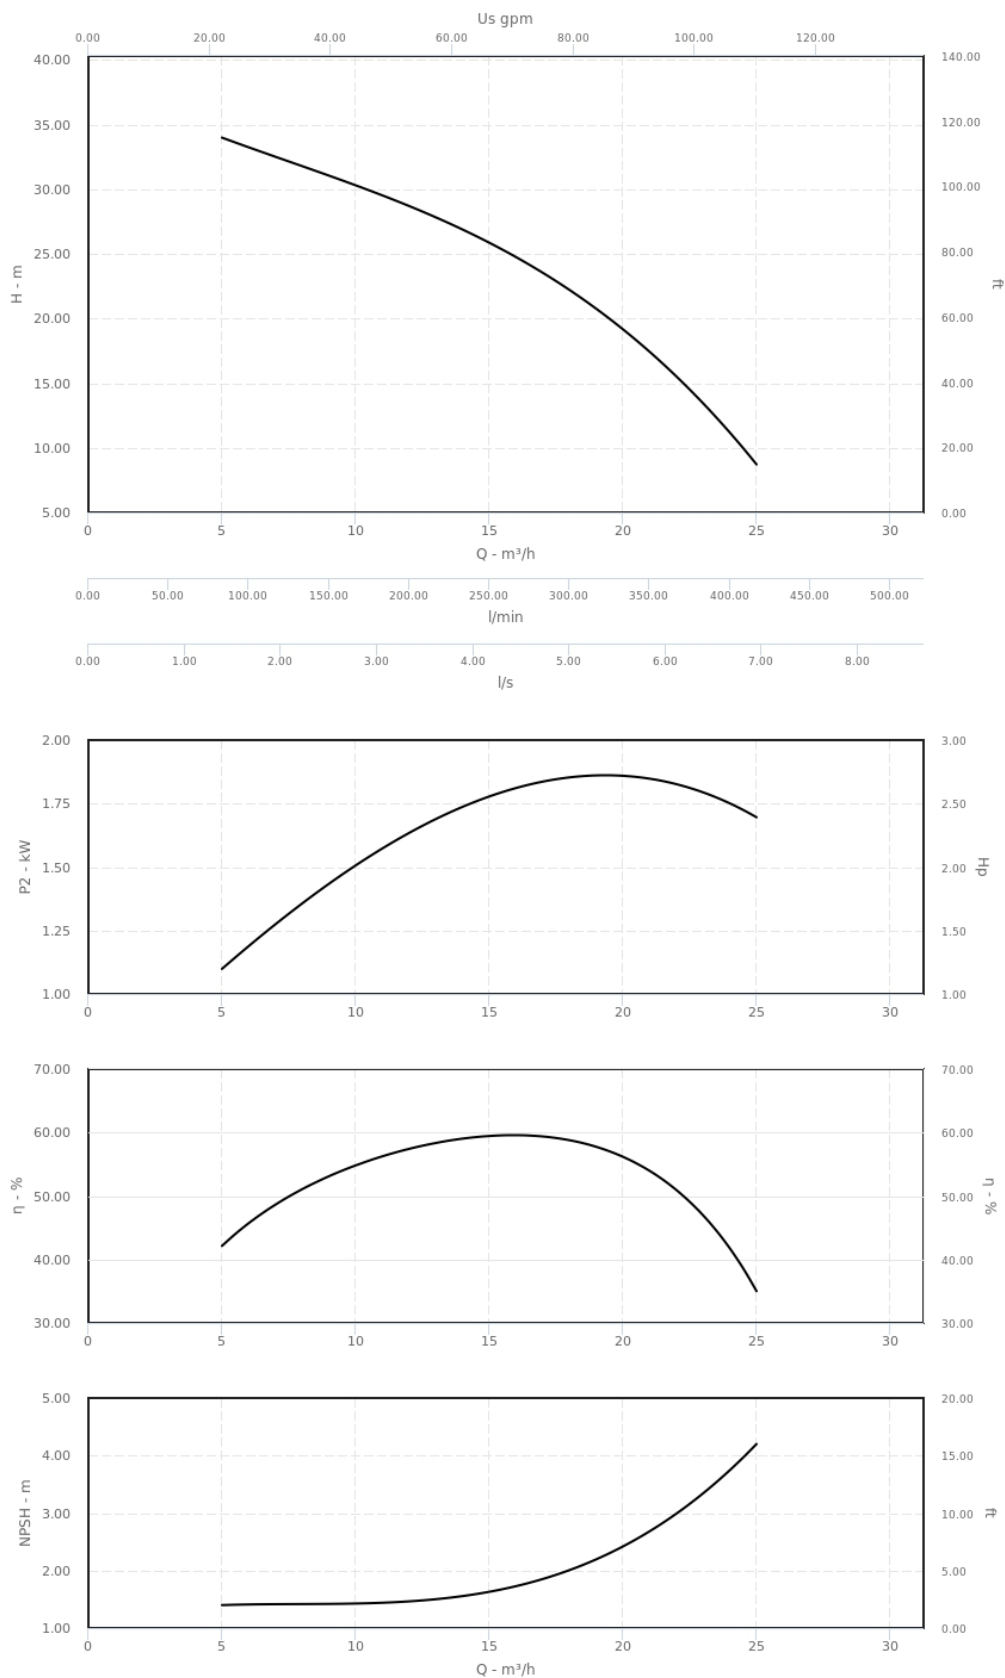

Ficha Técnica: 25/06/2020

62253031000: MXH 1603/B

DIMENSIONES (MM)

dn1: G 2
dn2: G 1 ½
a: 128.00 mm
m1: 31.00 mm
m3: 10.00 mm
n1: 146.00 mm
n2: 112.00 mm
b: 30.50 mm
fM: 516.00 mm
s: 10
I5: 160
g1: 10.50 mm
h1: 117.00 mm
h2: 70.00 mm
HD: 210.00 mm
w: 101.00 mm
w1: 207.00 mm

