

Ficha Técnica: 25/06/2020

62253061000: MXH 1606/B

FICHA DE BOMBA Y MOTOR


n (rpm):	2800	Fases de motor:	3~
Max presión de trabajo (bar):	8	Un (V):	400/690
H max (m):	68.00	fq (Hz):	50
H min (m):	22.00	Polos:	2
Q min (mc/h):	5.00	In (A):	9.6 / 5.5
Q max (mc/h):	25.00	cosφ:	0.85
Pn (kW):	4.00	Min temperatura de liquido (°C):	-15.00 °C
Pn (HP):	5.50	Peso (kg):	36.800
Diámetro de rodetes (mm):	104.00		

MATERIALES

Cuerpo bomba:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Anillo cierre:	PTFE
Tapa del cuerpo:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Manguito distanciador:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)
Cuerpo elemento:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Eje:	Cr-Ni steel 1.4305 EN 10088 (AISI 303)
Rodete:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Sello mecánico:	Ceramic Alumina-Carbon-EPDM

Ficha Técnica: 25/06/2020

62253061000: MXH 1606/B

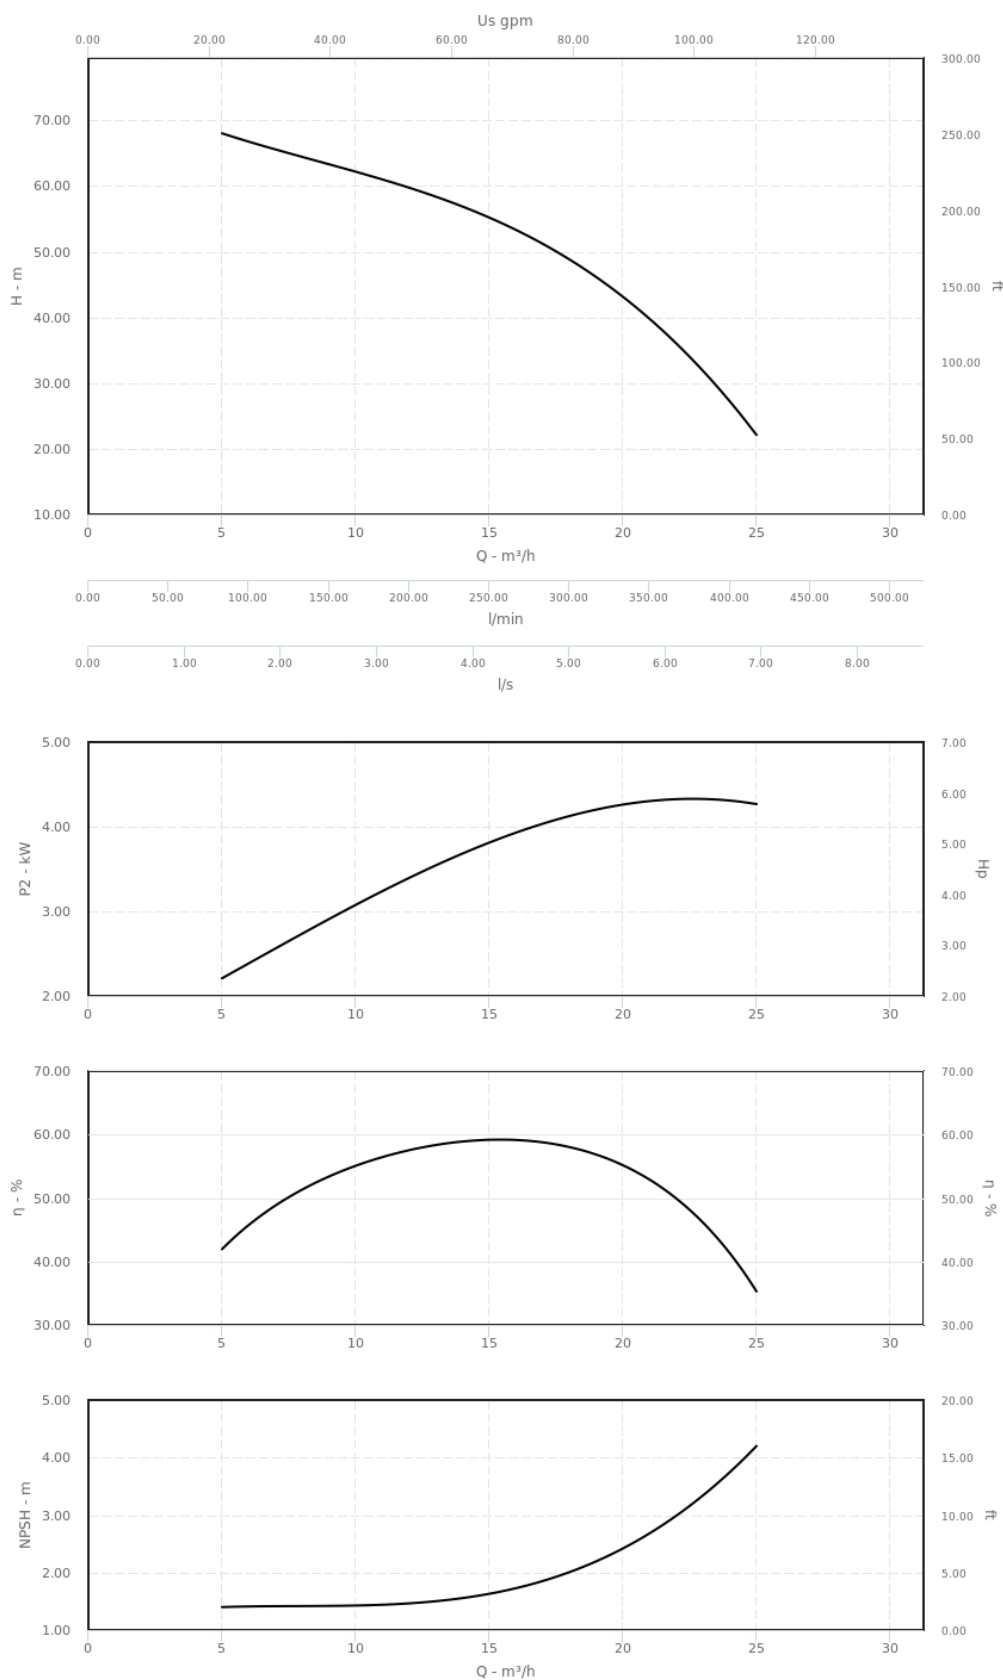

Ficha Técnica: 25/06/2020

62253061000: MXH 1606/B

DIMENSIONES (MM)

dn1: G 2
dn2: G 1 ½
a: 241.00 mm
m1: 44.00 mm
m3: 12.00 mm
n1: 146.00 mm
n2: 112.00 mm
b: 38.00 mm
fM: 687.00 mm
s: 10
I5: 160
g1: 10.50 mm
h1: 132.00 mm
h2: 70.00 mm
HD: 235.00 mm
w: 113.00 mm
w1: 232.00 mm

