

Ficha Técnica: 25/06/2020

62254021000: MXH 3202/B

FICHA DE BOMBA Y MOTOR


n (rpm):	2900	Fases de motor:	3~
Max presión de trabajo (bar):	10	Un (V):	400/690
H max (m):	33.00	f_q (Hz):	50
H min (m):	7.50	Polos:	2
Q min (mc/h):	15.00	In (A):	9.6 / 5.5
Q max (mc/h):	50.00	cosφ:	0.81
P_n (kW):	4.00	Min temperatura de líquido (°C):	-15.00 °C
P_n (HP):	5.50	Peso (kg):	37.800
Diámetro de rodetes (mm):	124.00		

MATERIALES

Cuerpo bomba:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Anillo cierre:	PTFE
Tapa del cuerpo:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Manguito distanciador:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)
Cuerpo elemento:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Eje:	Cr-Ni-Mo steel 1.4401 EN 10088 (AISI 316)
Rodete:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Sello mecánico:	Ceramic Alumina-Carbon-EPDM

Ficha Técnica: 25/06/2020

62254021000: MXH 3202/B

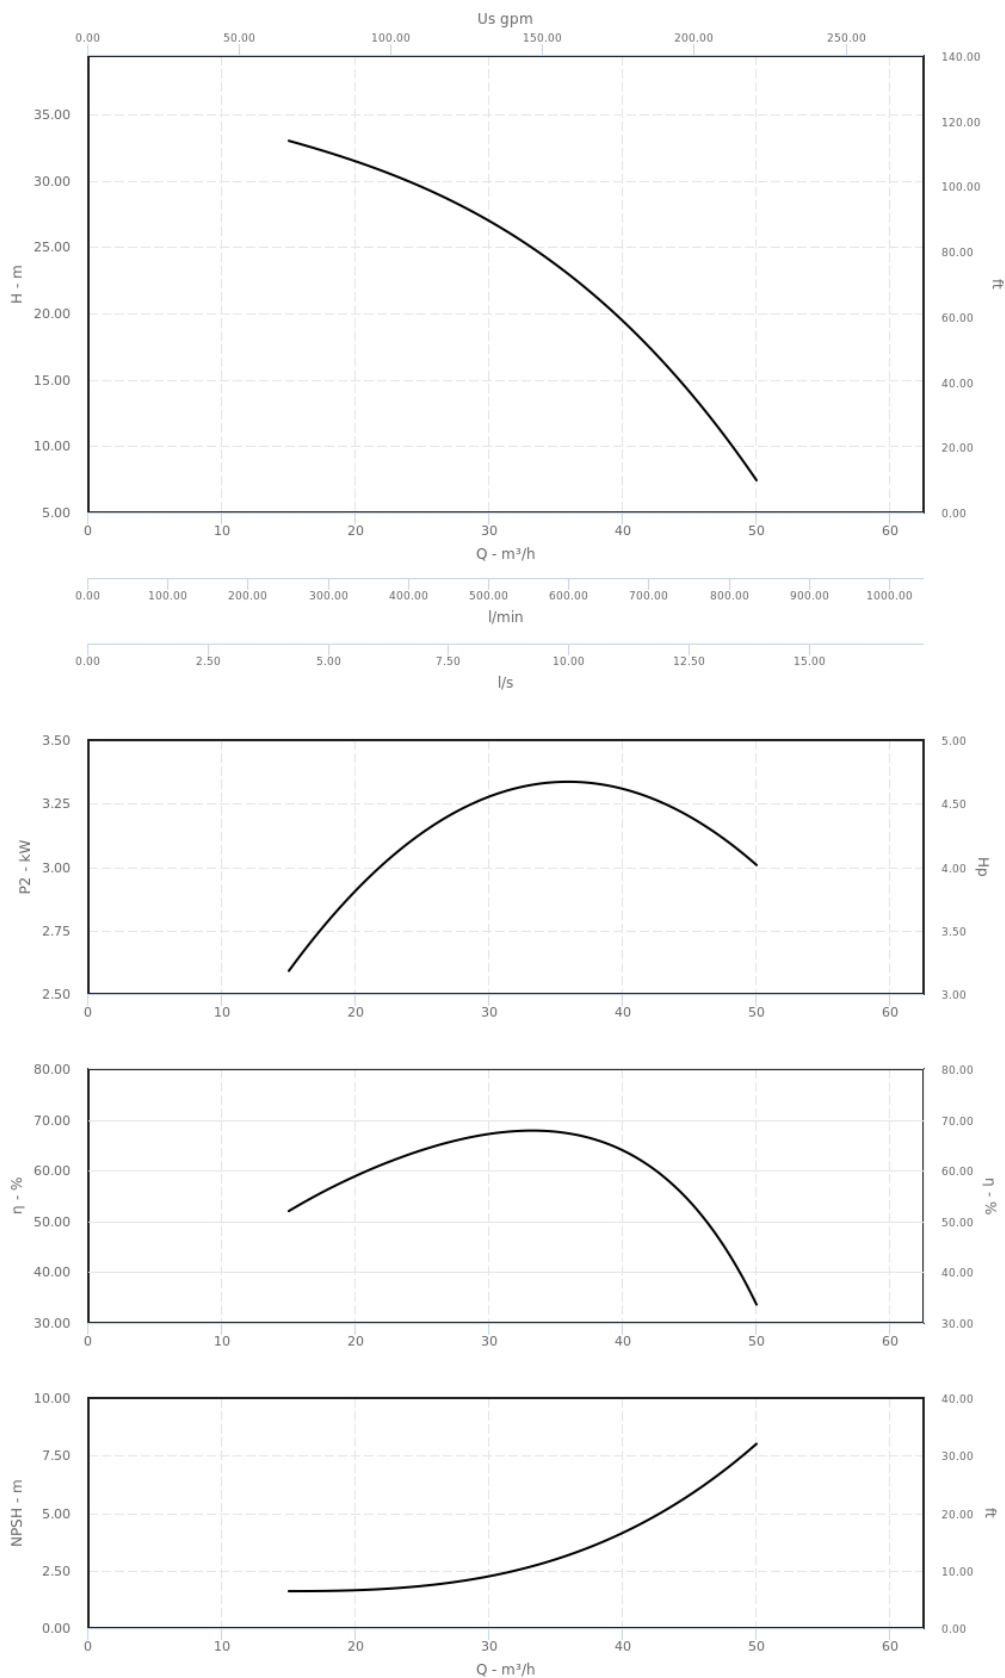

Ficha Técnica: 25/06/2020

62254021000: MXH 3202/B

DIMENSIONES (MM)

dn1: G 2 ½
dn2: G 2
a: 123.00 mm
m4: 205.00 mm
m5: 175.00 mm
n4: 180.00 mm
n5: 140.00 mm
b1: 54.00 mm
fM: 517.50 mm
l5: 250
g2: 6.00 mm
h2: 140.00 mm
h3: 150.00 mm
HD: 290.00 mm
w: 112.00 mm
w1: 15.00 mm

