

Ficha Técnica: 25/06/2020

62244031000: MXH 3203/A

FICHA DE BOMBA Y MOTOR


n (rpm):	2900	Fases de motor:	3~
Max presión de trabajo (bar):	10	Un (V):	400/690
H max (m):	50.00	fq (Hz):	50
H min (m):	10.00	Polos:	2
Q min (mc/h):	15.00	In (A):	10.8 / 6.2
Q max (mc/h):	50.00	cosf:	0.84
Pn (kW):	5.50	Min temperatura de liquido (°C):	-15.00 °C
Pn (HP):	7.50	Peso (kg):	50.000

MATERIALES

Cuerpo bomba:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Anillo cierre:	PTFE
Tapa del cuerpo:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Manguito distanciador:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)
Cuerpo elemento:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Eje:	Cr-Ni-Mo steel 1.4401 EN 10088 (AISI 316)
Rodete:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Sello mecánico:	Ceramic Alumina-Carbon-EPDM

Ficha Técnica: 25/06/2020

62244031000: MXH 3203/A

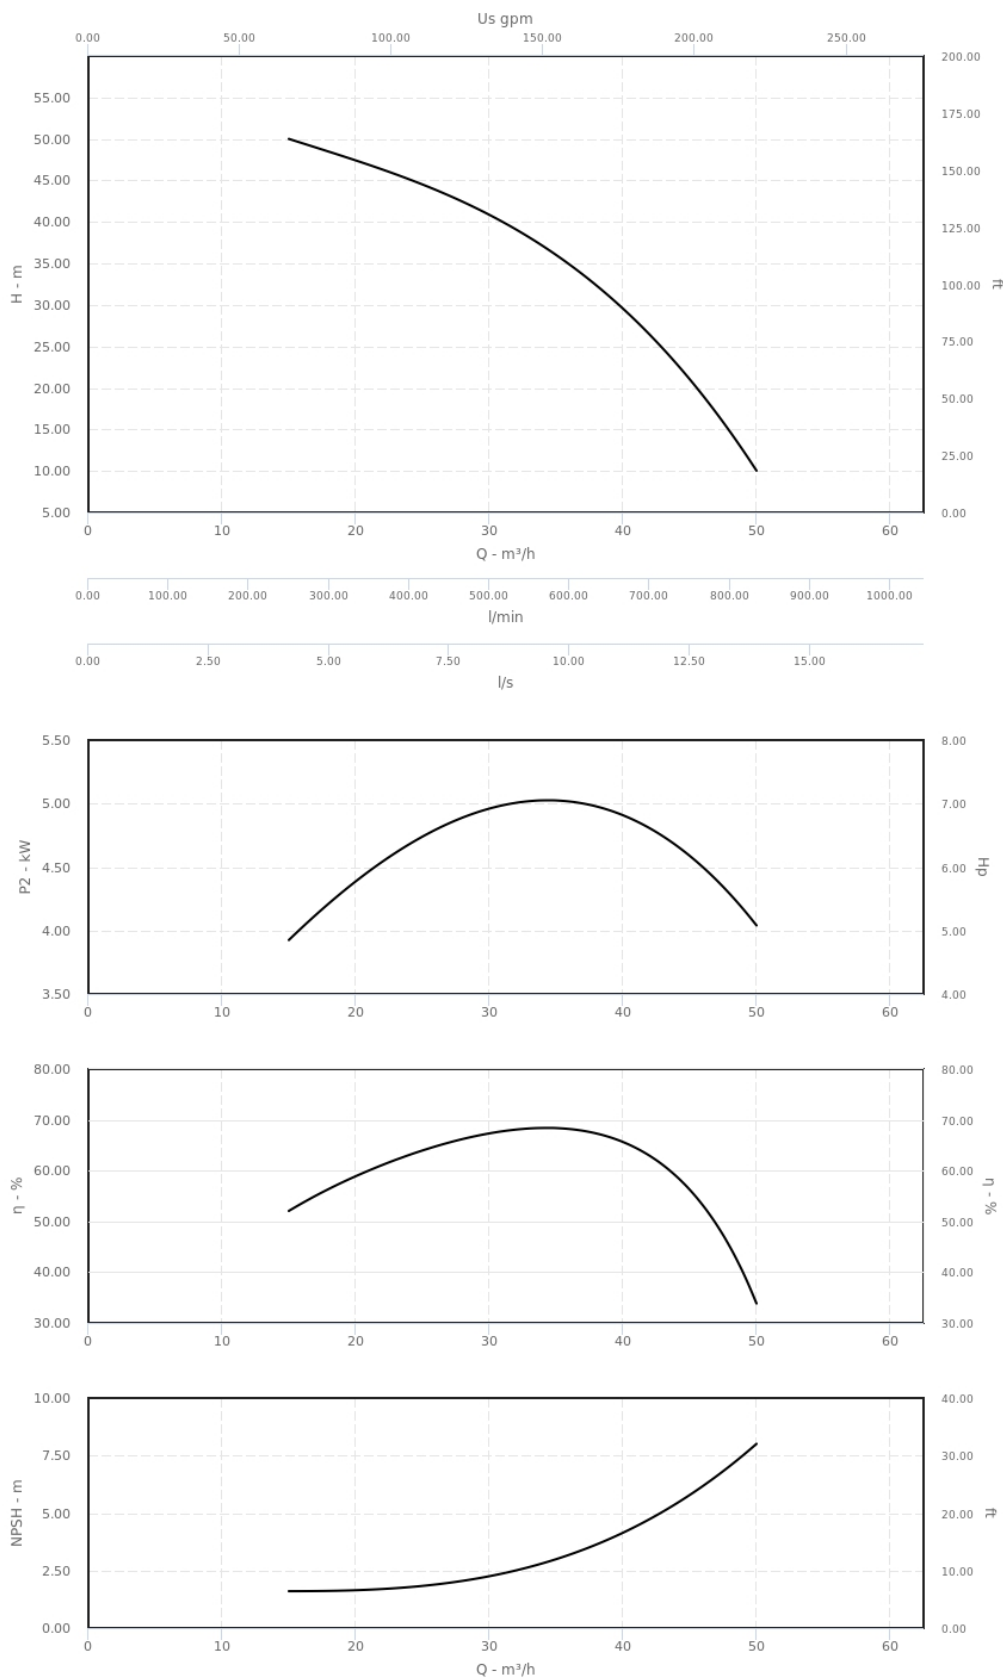

Ficha Técnica: 25/06/2020

62244031000: MXH 3203/A

DIMENSIONES (MM)

dn1: G 2 ½
dn2: G 2
a: 169.00 mm
m4: 280.00 mm
m5: 250.00 mm
n4: 258.00 mm
n5: 190.00 mm
b1: 68.00 mm
fM: 584.50 mm
I5: 250
g2: 38.00 mm
h2: 140.00 mm
h3: 150.00 mm
HD: 310.00 mm
w: 84.00 mm
w1: 15.00 mm

