

Ficha Técnica: 25/06/2020

66301041000: MXPM 404/A

FICHA DE BOMBA Y MOTOR


n (rpm):	2800	Un (V):	230
Max presión de trabajo (bar):	8	f_q (Hz):	50
H max (m):	40.00	Polos:	2
H min (m):	16.00	I_n (A):	5.4
Q min (mc/h):	2.25	cosφ:	0.96
Q max (mc/h):	7.20	C (mF):	20
P_n (kW):	0.75	V_c (V):	450
P_n (HP):	1.00	Max temperatura de líquido (°C):	50
Fases de motor:	1~	Peso (kg):	10.800

MATERIALES

Cuerpo bomba:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Rodete:	Noryl PPO-GF20
Tapa del cuerpo:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Eje:	Chrome steel 1.4104 EN 10088 (AISI 430F)
Cuerpo elemento:	Noryl PPO-GF20	Sello mecánico:	Carbon-Ceramic-NBR

Ficha Técnica: 25/06/2020

66301041000: MXPM 404/A

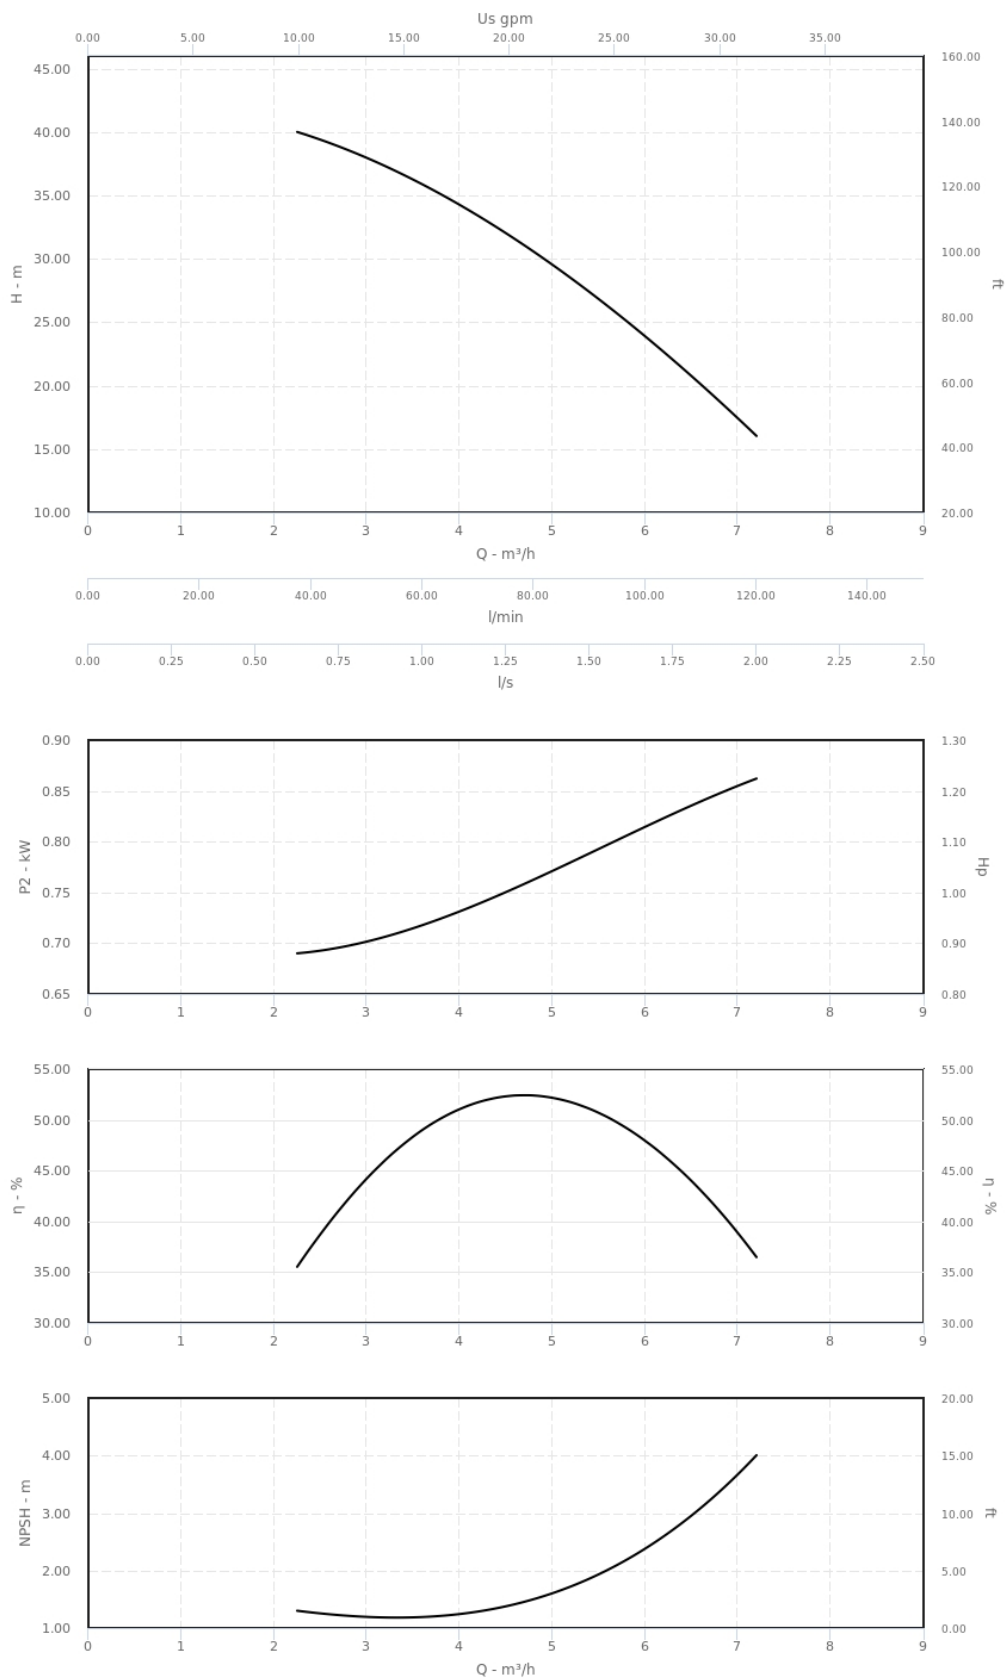

Ficha Técnica: 25/06/2020

66301041000: MXPM 404/A

DIMENSIONES (MM)

dn1: G 1
dn2: G 1
a: 115.00 mm
m1: 33.00 mm
m2: 25.00 mm
m3: 8.00 mm
n1: 146.00 mm
n2: 112.00 mm
b: 30.00 mm
fM: 391.00 mm
I5: 161
g1: 10.00 mm
h1: 116.00 mm
h2: 61.00 mm
HD: 192.00 mm
w: 95.00 mm
w1: 112.00 mm

