

Ficha Técnica: 25/06/2020

70B51040000: NGLM 4/110

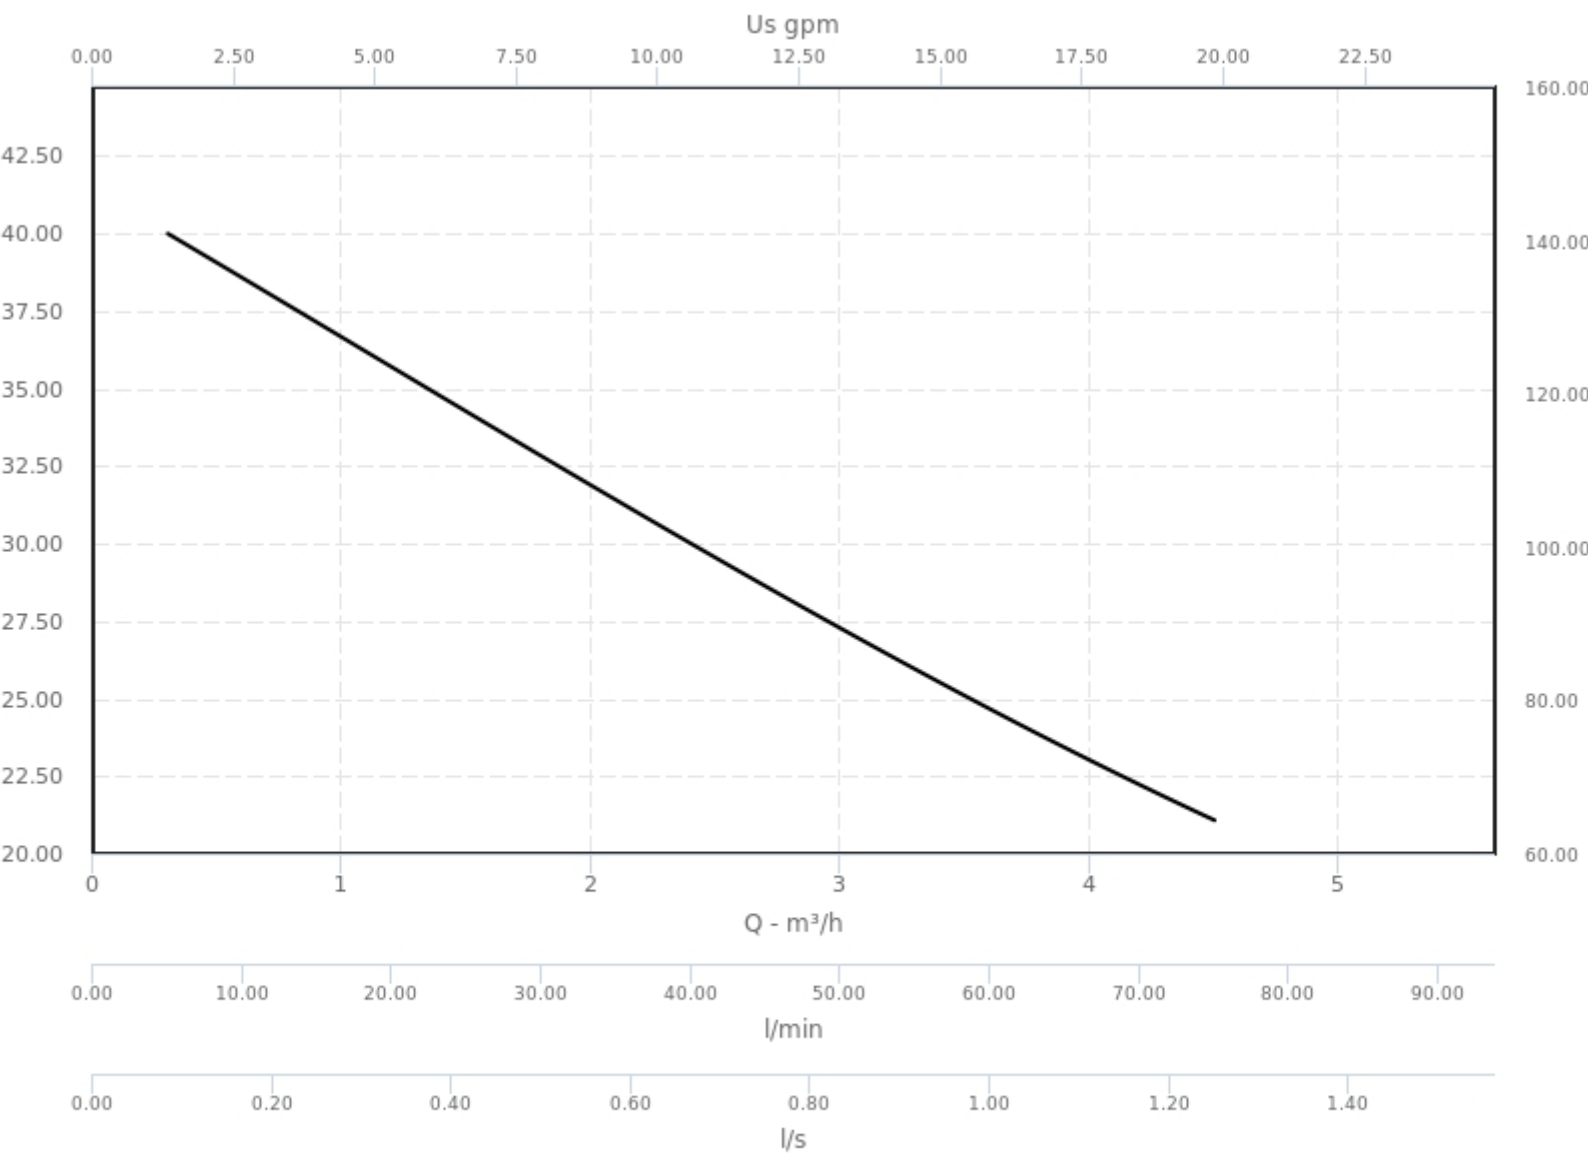
FICHA DE BOMBA Y MOTOR

n (rpm):	2800	Un (V):	230
Max presión de trabajo (bar):	8	f_q (Hz):	50
H max (m):	40.00	Polos:	2
H min (m):	21.10	In (A):	5.4
Q min (mc/h):	0.30	cosφ:	0.96
Q max (mc/h):	4.50	C (mF):	20
P_n (kW):	0.75	V_c (V):	450
P_n (HP):	1.00	Max temperatura de líquido	35
Diámetro de rodetes (mm):	130.00	(°C):	
Fases de motor:	1~	Peso (kg):	13.020

MATERIALES

Cuerpo bomba:	Cast iron GJL 200 EN 1561	Difusor:	Noryl PPO-GF20
Tapa del cuerpo:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Inyector:	Noryl PPO-GF20
Rodete:	Noryl PPO-GF20	Eje:	Chrome steel 1.4104 EN 10088 (AISI 430F)
Anillo cierre:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Sello mecánico:	Carbon-Ceramic-NBR

Ficha Técnica: 25/06/2020

70B51040000: NGLM 4/110

Ficha Técnica: 25/06/2020

70B51040000: NGLM 4/110

DIMENSIONES (MM)

a: 115.00 mm
m1: 33.00 mm
m2: 25.00 mm
m3: 8.00 mm
n1: 146.00 mm
n2: 112.00 mm
b: 30.00 mm
l: 161.00 mm
g1: 10.00 mm
h1: 116.00 mm
h2: 61.00 mm
w: 95.00 mm
w1: 112.00 mm
fM: 391.00 mm

