

Ficha Técnica: 25/06/2020

72B50044100: NGXM 6/18

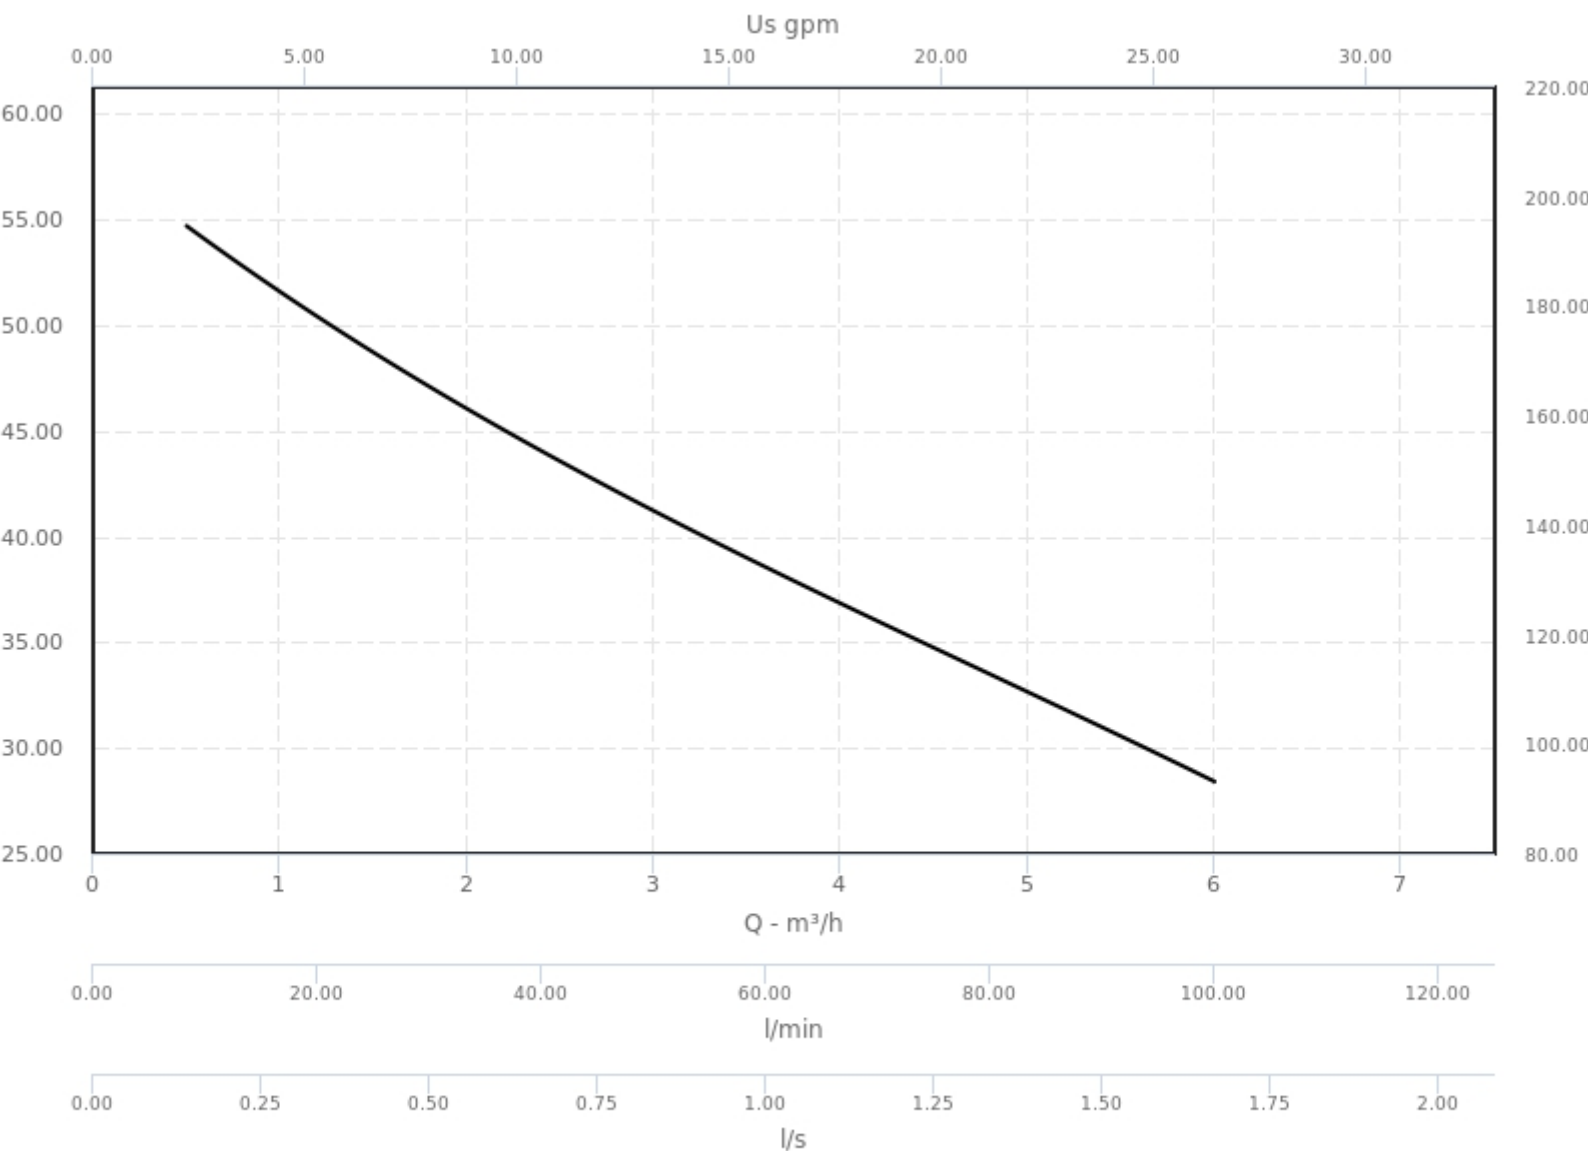
FICHA DE BOMBA Y MOTOR

n (rpm):	2800	Un (V):	230
Max presión de trabajo (bar):	8	f_q (Hz):	50
H max (m):	54.70	Polos:	2
H min (m):	28.50	I_n (A):	9.2
Q min (mc/h):	0.50	cosφ:	0.97
Q max (mc/h):	6.00	C (mF):	35
P_n (kW):	1.50	V_c (V):	450
P_n (HP):	2.00	Max temperatura de líquido (°C):	35
Fases de motor:	1~	Peso (kg):	18.200

MATERIALES

Cuerpo bomba:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Difusor:	Noryl PPO-GF20
Tapa del cuerpo:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Inyector:	Noryl PPO-GF20
Rodete:	Brass P-Cu Zn 40 Pb 2 UNI 5705	Eje:	Cr-Ni steel 1.4305 EN 10088 (AISI 303)
Anillo cierre:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Sello mecánico:	Carbon-Ceramic-NBR

Ficha Técnica: 25/06/2020

72B50044100: NGXM 6/18

Ficha Técnica: 25/06/2020

72B50044100: NGXM 6/18

DIMENSIONES (MM)

a: 140.00 mm
m1: 37.50 mm
m3: 9.50 mm
n1: 185.00 mm
n2: 155.00 mm
b: 33.00 mm
s: 9.5
g1: 11.00 mm
h1: 152.00 mm
h2: 68.00 mm
w: 113.00 mm
w1: 157.50 mm
fM: 488.50 mm

NGX 5, 6

