

Ficha Técnica: 25/06/2020

72A50044200: NGX 6/18/A

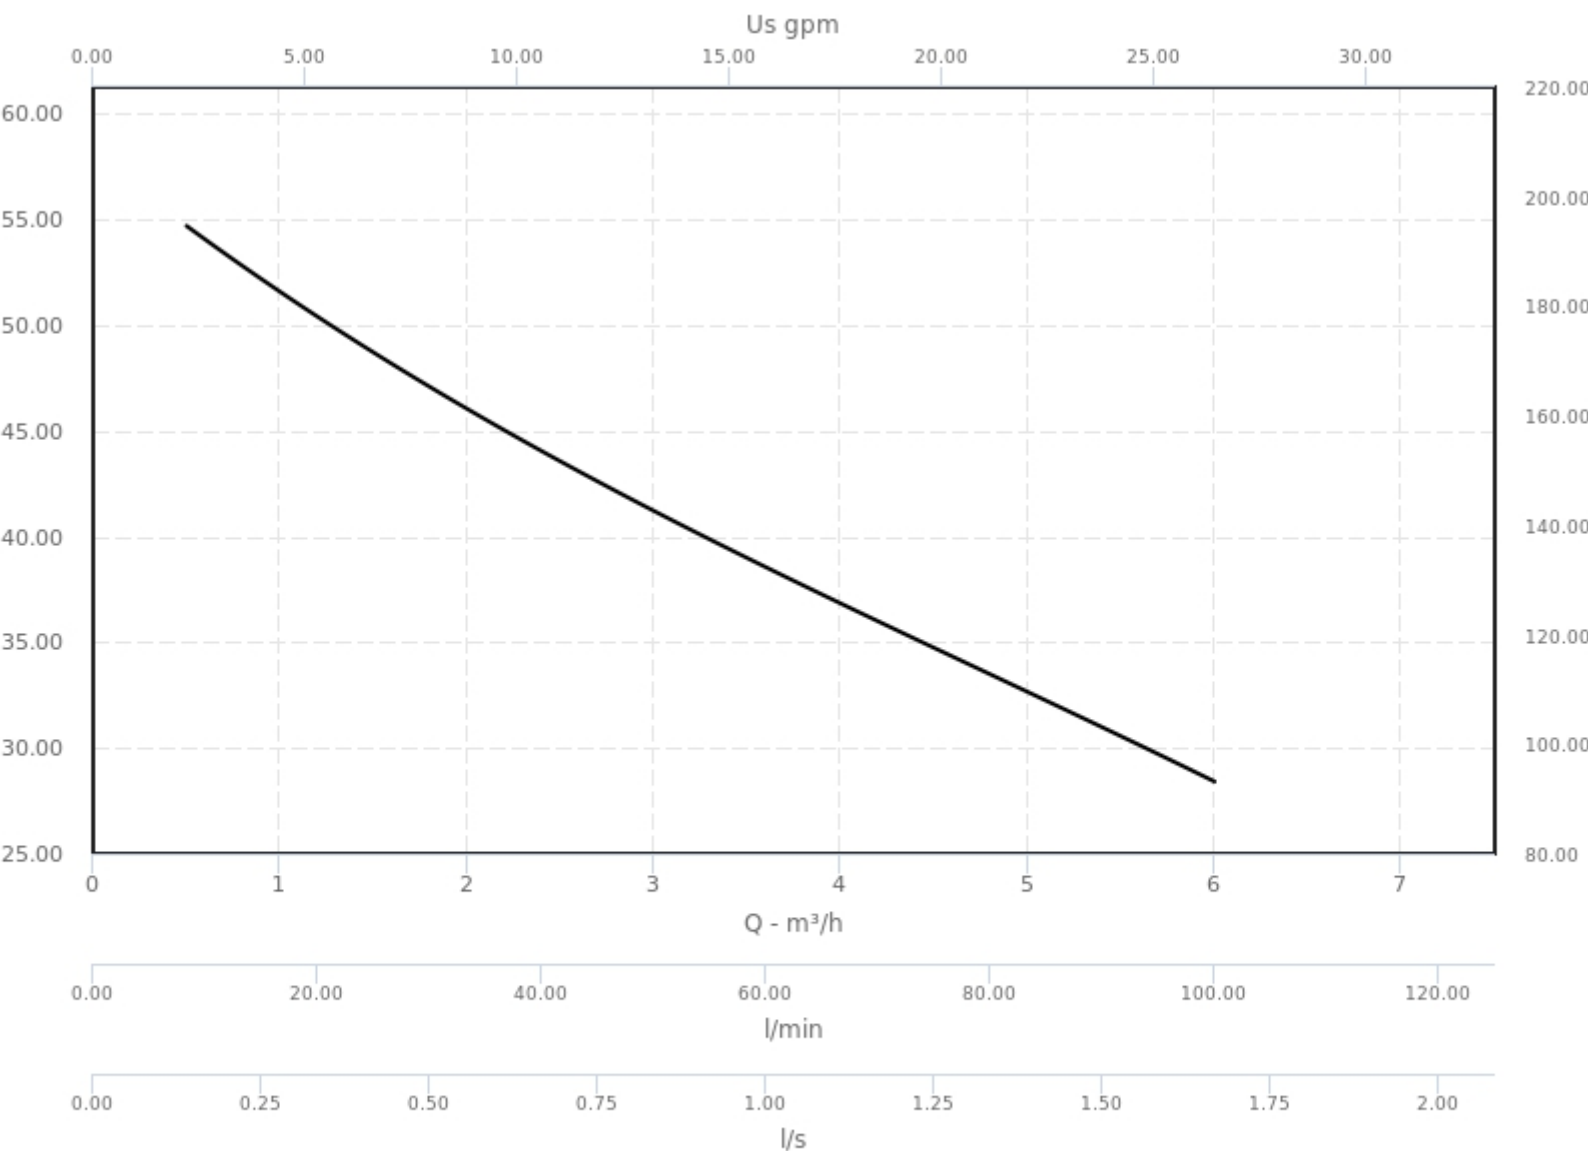
FICHA DE BOMBA Y MOTOR

n (rpm):	2900	Diámetro de rodetes (mm):	150.00
Max presión de trabajo (bar):	8	Fases de motor:	3~
H max (m):	54.70	Un (V):	230/400
H min (m):	28.50	fq (Hz):	50
Q min (mc/h):	0.50	Polos:	2
Q max (mc/h):	6.00	In (A):	7.5 / 4.3
Pn (kW):	1.50	cosf:	0.81
Pn (HP):	2.00	Peso (kg):	18.900

MATERIALES

Cuerpo bomba:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Difusor:	Noryl PPO-GF20
Tapa del cuerpo:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	 inyector:	Noryl PPO-GF20
Rodete:	Brass P-Cu Zn 40 Pb 2 UNI 5705	Eje:	Cr-Ni steel 1.4305 EN 10088 (AISI 303)
Anillo cierre:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Sello mecánico:	Carbon-Ceramic-NBR

Ficha Técnica: 25/06/2020

72A50044200: NGX 6/18/A

Ficha Técnica: 25/06/2020

72A50044200: NGX 6/18/A

DIMENSIONES (MM)

NGX 5, 6

a: 140.00 mm
m1: 37.50 mm
m3: 9.50 mm
n1: 185.00 mm
n2: 155.00 mm
b: 33.00 mm
s: 9.5
g1: 11.00 mm
h1: 152.00 mm
h2: 68.00 mm
w: 113.00 mm
w1: 157.50 mm
fM: 488.50 mm

