

Ficha Técnica: 25/06/2020

72U70100000: GXRM 11

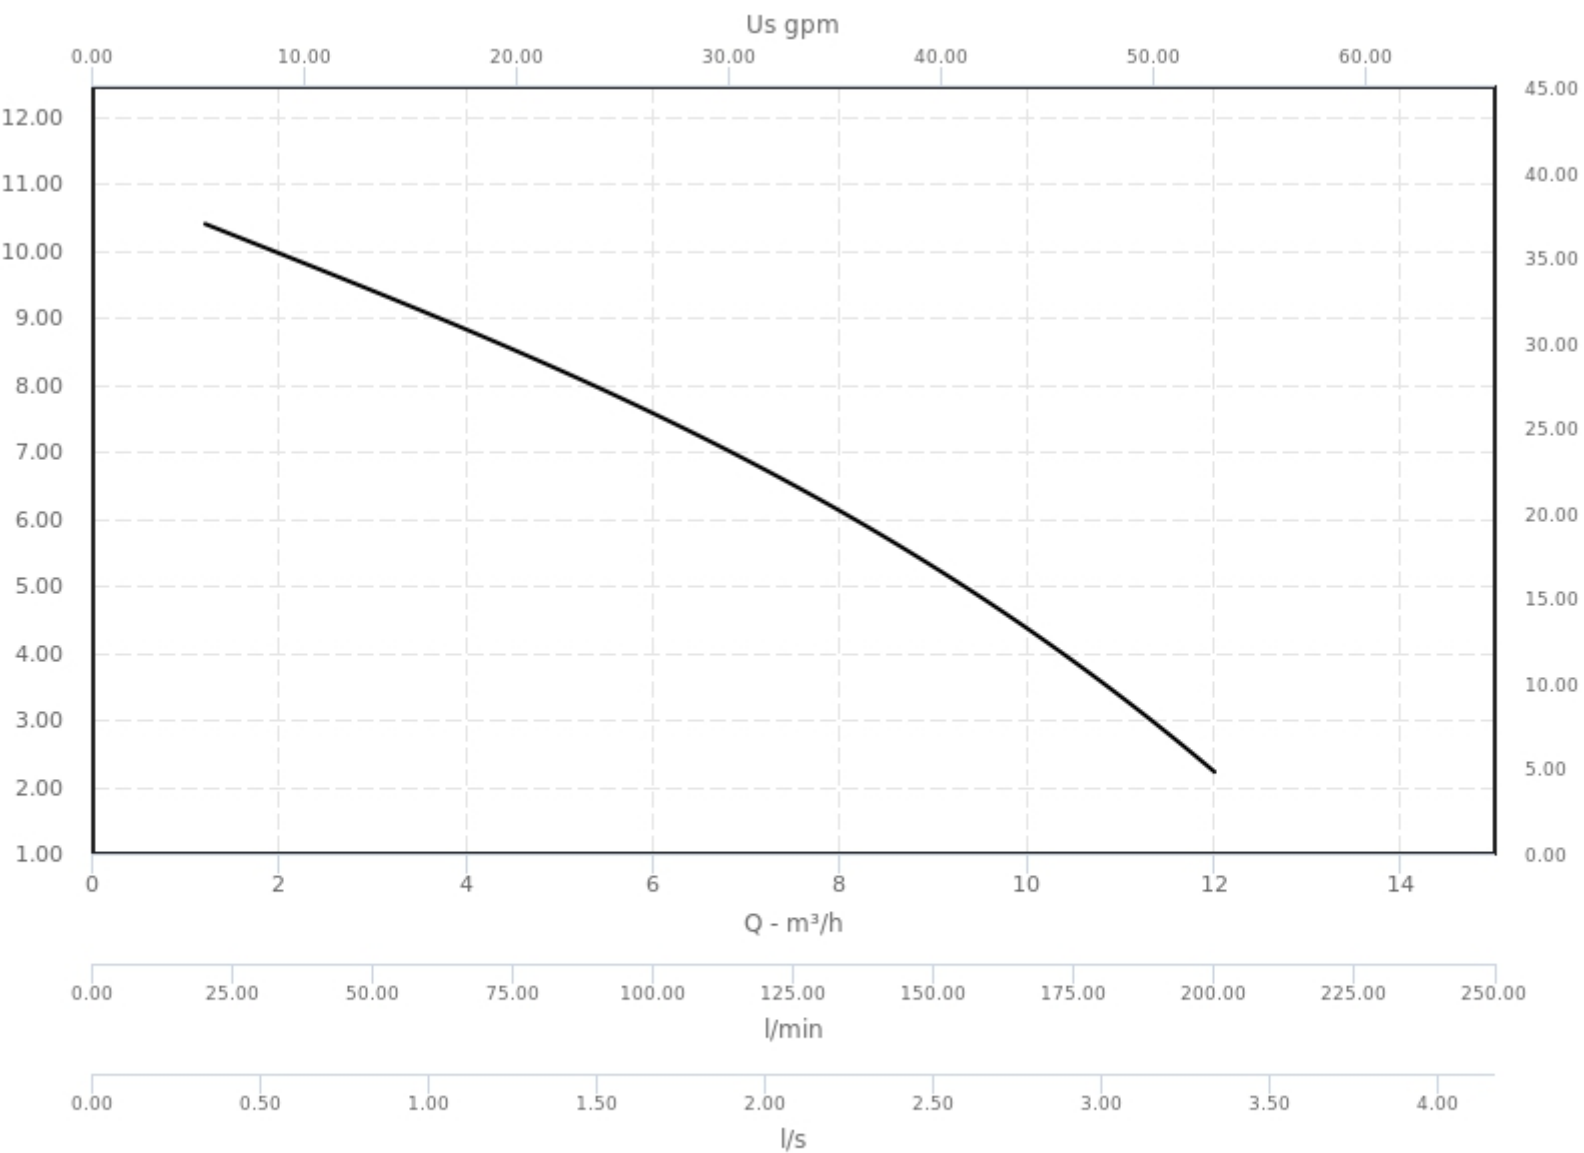
FICHA DE BOMBA Y MOTOR

n (rpm):	2900	Un (V):	230
H max (m):	10.40	f_q (Hz):	50
H min (m):	2.20	Polos:	2
Q min (mc/h):	1.20	I_n (A):	3.5
Q max (mc/h):	12.00	cosφ:	0.9
P_n (kW):	0.37	C (mF):	12.5
P_n (HP):	0.50	V_c (V):	450
Fases de motor:	1~	Peso (kg):	6.500

MATERIALES

Camisa de bomba:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Eje:	Cr-Ni steel 1.4305 EN 10088 (AISI 303)
Asa:	Polypropylene	Sello mecánico:	Ceramic Alumina-Carbon-NBR
Cuerpo bomba:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Filtro:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)
Rodete:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)	Sello lubricado en aceite:	Oil for food-Pharmaceutical machinery
Camisa del motor:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)		

Ficha Técnica: 25/06/2020

72U70100000: GXRM 11

Ficha Técnica: 25/06/2020

72U70100000: GXRM 11

DIMENSIONES (MM)

dn2: G 1 1/4
a: 265.00 mm
fM: 300.00 mm
I3: 56.00 mm
I5: 176
ps: 10
Lmin: 70.00 mm
Lmax: 340.00 mm

