

Ficha Técnica: 25/06/2020

70U41150000: GQGM 6-25

FICHA DE BOMBA Y MOTOR


n (rpm):	2900	f_q (Hz):	50
H max (m):	23.00	Polos:	2
H min (m):	4.00	I_n (A):	9.5
Q min (mc/h):	3.00	cosφ:	0.95
Q max (mc/h):	16.80	C (mF):	30+80
P_n (kW):	1.50	V_c (V):	450
P_n (HP):	2.00	Max temperatura de líquido (°C):	35
Diámetro de rodetes (mm):	143.50	P₁ (kW):	2.00 kW
Fases de motor:	1~	Peso (kg):	22.000
U_n (V):	230		

MATERIALES

Asa:	Polypropylene (with frame in AISI 304)	Eje:	Cr-Ni steel 1.4305 EN 10088 (AISI 303)
Cuerpo bomba:	Cast iron GJL 200 EN 1561	Sello mecánico superior:	Ceramic Alumina-Carbon-NBR
Tapa del cuerpo:	Cast iron GJL 200 EN 1561	Sello mecánico inferior:	Ceramic Alumina-Carbon-NBR
Rodete:	Cast iron GJL 200 EN 1561	Sello lubricado en aceite:	Oil for food-Pharmaceutical machinery
Camisa del motor:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)		

Ficha Técnica: 25/06/2020

70U41150000: GQGM 6-25

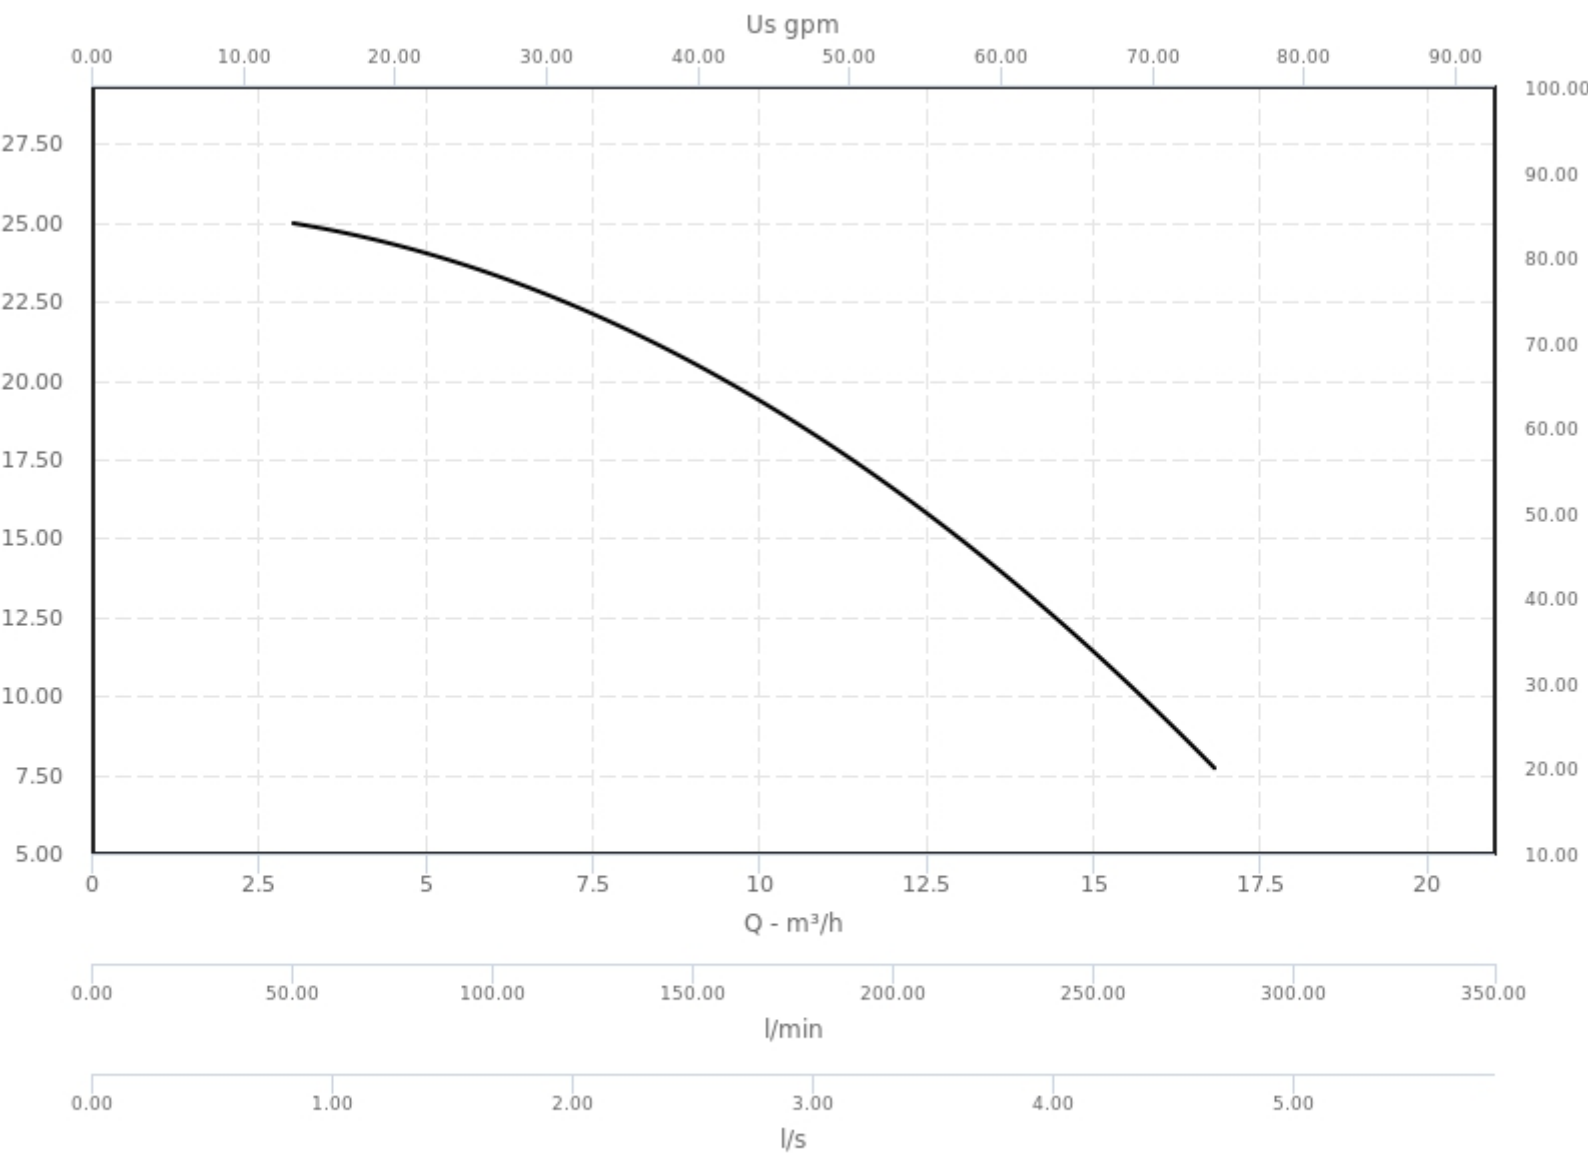

Ficha Técnica: 25/06/2020

70U41150000: GQGM 6-25

DIMENSIONES (MM)

dn2: G1 1/2 (DN32)

a1: 65.00 mm

fM: 485.00 mm

s: 16

l1: 91.00 mm

l2: 99.00 mm

l5: 255

h2: 160.00 mm

de: 120

dk: 90

Lmin: 300.00 mm

Lmax: 560.00 mm

