

Ficha Técnica: 25/06/2020

70T41160000: GQG 6-25

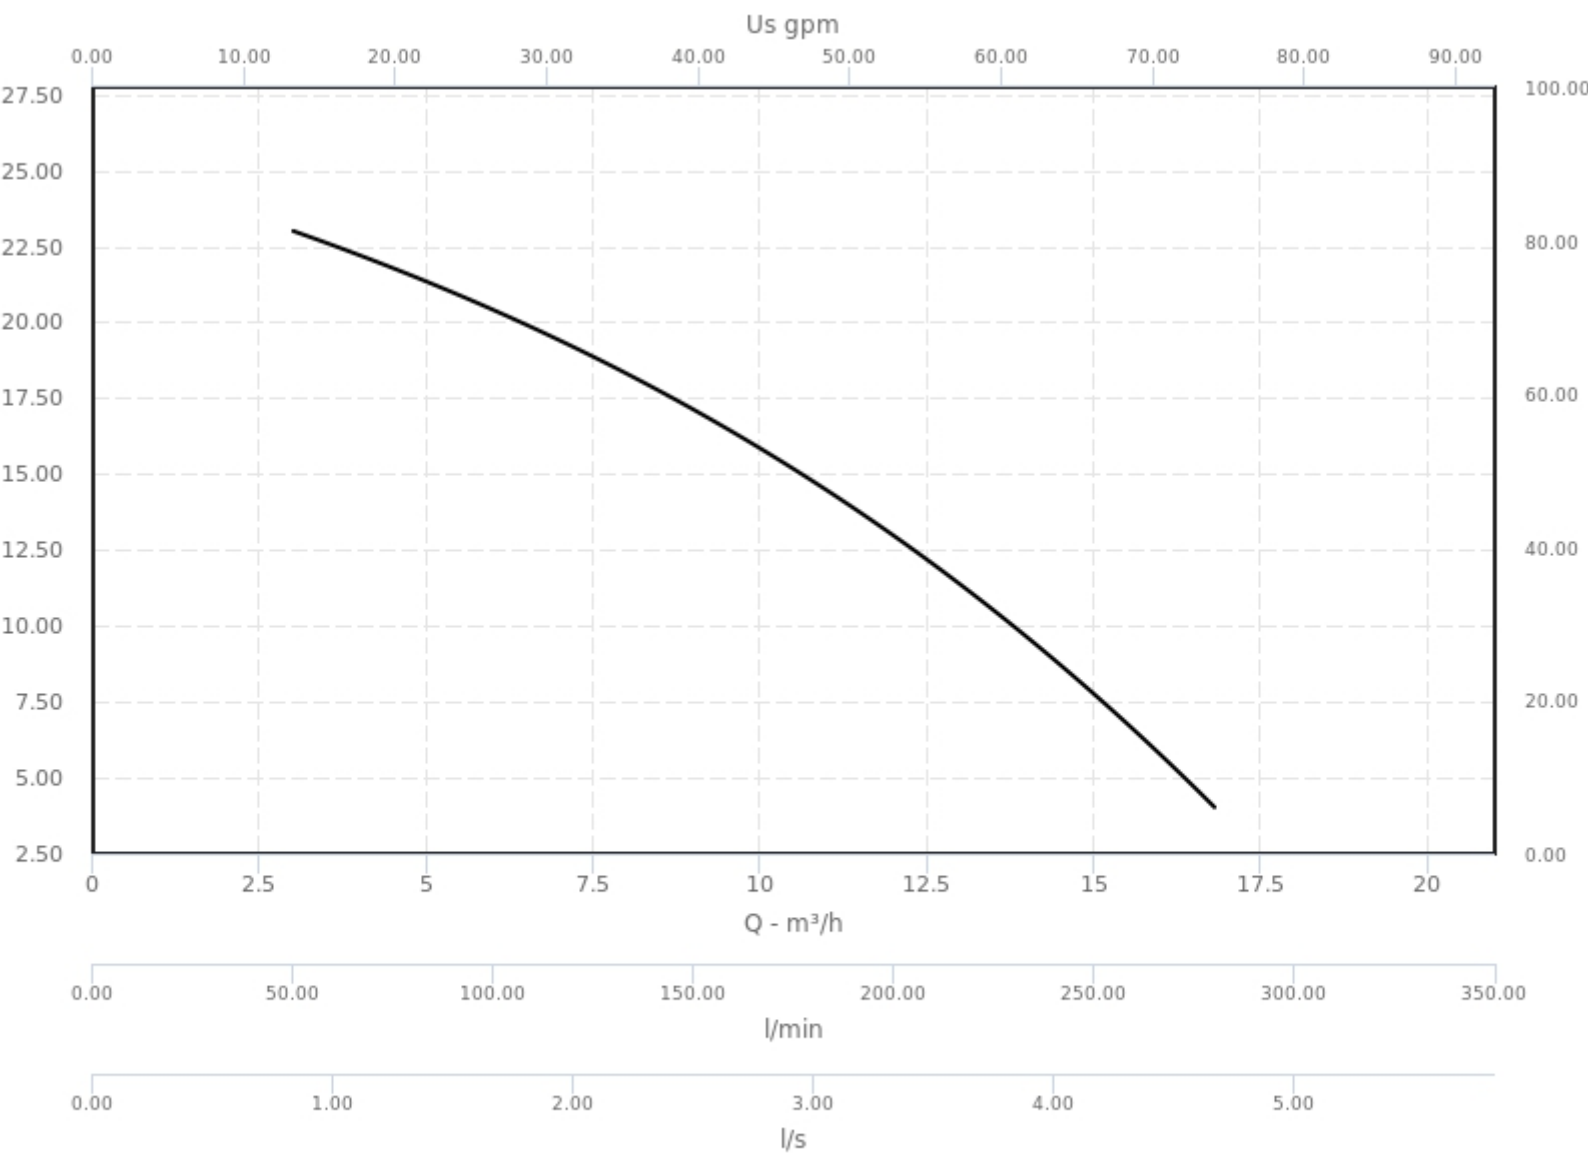
FICHA DE BOMBA Y MOTOR

n (rpm):	2900	Un (V):	400
H max (m):	23.00	fq (Hz):	50
H min (m):	4.00	Polos:	2
Q min (mc/h):	3.00	In (A):	3.8
Q max (mc/h):	16.80	cosf:	0.83
Pn (kW):	1.50	Max temperatura de liquido (°C):	35
Pn (HP):	2.00	P1 (kW):	2.00 kW
Diámetro de rodetes (mm):	143.50	Peso (kg):	18.700
Fases de motor:	3~		

MATERIALES

Asa:	Polypropylene (with frame in AISI 304)	Eje:	Cr-Ni steel 1.4305 EN 10088 (AISI 303)
Cuerpo bomba:	Cast iron GJL 200 EN 1561	Sello mecánico superior:	Ceramic Alumina-Carbon-NBR
Tapa del cuerpo:	Cast iron GJL 200 EN 1561	Sello mecánico inferior:	Ceramic Alumina-Carbon-NBR
Rodete:	Cast iron GJL 200 EN 1561	Sello lubricado en aceite:	Oil for food-Pharmaceutical machinery
Camisa del motor:	Cr-Ni steel 1.4301 EN 10088 (AISI 304)		

Ficha Técnica: 25/06/2020

70T41160000: GQG 6-25

Ficha Técnica: 25/06/2020

70T41160000: GQG 6-25

DIMENSIONES (MM)

dn2: G1 1/2 (DN32)

a1: 65.00 mm

fM: 485.00 mm

s: 16

l1: 91.00 mm

l2: 99.00 mm

l5: 255

h2: 160.00 mm

de: 120

dk: 90

