



SP 4",6",8",10" series

Stainless Steel Submersible Pumps

50Hz



STAIRS INDUSTRIAL CO., LTD.

6" Stainless Steel Submersible Pumps

Stairs' SP 6" range of submersible pumps are made of corrosion and abrasion resistant stainless steel and have been developed in accordance with state of the art technology. The SP 6" pumps are manufactured to the highest standards of highly efficient hydraulic impeller and diffuser design to reach high energy efficiency, dependable performance, rugged construction and long service life, even in difficult environments.

Applications

- ◆ Potable water supply
- ◆ Agricultural irrigation and livestock watering
- ◆ Municipal and industrial water supply
- ◆ Pressure boosting
- ◆ Mining applications
- ◆ Groundwater lowering
- ◆ Fountain

Pumped Liquids



- ◆ Clean, thin, non-aggressive and non-corrosive liquids without solid particles or fibers.

Operating Conditions

- ◆ Capacity (m³/h) min 3 max 78
- ◆ Total Head: Max. 648 m
- ◆ Max. ambient temperature (Liquid): 40°C
- ◆ Sand content: Max. 50 g/m³
- ◆ Screen size of each hole: 20 x 4 mm



Model code

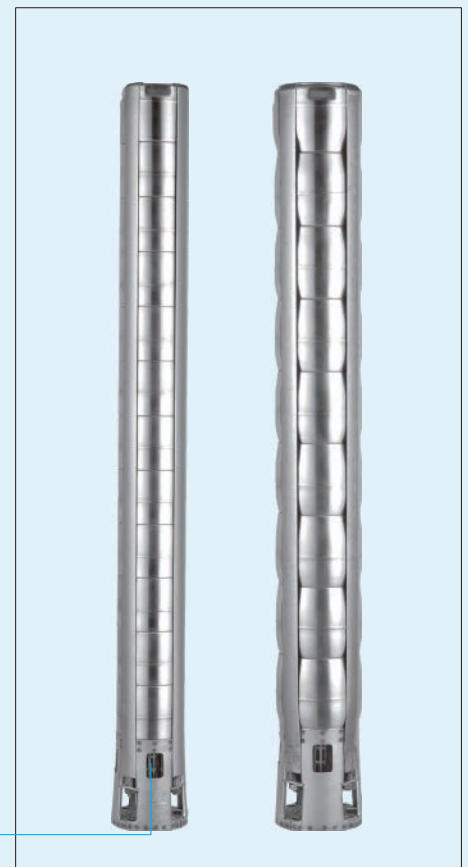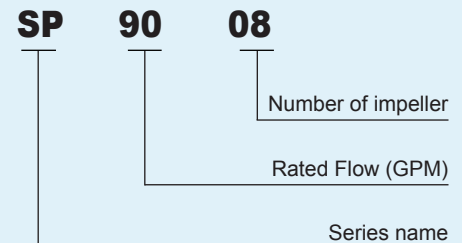





Features

- ◆ Stainless steel construction designed and built for years of trouble free operation
- ◆ Designed and built to operate in difficult conditions.
- ◆ All metal parts are made of 304 or 316 stainless steel, except for the shafts, which are made of 431 or 316 stainless steel.
- ◆ Heavy duty stainless steel discharge head with built-in check valve for preventing back flow in connection with pump stoppage and the risk of destructive water hammer is reduced to a minimum.
- ◆ NEMA standard of bracket mounting.
- ◆ High quality shaft bearings provide low friction and high wear resistance.
- ◆ The stop ring prevents damage to the pump during transport and in case of up-thrust in connection with start-up. The stop ring, which is designed as a thrust bearing, limits axial movements of the pump shaft.
- ◆ Stainless steel strainer to restrict the entry of sand and other extraneous material.

Stairs SP Series

SP 6"

SP90 Performance Curves

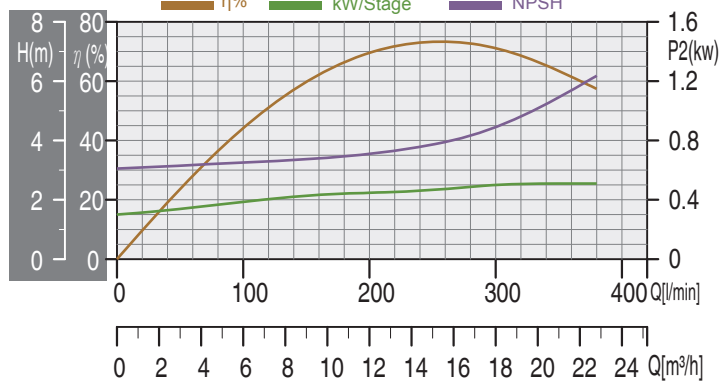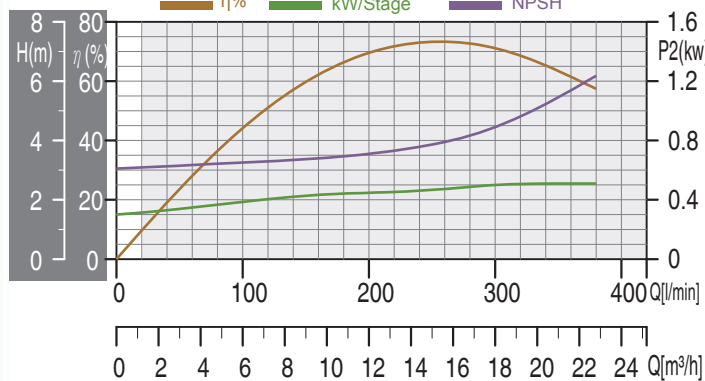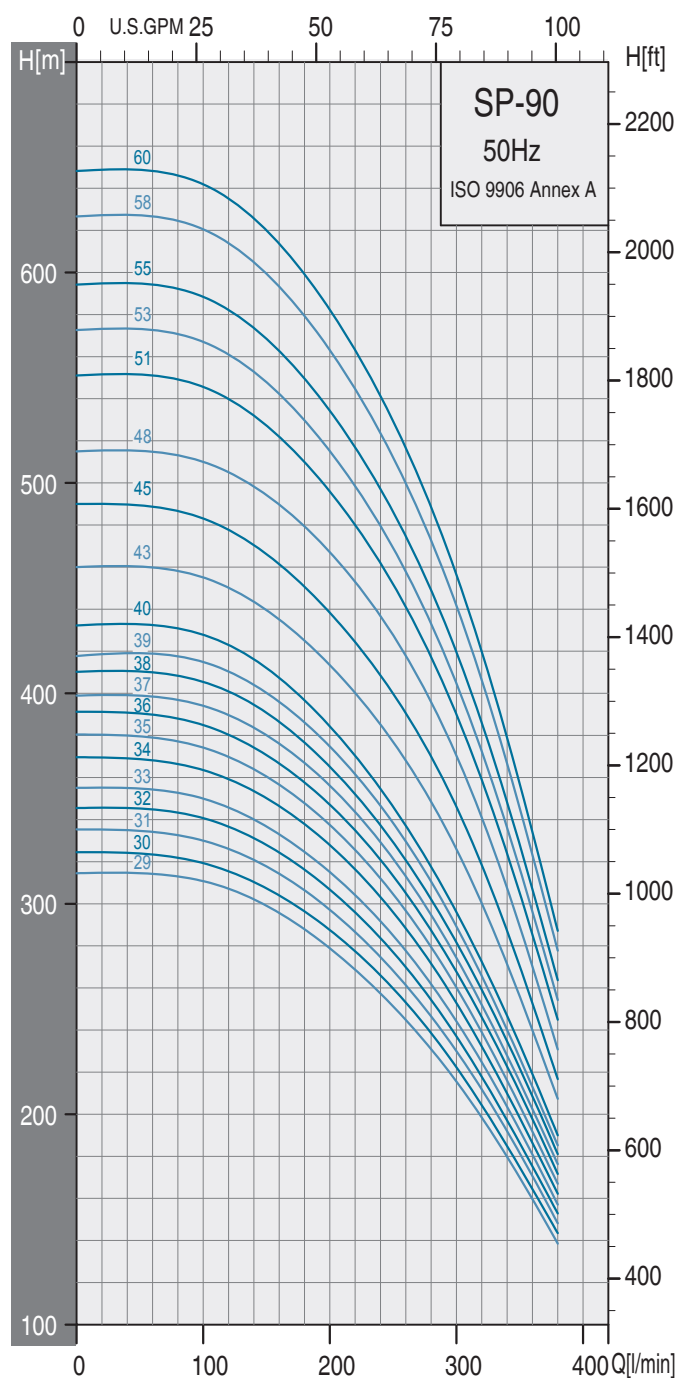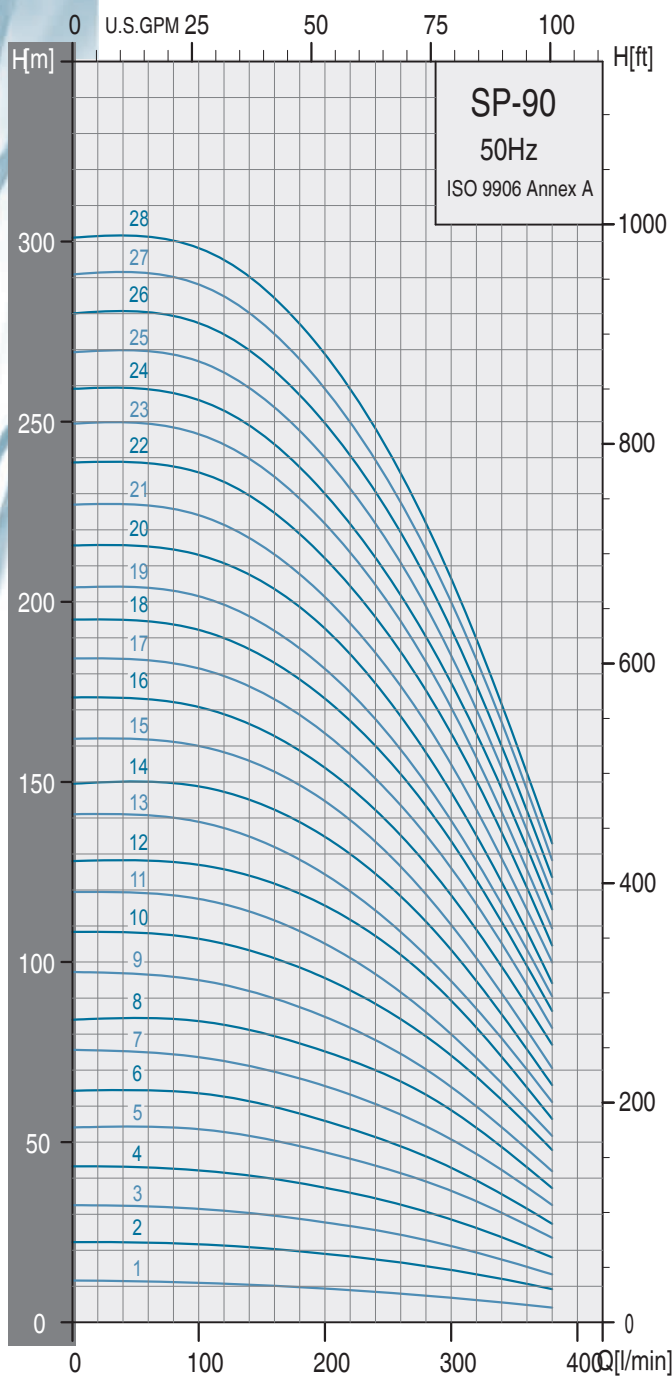

Selection Chart

50Hz

Dimensions and weights

Pump Type	Motor		Q capacity 2850 rpm								
	P2		m³/h l/min	3	6	9	12	15	18	21	23
	KW	HP		50	100	150	200	250	300	350	383
SP 90-1	0.55	0.75	HEAD IN METERS	12	11	11	10	8	7	6	4
SP 90-2	1.1	1.5		22	22	20	19	18	14	12	9
SP 90-3	2.2	3		32	32	30	28	25	21	17	13
SP 90-4	2.2	3		43	42	40	38	33	29	23	18
SP 90-5	3	4		53	52	51	48	43	37	29	22
SP 90-6	3.7	5		64	63	60	56	50	43	34	27
SP 90-7	4	5.5		75	74	70	66	59	51	40	32
SP 90-8	5.5	7.5		85	84	80	75	68	59	46	37
SP 90-9	5.5	7.5		97	95	91	85	77	65	51	42
SP 90-10	5.5	7.5		108	107	102	95	86	74	58	48
SP 90-11	7.5	10		119	118	113	105	94	80	63	52
SP 90-12	7.5	10		128	127	123	116	105	89	69	57
SP 90-13	7.5	10		141	139	133	124	112	95	75	60
SP 90-14	9.3	12.5		150	149	144	135	122	103	81	66
SP 90-15	9.3	12.5		162	160	155	145	130	110	86	71
SP 90-16	9.3	12.5		173	171	165	154	139	119	93	77
SP 90-17	9.3	12.5		184	182	175	163	147	126	100	80
SP 90-18	9.3	12.5		195	192	185	173	156	134	105	86
SP 90-19	11	15		204	202	194	181	163	139	110	91
SP 90-20	11	15		216	213	206	192	173	147	116	95
SP 90-21	11	15		227	224	216	201	182	155	122	100
SP 90-22	13	17.5		239	237	228	212	190	163	129	105
SP 90-23	13	17.5		250	247	237	222	200	171	134	109
SP 90-24	13	17.5		260	257	247	230	208	178	140	115
SP 90-25	15	20		270	261	257	240	217	185	145	119
SP 90-26	15	20		281	278	267	250	225	192	151	124
SP 90-27	15	20		291	288	277	259	234	200	158	128
SP 90-28	18.5	25		302	298	288	269	242	207	162	133
SP 90-29	18.5	25		314	311	300	279	250	215	170	138
SP 90-30	18.5	25		324	319	307	288	260	222	175	144
SP 90-31	18.5	25		335	330	318	298	269	230	181	148
SP 90-32	18.5	25		345	341	328	307	277	237	187	153
SP 90-33	18.5	25		355	350	337	315	285	243	191	157
SP 90-34	18.5	25		369	364	350	328	296	253	199	162
SP 90-35	22	30		379	374	361	338	305	260	204	167
SP 90-36	22	30		390	385	371	348	313	268	210	170
SP 90-37	22	30		399	394	380	356	322	274	203	176
SP 90-38	22	30		410	405	390	365	330	281	222	180
SP 90-39	22	30		419	415	400	375	364	289	227	185
SP 90-40	22	30		433	428	412	384	346	296	235	190
SP 90-43	26	35		460	455	440	414	377	326	257	207
SP 90-45	26	35		489	483	466	438	400	346	271	217
SP 90-48	26	35		515	510	494	467	428	371	290	231
SP 90-51	30	40		551	546	527	496	452	390	301	245
SP 90-53	30	40		573	567	548	515	469	405	317	254
SP 90-55	37	50		595	589	569	534	486	420	329	264
SP 90-58	37	50		627	621	600	563	512	442	346	278
SP 90-60	37	50		649	642	620	582	529	457	357	287

*Higher pressure , longer stages pumps up to 60 stages are available on request.

▶ With Sleeve .


Pump Type	Motor Dia.	Dimensions (mm)			Net Weight (Kg)
		A	C*	C**	
SP 90-1	4"	343	131		5.0
SP 90-2	4"	403	131		6.4
SP 90-3	4"	464	131		7.9
SP 90-4	4"	524	131		9.3
SP 90-5	4"	585	131		10.8
SP 90-6	4"	645	131		12.2
SP 90-7	4"	706	131		13.7
SP 90-8	4"	766	131		15.1
SP 90-9	4"	827	131		16.6
SP 90-10	4"	887	131		18.0
SP 90-11	6"	948	142	142	19.5
SP 90-12	6"	1008	142	142	20.9
SP 90-13	6"	1069	142	142	22.4
SP 90-14	6"	1129	142	142	23.9
SP 90-15	6"	1190	142	142	25.3
SP 90-16	6"	1250	142	142	26.8
SP 90-17	6"	1311	142	142	28.2
SP 90-18	6"	1371	142	142	29.7
SP 90-19	6"	1432	142	142	31.1
SP 90-20	6"	1492	142	142	32.5
SP 90-21	6"	1553	142	142	34.0
SP 90-22	6"	1613	142	142	35.4
SP 90-23	6"	1674	142	142	36.9
SP 90-24	6"	1734	142	142	38.3
SP 90-25	6"	1795	142	142	39.8
SP 90-26	6"	1855	142	142	41.2
SP 90-27	6"	1916	142	142	42.7
SP 90-28	6"	1976	142	142	44.2
SP 90-29	6"	2037	142	142	45.6
SP 90-30	6"	2097	142	142	47.1
SP 90-31	6"	2158	142	142	48.5
SP 90-32	6"	2218	142	142	50.0
SP 90-33	6"	2279	142	142	51.4
SP 90-34	6"	2339	142	142	52.9
SP 90-35	6"	2400	142	142	54.3
SP 90-36	6"	2460	142	142	55.7
SP 90-37	6"	2521	142	142	57.2
SP 90-38	6"	2581	142	142	58.6
SP 90-39	6"	2642	142	142	60.1
SP 90-40	6"	2702	142	142	61.5
▶ SP 90-43	6"	3255	178	181	121.7
▶ SP 90-45	6"	3376	178	181	126.1
▶ SP 90-48	6"	3558	178	181	132.6
▶ SP 90-51	6"	3739	178	181	139.1
▶ SP 90-53	6"	3860	178	181	143.4
▶ SP 90-55	6"	3981	178	181	147.8
▶ SP 90-58	6"	4163	178	181	154.3
▶ SP 90-60	6"	4284	178	181	158.6

C*: Maximum diameter of pump with one motor cable

C**: Maximum diameter of pump with two motor cable

SP-9043 to SP-9060 are mounted in sleeve for R 3 connection

▶ With Sleeve .




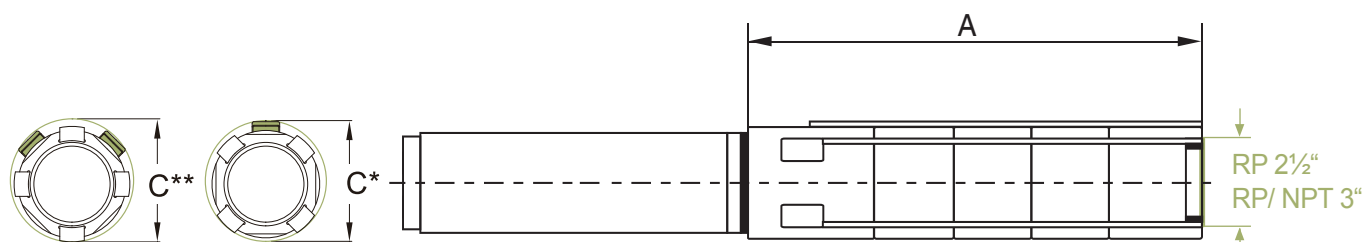


Stairs SP Series

SP 6"

SP150

Performance Curves

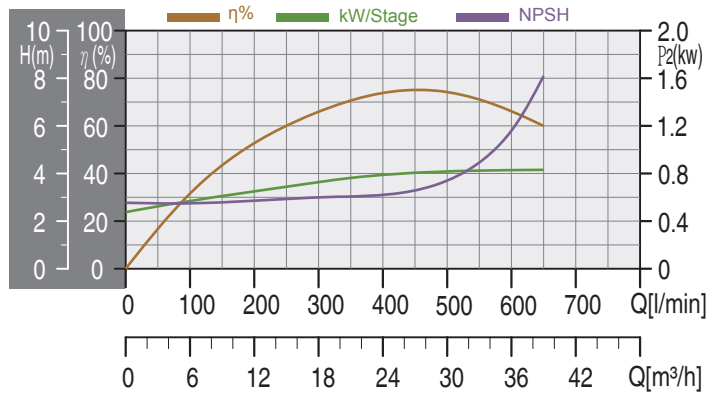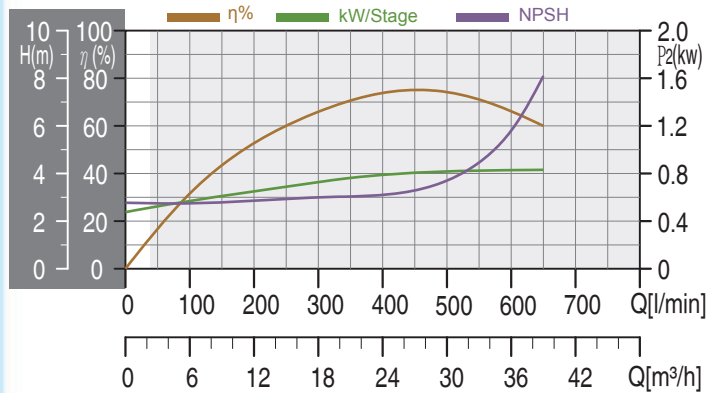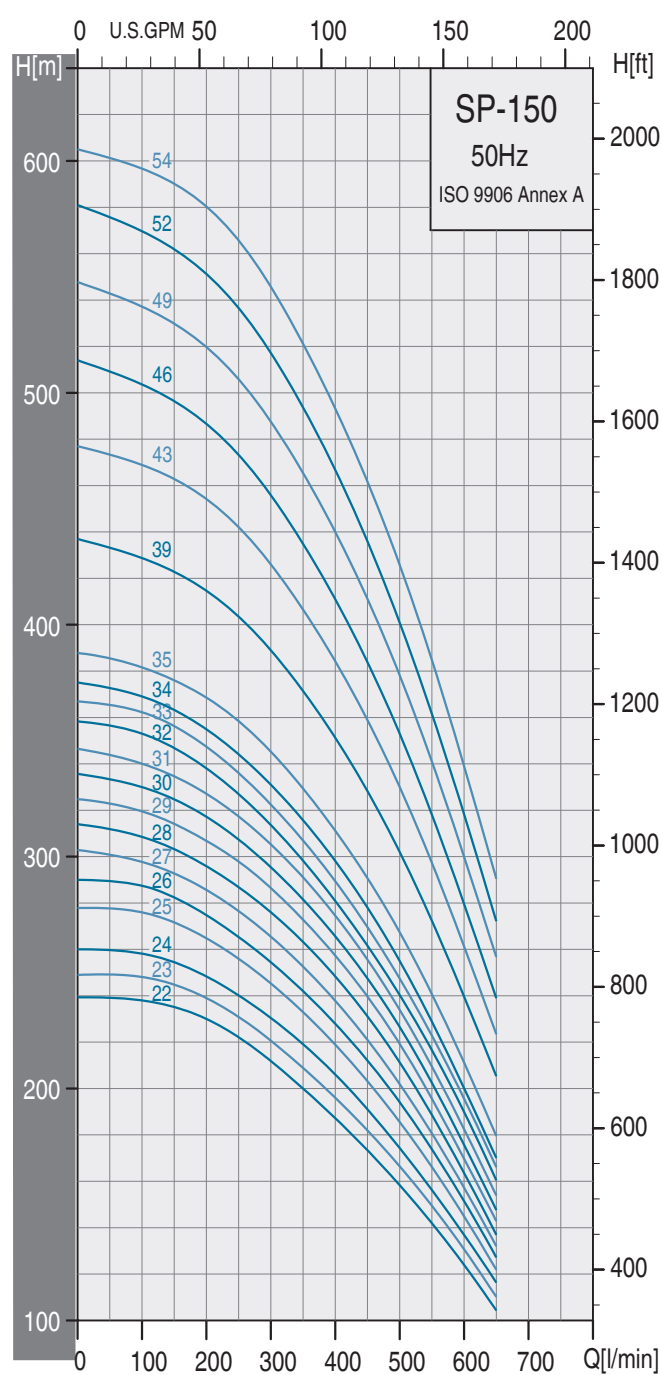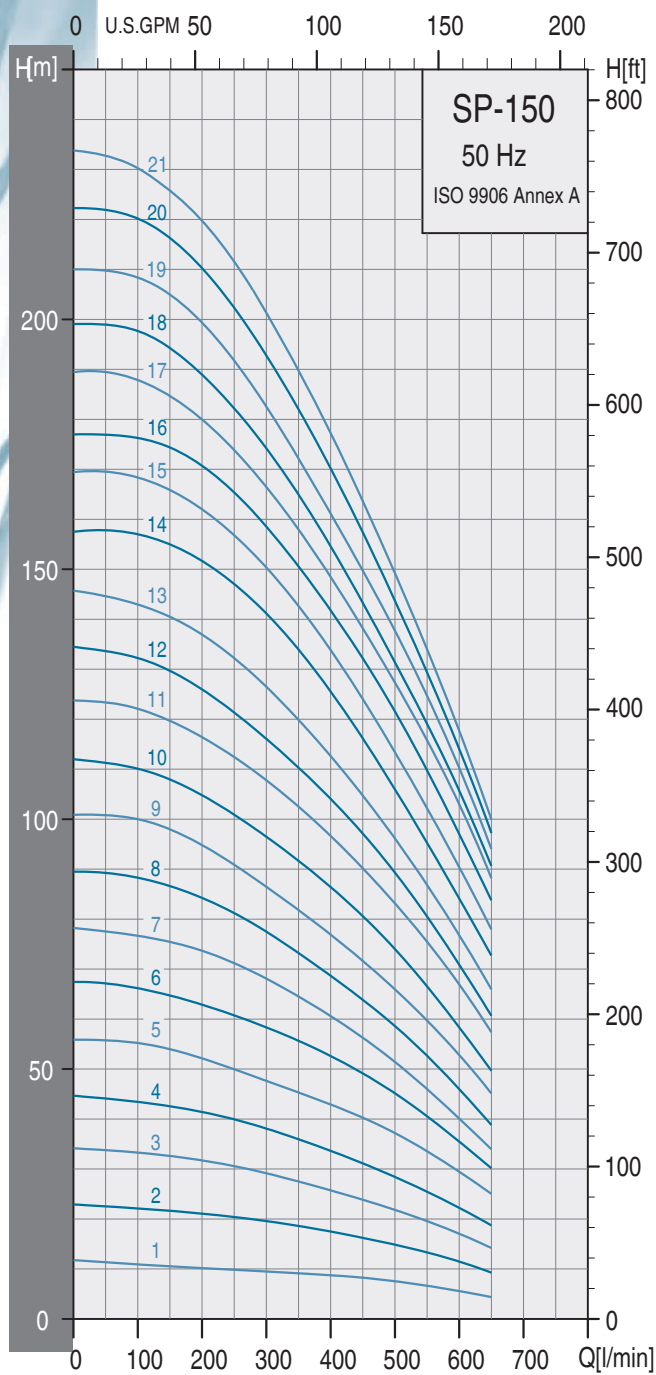

Selection Chart

50Hz

Dimensions and weights

Pump Type	Motor		Q capacity 2850 rpm												
	P2		m³/h l/min	6	9	12	15	18	21	24	27	30	33	36	39
	KW	HP		100	150	200	250	300	350	400	450	500	550	600	650
SP 150-1	1.1	1.5	HEAD IN METERS	11	11	10	10	10	9	9	8	8	7	6	5
SP 150-2	2.2	3		23	22	21	20	19	18	17	16	15	13	11	9
SP 150-3	3	4		33	32	31	30	29	28	26	24	22	20	17	14
SP 150-4	3.7	5		43	42	41	40	38	36	34	31	28	26	23	19
SP 150-5	5.5	7.5		55	54	52	50	48	45	43	40	37	34	29	25
SP 150-6	5.5	7.5		67	64	42	60	58	56	52	49	45	40	36	30
SP 150-7	7.5	10		77	76	74	71	68	65	61	56	52	46	40	34
SP 150-8	7.5	10		88	87	84	81	78	73	68	64	58	53	46	38
SP 150-9	9.3	12.5		100	98	95	91	87	82	77	72	66	60	53	45
SP 150-10	9.3	12.5		110	108	105	101	97	92	86	81	74	67	58	50
SP 150-11	11	15		122	120	117	112	108	102	97	90	83	76	67	57
SP 150-12	11	15		132	130	126	121	116	110	104	97	89	81	71	61
SP 150-13	11	15		143	140	137	132	127	120	113	105	97	87	77	66
SP 150-14	13	17.5		157	155	152	147	141	134	126	116	108	95	84	73
SP 150-15	15	20		168	166	162	157	150	142	134	124	113	102	90	77
SP 150-16	15	20		176	174	171	165	159	151	142	132	122	110	97	84
SP 150-17	15	20		188	185	180	173	167	158	148	138	127	116	103	88
SP 150-18	18.5	25		198	194	189	182	174	165	155	143	130	119	106	90
SP 150-19	18.5	25		208	205	199	192	182	172	161	150	137	125	110	94
SP 150-20	18.5	25		220	216	210	202	193	182	170	157	144	129	114	97
SP 150-21	18.5	25		230	226	220	212	202	190	177	164	149	134	117	100
SP 150-22	22	30		238	235	230	222	212	200	187	173	159	142	124	104
SP 150-23	22	30		248	245	239	231	221	209	196	182	167	150	131	110
SP 150-24	22	30		258	254	248	240	230	219	207	191	175	156	137	117
SP 150-25	22	30		276	272	265	256	245	233	219	203	187	166	145	122
SP 150-26	22	30		287	282	275	266	255	242	227	212	194	173	152	127
SP 150-27	26	35		298	293	286	277	265	253	238	221	202	181	157	132
SP 150-28	26	35		309	303	296	287	276	263	248	231	212	189	164	137
SP 150-29	26	35		319	314	307	298	287	273	257	240	220	196	170	143
SP 150-30	26	35		330	325	317	307	295	282	266	248	227	202	176	148
SP 150-31	26	35		340	335	327	317	305	291	275	256	234	209	183	154
SP 150-32	30	40		353	347	338	327	313	298	281	261	240	217	190	160
SP 150-33	30	40		362	356	347	336	322	307	289	270	248	223	196	166
SP 150-34	30	40		369	363	355	344	331	316	298	278	255	229	200	170
SP 150-35	30	40	382	377	368	358	346	329	311	290	267	240	211	180	
SP 150-39	37	50	429	423	415	404	389	371	351	328	302	272	240	205	
SP 150-43	37	50	469	463	454	442	426	407	384	359	330	297	261	223	
SP 150-46	45	60	503	496	487	473	456	435	411	384	353	318	280	239	
SP 150-49	45	60	537	530	520	506	488	465	440	411	378	341	300	257	
SP 150-52	55	75	569	562	551	537	517	494	467	436	401	362	318	272	
SP 150-54	55	75	596	590	580	566	546	521	493	462	428	385	339	290	

Pump Type	Motor Dia.	Dimensions (mm)			Net Weight (Kg)
		A	C*	C**	
SP 150-1	4"	366	131		6.7
SP 150-2	4"	462	131		8.4
SP 150-3	4"	558	131		10.1
SP 150-4	4"	654	131		11.8
SP 150-5	4"	750	131		13.5
SP 150-6	4"	846	131		15.2
SP 150-7	6"	942	142	142	16.9
SP 150-8	6"	1038	142	142	18.6
SP 150-9	6"	1134	142	142	20.3
SP 150-10	6"	1230	142	142	22
SP 150-11	6"	1326	142	142	23.6
SP 150-12	6"	1422	142	142	25.3
SP 150-13	6"	1518	142	142	27
SP 150-14	6"	1614	142	142	29.7
SP 150-15	6"	1710	142	142	30.4
SP 150-16	6"	1806	142	142	32.1
SP 150-17	6"	1902	142	142	33.8
SP 150-18	6"	1998	142	142	35.5
SP 150-19	6"	2094	142	142	37.2
SP 150-20	6"	2190	142	142	38.9
SP 150-21	6"	2286	142	142	40.6
SP 150-22	6"	2382	142	142	42.3
SP 150-23	6"	2478	142	142	44
SP 150-24	6"	2574	142	142	45.6
SP 150-25	6"	2670	142	142	47.3
SP 150-26	6"	2766	142	142	49
SP 150-27	6"	2862	142	142	50.7
SP 150-28	6"	2958	142	142	52.4
SP 150-29	6"	3054	142	142	54.1
SP 150-30	6"	3150	142	142	55.8
SP 150-31	6"	3246	142	142	57.5
SP 150-32	6"	3342	142	142	59.2
SP 150-33	6"	3438	142	142	60.9
SP 150-34	6"	3534	142	142	62.6
SP 150-35	6"	3630	142	142	64.3
▶ SP 150-39	6"	4451	178	181	142
▶ SP 150-43	6"	4775	178	181	151.2
▶ SP 150-46	8"	5016	192	192	190.8
▶ SP 150-49	8"	5304	192	192	198.1
▶ SP 150-52	8"	5592	192	192	213.5
▶ SP 150-54	8"	5784	192	192	220

*Higher pressure , longer stages pumps up to 54 stages are available on request.


▶ With Sleeve .

C*: Maximum diameter of pump with one motor cable

C**: Maximum diameter of pump with two motor cable

SP-15039 to SP-15054 are mounted in sleeve for R 3 connection





▶ With Sleeve .

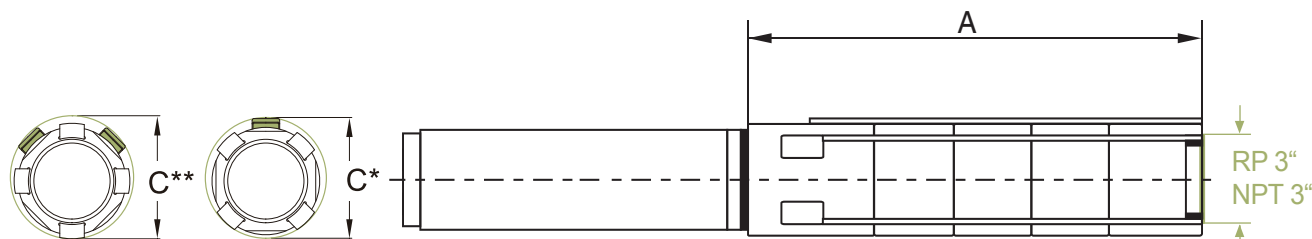

Stairs SP Series

SP 6"

SP230 Performance Curves

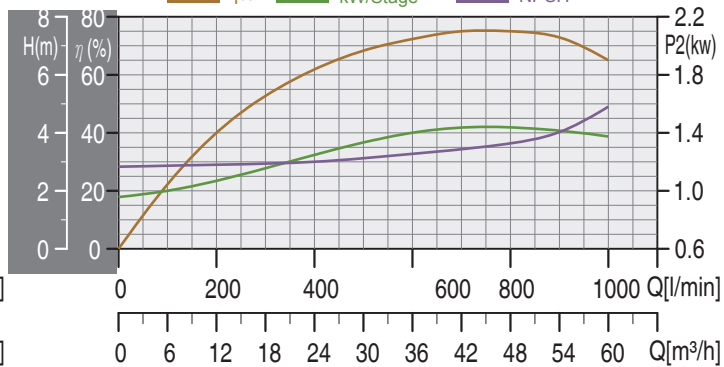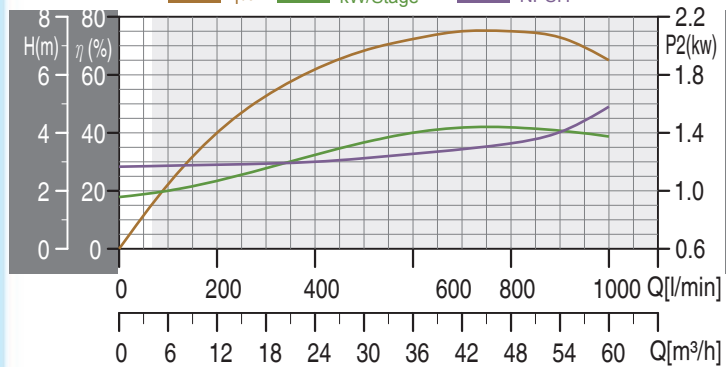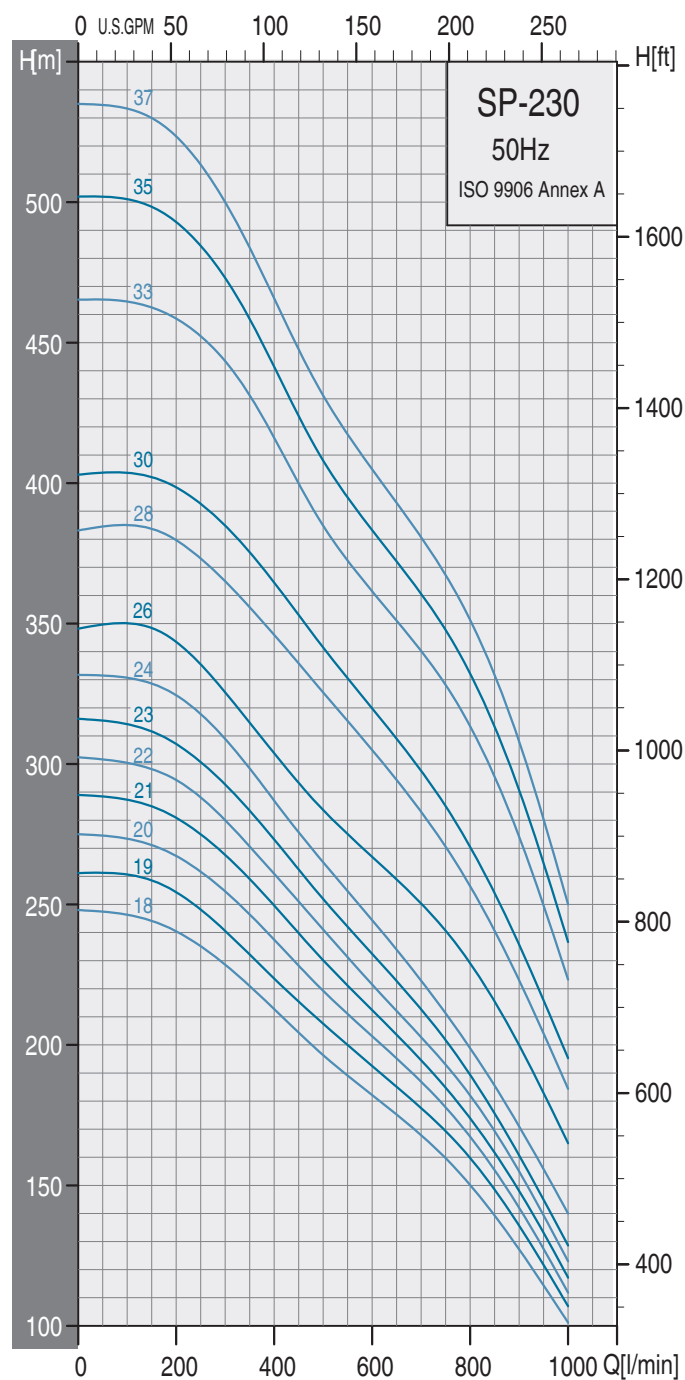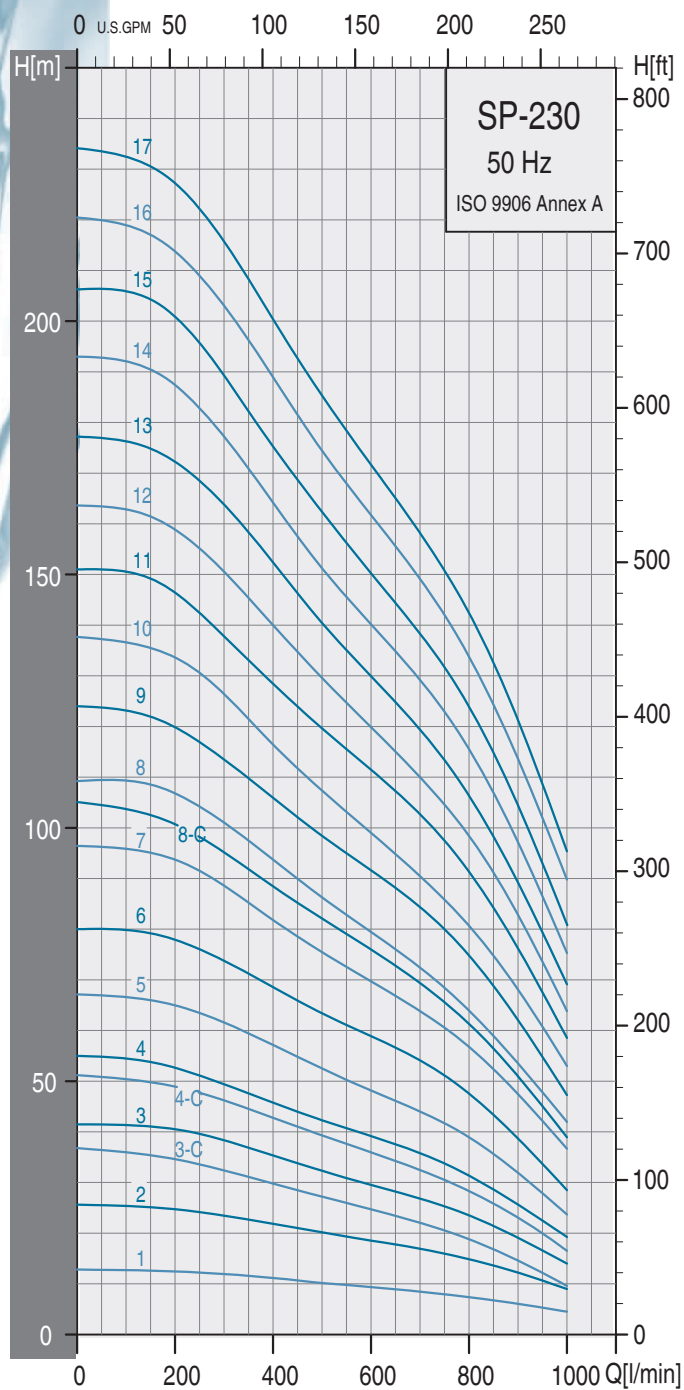

Selection Chart

50Hz

Pump Type	Motor		m³/h l/min	Q capacity 2850 rpm											
	P2			12	15	18	21	24	27	30	36	42	48	54	60
	KW	HP		200	250	300	350	400	450	500	600	700	800	900	1000
SP 230-1	2.2	3	HEAD IN METERS	13	13	12	12	11	11	10	9	9	8	6	5
SP 230-2	3	4		24	24	23	23	22	21	20	18	17	15	12	9
SP 230-3C	3.7	5		35	34	32	31	29	28	27	24	22	19	14	10
SP 230-3	5.5	7.5		40	39	38	37	35	34	33	29	27	23	18	24
SP 230-4C	5.5	7.5		49	47	46	45	43	41	39	36	32	28	23	17
SP 230-4	7.5	10		53	51	49	48	46	44	42	39	36	31	26	19
SP 230-5	7.5	10		65	63	61	59	57	55	53	48	44	39	32	24
SP 230-6	9.3	12.5		78	76	74	71	69	66	63	59	54	48	39	29
SP 230-7	11	15		94	92	88	85	82	79	76	70	64	57	47	37
SP 230-8C	11	15		100	98	95	92	88	85	82	76	69	61	51	39
SP 230-8	13	17.5		107	104	101	97	94	90	86	79	73	64	54	42
SP 230-9	15	20		120	117	114	110	106	102	98	92	85	75	62	47
SP 230-10	15	20		133	130	127	122	117	112	107	98	90	80	67	53
SP 230-11	18.5	25		146	142	138	133	128	124	120	112	103	91	76	59
SP 230-12	18.5	25		158	155	150	145	140	135	130	120	110	98	83	64
SP 230-13	22	30		172	169	164	158	152	146	140	130	120	106	89	69
SP 230-14	22	30		187	183	177	171	164	158	151	140	129	115	97	75
SP 230-15	22	30		200	195	189	183	176	169	163	150	138	124	103	81
SP 230-16	26	35		214	209	203	196	189	182	174	162	149	134	113	90
SP 230-17	26	35		227	222	215	208	200	193	186	172	158	143	121	96
SP 230-18	30	40		240	235	229	221	213	204	196	182	168	150	127	101
SP 230-19	30	40		254	248	241	233	224	216	208	193	178	160	136	107
SP 230-20	30	40		267	262	255	246	238	228	219	203	187	167	142	112
SP 230-21	37	50		280	275	268	259	250	240	230	212	195	174	148	117
SP 230-22	37	50		294	288	280	270	260	251	241	222	203	183	155	123
SP 230-23	37	50		307	301	293	283	273	262	252	232	213	189	161	129
SP 230-24	37	50		325	317	309	298	287	276	265	244	223	199	171	140
► SP 230-26	45	60		343	335	324	313	302	292	283	267	251	230	200	165
► SP 230-28	45	60		380	373	365	356	346	336	326	305	283	257	223	184
► SP 230-30	45	60		398	393	385	375	365	353	342	320	298	271	236	195
► SP 230-33	55	75		459	452	443	431	416	400	385	362	340	313	274	223
► SP 230-35	55	75		493	485	473	459	441	424	408	383	361	332	291	237
► SP 230-37	63	85		523	513	500	484	466	448	431	405	381	351	308	250

*Higher pressure , longer stages pumps up to 37 stages are available on request.

► With Sleeve .

Dimensions and weights


Pump Type	Motor Dia.	Dimensions (mm)			Net Weight (Kg)
		A	C*	C**	
SP 230-1	4"	383	146		6.9
SP 230-2	4"	496	146		9.2
SP 230-3C	4"	609	146		11.5
SP 230-3	4"	609	146		11.5
SP 230-4C	4"	722	146		13.8
SP 230-4	6"	722	149	152	13.8
SP 230-5	6"	835	149	152	16
SP 230-6	6"	948	149	152	18.3
SP 230-7	6"	1061	149	152	20.6
SP 230-8C	6"	1174	149	152	22.9
SP 230-8	6"	1174	149	152	22.9
SP 230-9	6"	1287	149	152	25.2
SP 230-10	6"	1400	149	152	27.4
SP 230-11	6"	1513	149	152	29.7
SP 230-12	6"	1626	149	152	32
SP 230-13	6"	1739	149	152	34.3
SP 230-14	6"	1852	149	152	36.6
SP 230-15	6"	1965	149	152	38.8
SP 230-16	6"	2078	149	152	41.1
SP 230-17	6"	2191	149	152	43.4
SP 230-18	6"	2304	149	152	45.7
SP 230-19	6"	2417	149	152	47.9
SP 230-20	6"	2530	149	152	50.2
SP 230-21	6"	2643	149	152	52.5
SP 230-22	6"	2756	149	152	54.8
SP 230-23	6"	2869	149	152	57.1
SP 230-24	6"	2982	149	152	59.3
SP 230-26	8"	2537	192	192	130.4
SP 230-28	8"	3763	192	192	137.9
SP 230-30	8"	3989	192	192	146
SP 230-33	8"	4328	192	192	158.4
SP 230-35	8"	4554	192	192	166.2
SP 230-37	8"	4780	192	192	174

C*: Maximum diameter of pump with one motor cable

C**: Maximum diameter of pump with two motor cable

SP-23026 to SP-23037 are mounted in sleeve for R 4 connection

► With Sleeve .




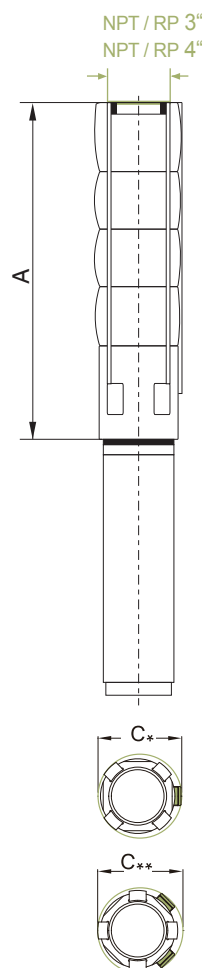


Stairs SP Series

SP 6"

SP300

Performance Curves

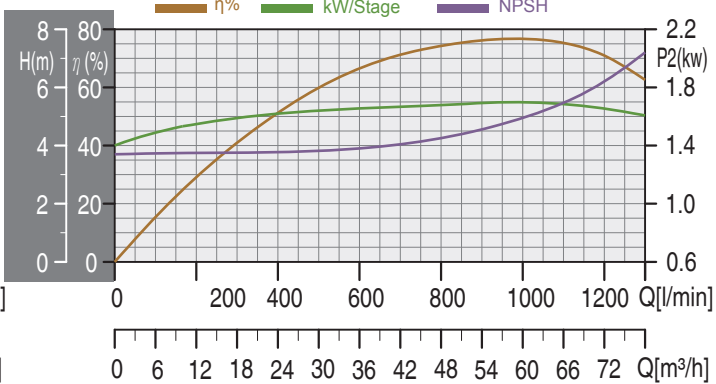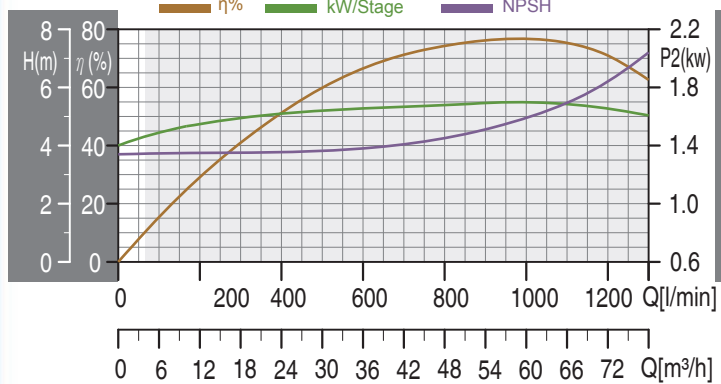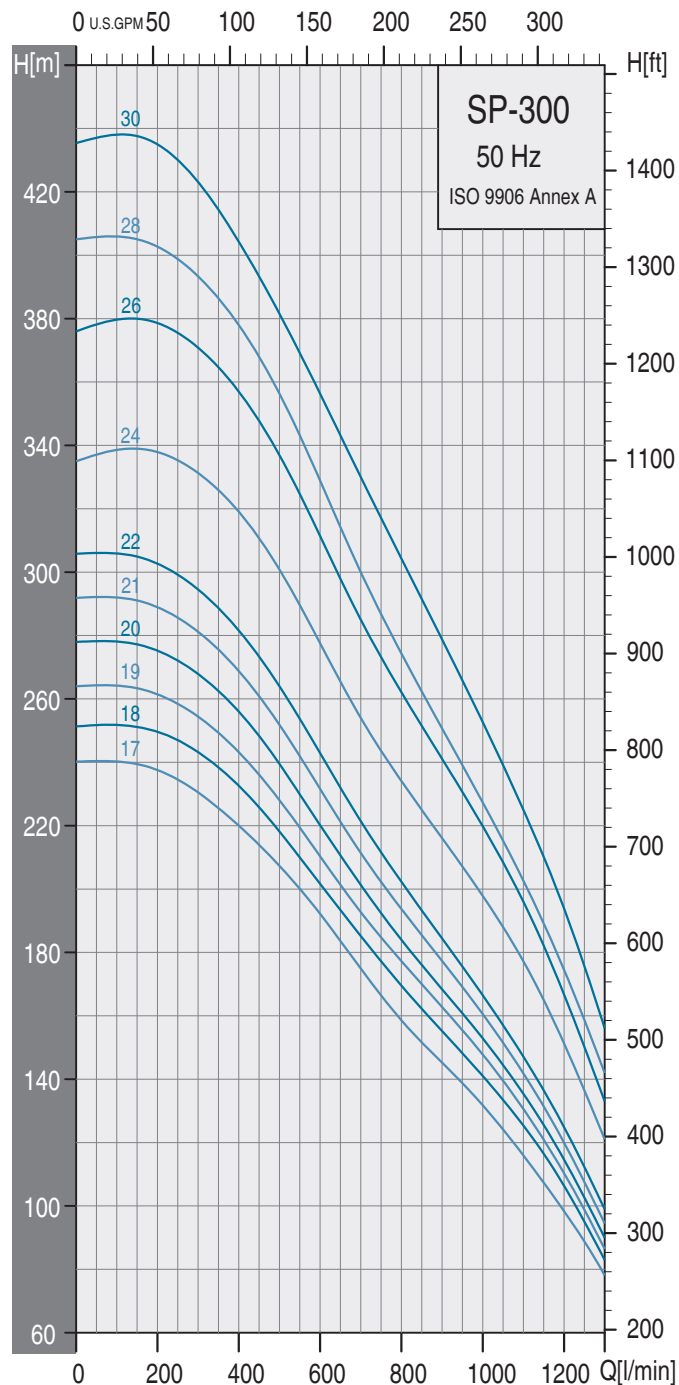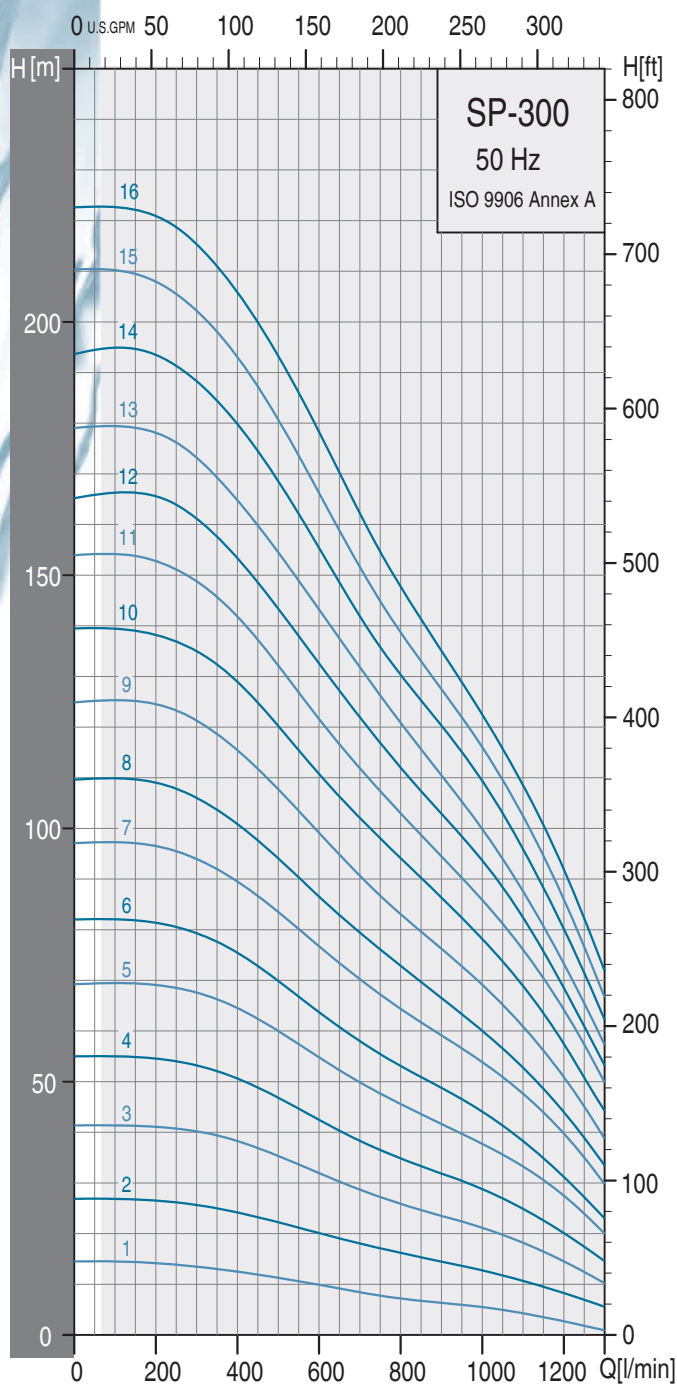

Selection Chart

50Hz

Pump Type	Motor		Q capacity 2850 rpm													
	P2		m³/h l/min	18	21	24	27	30	36	42	48	54	60	66	72	78
	KW	HP		300	350	400	450	500	600	700	800	900	1000	1100	1200	1300
SP 300-1	2.2	3	HEAD IN METERS	13	13	12	12	11	10	8	7	6	5	4	2	1
SP 300-2	3.7	5		26	25	24	23	22	20	18	16	14	13	11	8	5
SP 300-3	5.5	7.5		40	39	38	37	36	32	28	26	24	21	18	14	10
SP 300-4	7.5	10		53	52	51	48	47	43	38	35	32	28	25	20	14
SP 300-5	9.3	12.5		67	66	64	52	60	55	50	46	42	38	33	27	19
SP 300-6	11	15		79	78	76	73	70	64	58	53	48	44	38	32	23
SP 300-7	13	17.5		94	92	89	86	84	77	70	64	59	54	47	40	29
SP 300-8	15	20		106	104	101	97	94	87	80	73	67	60	53	44	33
SP 300-9	18.5	25		122	118	116	112	108	99	91	83	76	69	61	51	38
SP 300-10	18.5	25		135	132	128	125	120	111	102	95	87	78	68	57	45
SP 300-11	22	30		148	146	142	137	132	122	112	103	95	86	76	64	49
SP 300-12	22	30		162	157	153	148	143	133	122	112	103	94	83	68	53
SP 300-13	26	35		173	169	165	160	155	143	132	121	110	100	87	73	57
SP 300-14	26	35		188	184	180	175	168	156	142	130	120	109	96	80	63
SP 300-15	26	35		203	197	193	187	180	166	152	138	127	116	103	86	67
SP 300-16	30	40		216	211	206	200	193	178	162	148	135	123	108	92	72
SP 300-17	37	50		230	226	220	214	207	192	175	158	145	132	116	97	78
SP 300-18	37	50		243	238	233	226	218	202	185	170	155	141	126	107	83
SP 300-19	37	50		254	249	243	236	228	210	193	177	163	148	131	110	86
SP 300-20	37	50		267	263	256	248	239	220	201	184	168	153	136	115	90
SP 300-21	37	50		281	276	269	261	252	232	211	194	177	161	142	120	95
SP 300-22	37	50		295	289	282	273	264	243	221	202	184	167	147	125	99
SP 300-24	45	60		331	326	319	311	301	278	254	234	216	198	177	151	121
SP 300-26	55	75		371	365	357	348	337	312	285	262	241	220	196	167	133
SP 300-28	55	75		393	386	378	368	357	329	300	274	251	227	203	175	142
SP 300-30	55	75		423	415	404	393	381	356	330	304	279	253	225	194	156

*Higher pressure , longer stages pumps up to 30 stages are available on request.

► With Sleeve .

Dimensions and weights


Pump Type	Motor Dia.	Dimensions (mm)			Net Weight (Kg)
		A	C*	C**	
SP 300-1	6"	383	146		6.9
SP 300-2	6"	496	146		9.2
SP 300-3	6"	609	146		11.5
SP 300-4	6"	722	149	152	13.7
SP 300-5	6"	835	149	152	16.0
SP 300-6	6"	948	149	152	18.3
SP 300-7	6"	1061	149	152	20.6
SP 300-8	6"	1174	149	152	22.9
SP 300-9	6"	1287	149	152	25.1
SP 300-10	6"	1400	149	152	27.4
SP 300-11	6"	1513	149	152	29.7
SP 300-12	6"	1626	149	152	32.0
SP 300-13	6"	1739	149	152	34.3
SP 300-14	6"	1852	149	152	36.5
SP 300-15	6"	1965	149	152	38.8
SP 300-16	6"	2078	149	152	41.1
SP 300-17	6"	2191	149	152	43.4
SP 300-18	6"	2304	149	152	45.7
SP 300-19	6"	2417	149	152	48.0
SP 300-20	6"	2530	149	152	50.2
SP 300-21	6"	2643	149	152	52.5
SP 300-22	8"	2784	183	183	60.2
SP 300-24	8"	3311	192	192	125.1
SP 300-26	8"	3537	192	192	132.4
SP 300-28	8"	3763	192	192	139.9
SP 300-30	8"	3989	192	192	148.0

C*: Maximum diameter of pump with one motor cable

C**: Maximum diameter of pump with two motor cable

SP-30024 and SP-30030 are mounted in sleeve for R 4 connection

► With Sleeve .

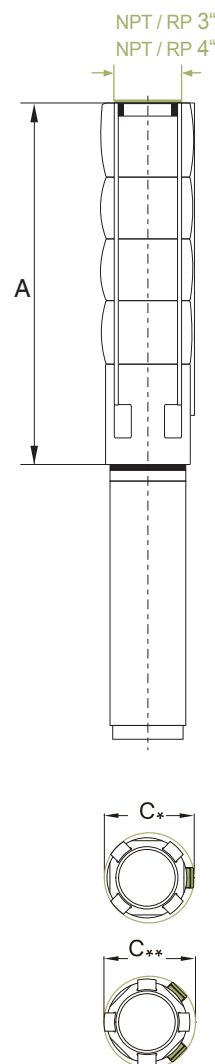



STAIRS INDUSTRIAL CO., LTD.

Company

No. 3-8, Sanchial Tsun, Lutsao Hsiang,

Chiai Hsien, Taiwan, R.O.C.

Tel: +886(0)53750488

Fax: +886(0)53752330

E-Mail: stairs@stairs.com.tw