

**General Data**

Model:	AM 40/2/110 C.219/G
Code:	2000087
Series:	AM-AT
Weight [Kg]	21.00
Submersible eletropumps for wastewater including sewage	

**Hydraulic**

Impeller Type:	Twin channel impeller
Delivery DN [mm]:	G 1"1/2
Input DN [mm]:	-
Free Passage [mm]:	15
Impeller Ø [mm]:	105
Max Pump Efficiency [%]:	37.60
Global Efficiency [%]:	32.98
Head [m]:	8.92
Flow [m³/h]:	10.80

*Tolerance according to ISO 9906:2012 3B2*



Attention: pictures for illustrative purposes

**Features**

Upper Meccanical seal:	Lips seal
Lower Meccanical Seal:	Silicon Carbide/Ceramic/Viton
Upper Bearing:	Single raw ball bearing
Lower Bearing:	Single raw ball bearing
IP Protection:	IP68
Motor protection:	not present
Humidity sensor:	not present
ATEX:	not present
Applied Paint:	Two component water-based paint
Cable Length [m]:	10
Lubricating Oil:	Q8 WF15
Oil Quantity [Kg]:	0.15

**Materials**



Pump:	Cast Iron EN 1561 EN-GJL-200
Impeller:	Cast iron EN 1561 EN-GJL-200
Motor shaft:	Stainless steel AISI 420
Cooling Jacket:	Not available
Screw:	Stainless steel A2-70
Cable:	H07RN8F

**Pumped Liquid**

Pumped Liquid:	Light and lightly sewage
Density [Kg/dm³]:	1.1
pH:	6-10
Temperature Range:	0-40°C


**Installation**

Maximum depth of immersion [m]:	20
Cooling Type:	The cooling of the motor is ensured by the surrounding liquid
Installation:	Vertical
Floating on board machine:	present

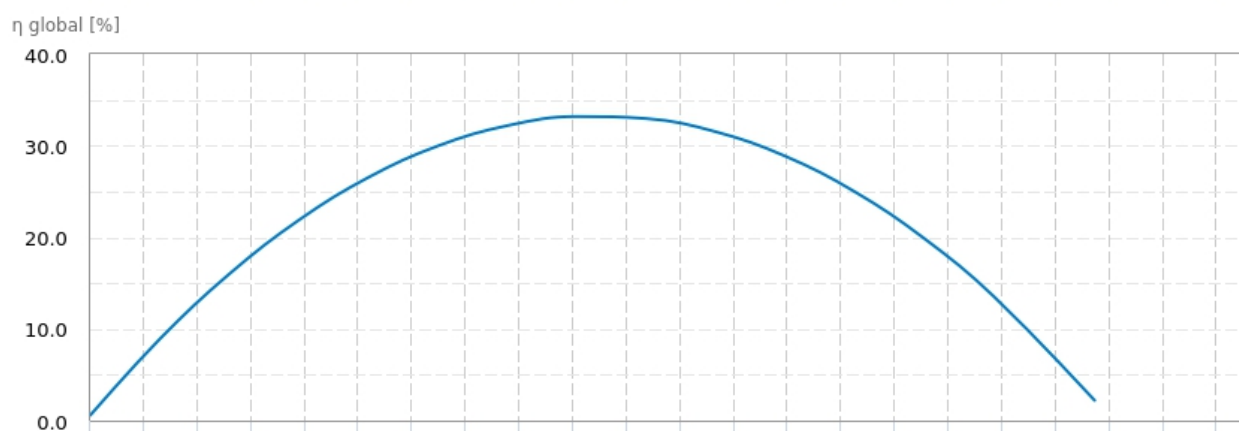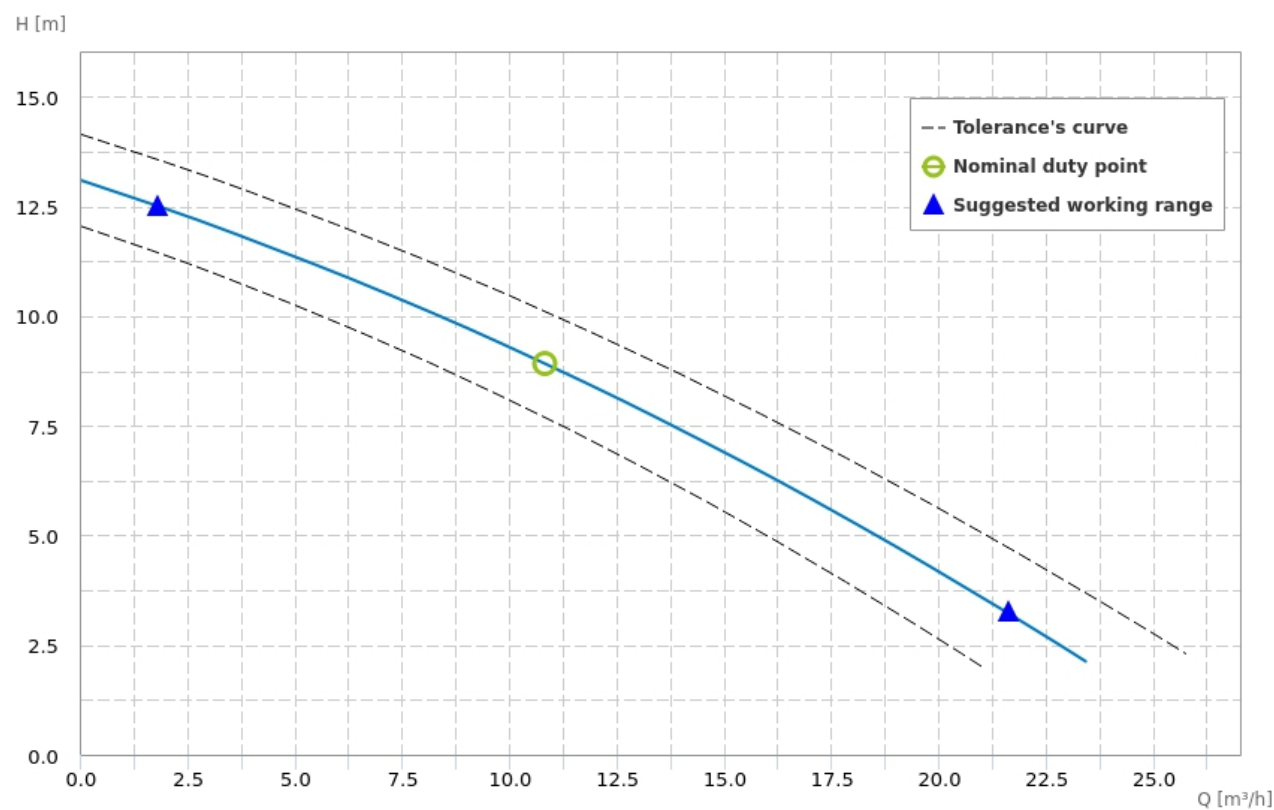

**Motor**

Motor code:	3520140210
Power P1 [kW]:	0.94
Power P2 [kW]:	0.75
Phases:	1
Frequency [Hz]:	50
Tension [V]:	230
Nominal current [A]:	4.3
Starting current [%]:	356.0
Power Factor:	0.95
R.P.M.:	2850
Starting:	D.O.L
Capacitor [ $\mu$ F]:	20.0
Insulation Class:	F 155°C
Service type:	S2
Max Efficiency [%]:	88.10
Max Efficiency at full load [%]:	86.5
Efficiency at $\frac{3}{4}$ load [%]:	87.5
Efficiency at $\frac{1}{2}$ load [%]:	87.5
Efficiency class:	-

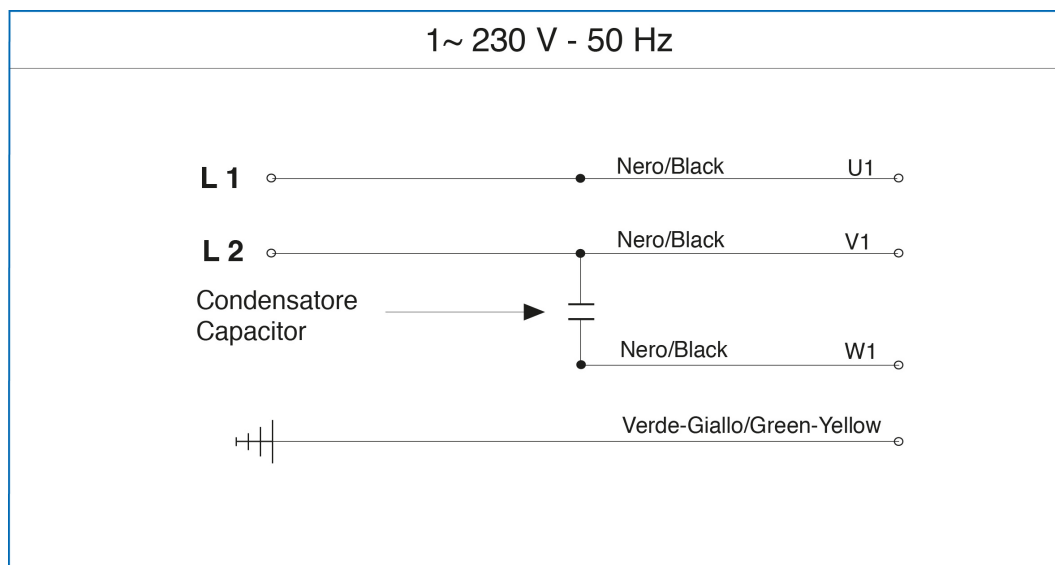**Wiring diagrams**

## Dimensions drawing

