

General Data

Model:	AM 50/2/110 C.225
Code:	2000092
Series:	AM-AT
Weight [Kg]	25.00
Submersible eletropumps for wastewater including sewage	

Hydraulic

Impeller Type:	Twin channel impeller
Delivery DN [mm]:	G 2"
Input DN [mm]:	-
Free Passage [mm]:	15
Impeller Ø [mm]:	115
Max Pump Efficiency [%]:	40.60
Global Efficiency [%]:	30.96
Head [m]:	9.94
Flow [m³/h]:	14.40

Tolerance according to ISO 9906:2012 3B2



Attention: pictures for illustrative purposes

Features

Upper Meccanical seal:	Lips seal
Lower Meccanical Seal:	Silicon carbide/Ceramic/Viton
Upper Bearing:	Single raw ball bearing
Lower Bearing:	Single raw ball bearing
IP Protection:	IP68
Motor protection:	not present
Humidity sensor:	not present
ATEX:	not present
Applied Paint:	Two component water-based paint
Cable Length [m]:	10
Lubricating Oil:	Q8 WF15
Oil Quantity [Kg]:	0.27

Materials




Pump:	Cast Iron EN 1561 EN-GJL-200
Impeller:	Cast iron EN 1561 EN-GJL-200
Motor shaft:	Stainless steel AISI 420
Cooling Jacket:	Not available
Screw:	Stainless steel A2-70
Cable:	H07RN8F

Pumped Liquid

Pumped Liquid:	Light and lightly sewage
Density [Kg/dm³]:	1.1
pH:	6-10
Temperature Range:	0-40°C


Installation

Maximum depth of immersion [m]:	20
Cooling Type:	The cooling of the motor is ensured by the surrounding liquid
Installation:	Vertical
Floating on board machine:	not present

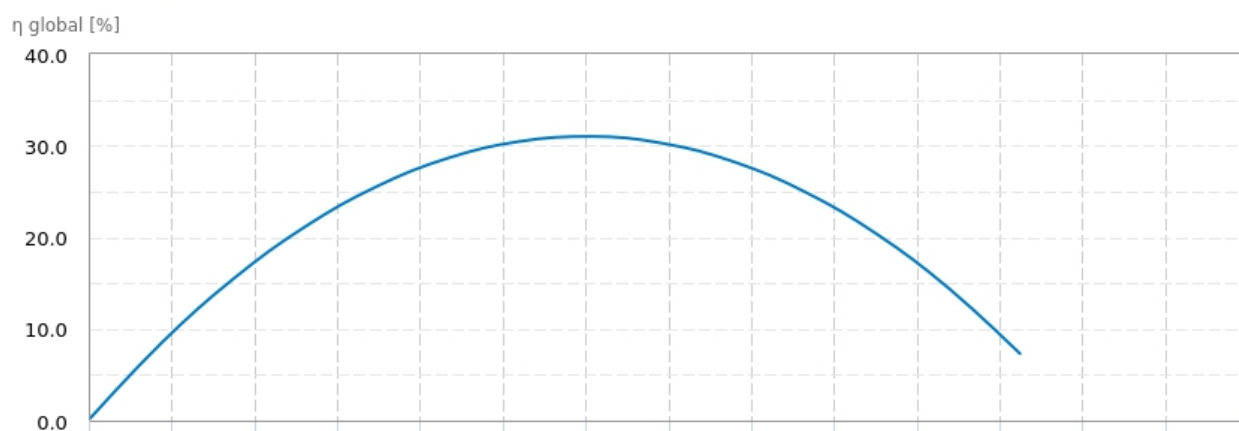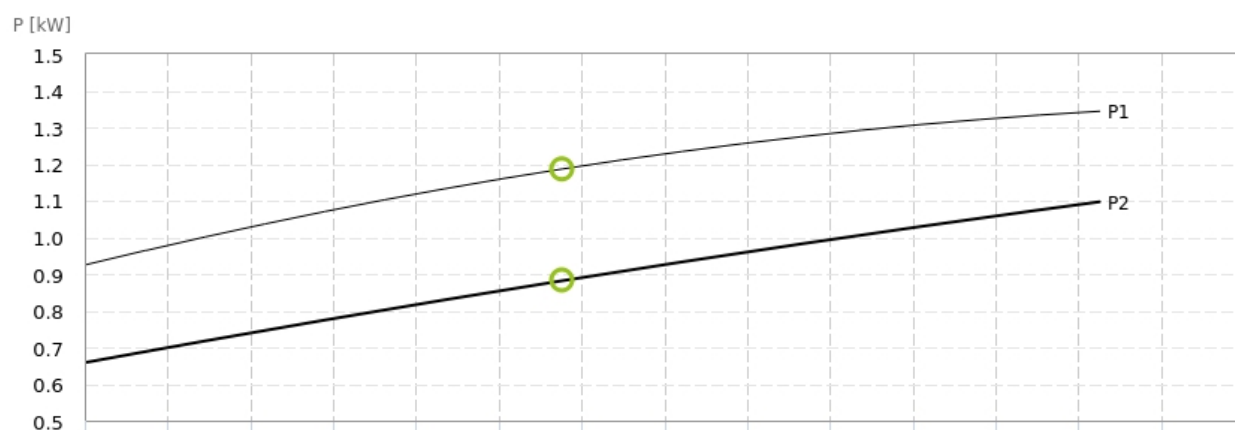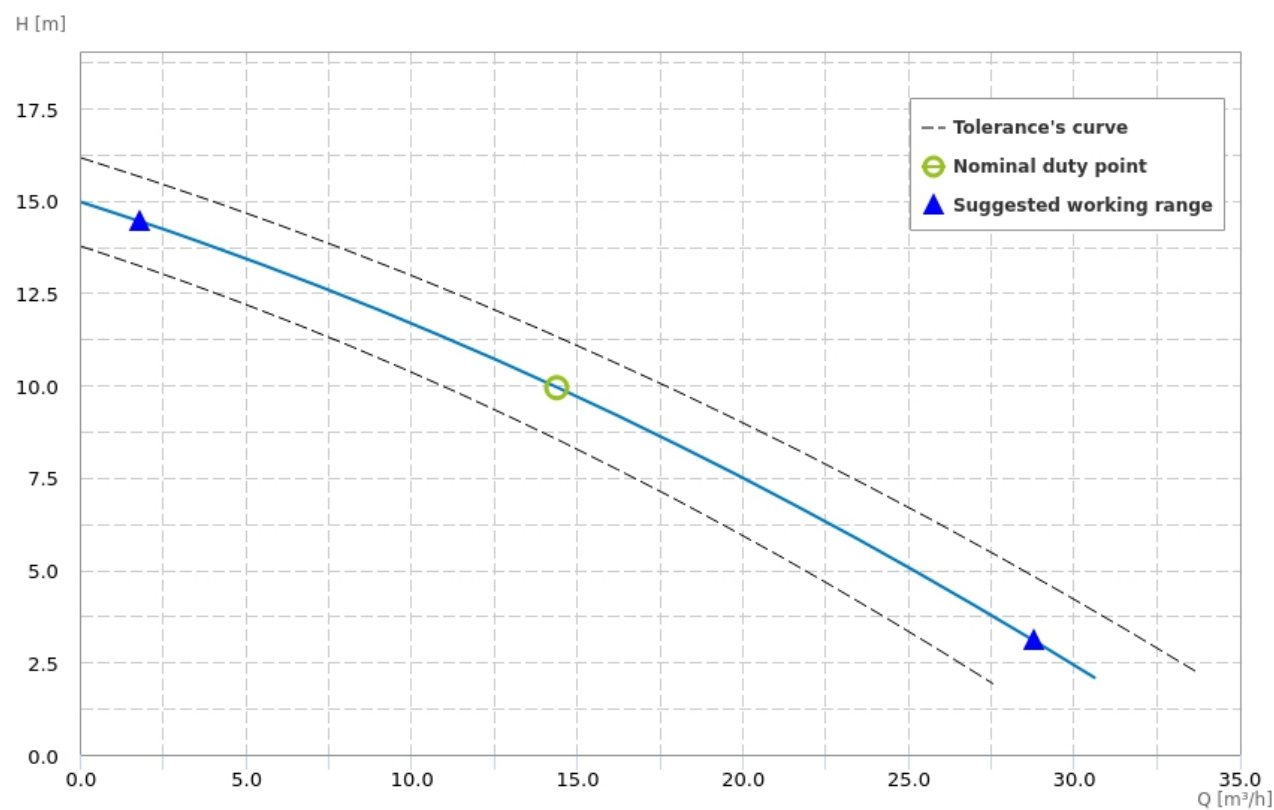

Motor

Motor code:	3520180245
Power P1 [kW]:	1.34
Power P2 [kW]:	1.10
Phases:	1
Frequency [Hz]:	50
Tension [V]:	230
Nominal current [A]:	6.2
Starting current [%]:	232.0
Power Factor:	0.94
R.P.M.:	2850
Starting:	D.O.L
Capacitor [μ F]:	25.0
Insulation Class:	F 155°C
Service type:	S2
Max Efficiency [%]:	77.20
Max Efficiency at full load [%]:	76.2
Efficiency at $\frac{3}{4}$ load [%]:	75.7
Efficiency at $\frac{1}{2}$ load [%]:	75.3
Efficiency class:	-

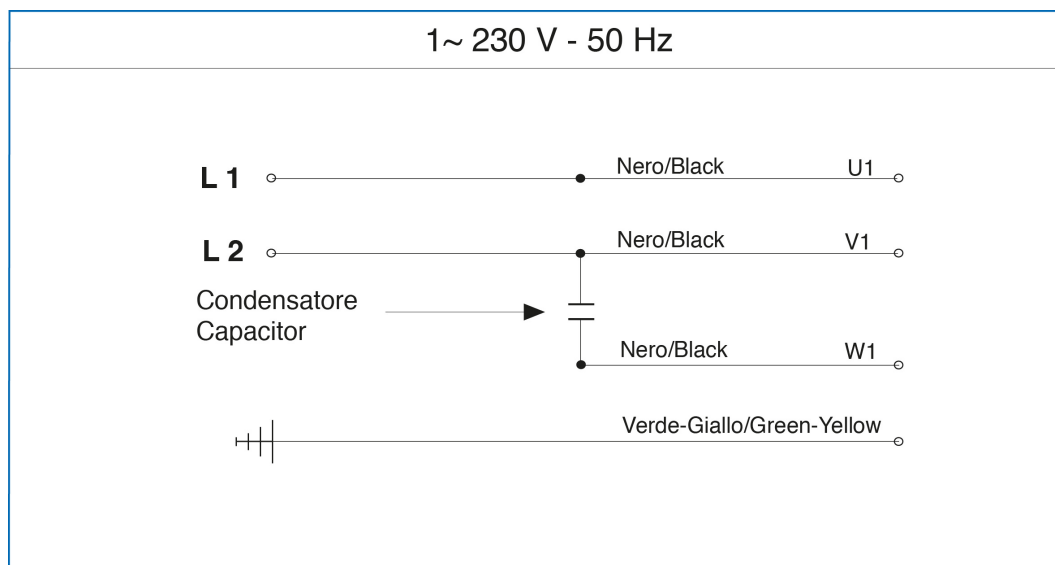Wiring diagrams

Dimensions drawing

