

**General Data**

Model:	AM 50/2/110 C.226
Code:	2000096
Series:	AM-AT
Weight [Kg]	26.00
Submersible eletropumps for wastewater including sewage	

**Hydraulic**

Impeller Type:	Twin channel impeller
Delivery DN [mm]:	G 2"
Input DN [mm]:	-
Free Passage [mm]:	15
Impeller Ø [mm]:	115
Max Pump Efficiency [%]:	40.70
Global Efficiency [%]:	31.96
Head [m]:	11.64
Flow [m³/h]:	18.00

*Tolerance according to ISO 9906:2012 3B2*



Attention: pictures for illustrative purposes

**Features**

Upper Meccanical seal:	Lips seal
Lower Meccanical Seal:	Silicon carbide/Ceramic/Viton
Upper Bearing:	Single raw ball bearing
Lower Bearing:	Single raw ball bearing
IP Protection:	IP68
Motor protection:	not present
Humidity sensor:	not present
ATEX:	not present
Applied Paint:	Two component water-based paint
Cable Length [m]:	10
Lubricating Oil:	Q8 WF15
Oil Quantity [Kg]:	0.27

**Materials**




Pump:	Cast Iron EN 1561 EN-GJL-200
Impeller:	Cast iron EN 1561 EN-GJL-200
Motor shaft:	Stainless steel AISI 420
Cooling Jacket:	Not available
Screw:	Stainless steel A2-70
Cable:	H07RN8F

**Pumped Liquid**

Pumped Liquid:	Light and lightly sewage
Density [Kg/dm³]:	1.1
pH:	6-10
Temperature Range:	0-40°C


**Installation**

Maximum depth of immersion [m]:	20
Cooling Type:	The cooling of the motor is ensured by the surrounding liquid
Installation:	Vertical
Floating on board machine:	not present

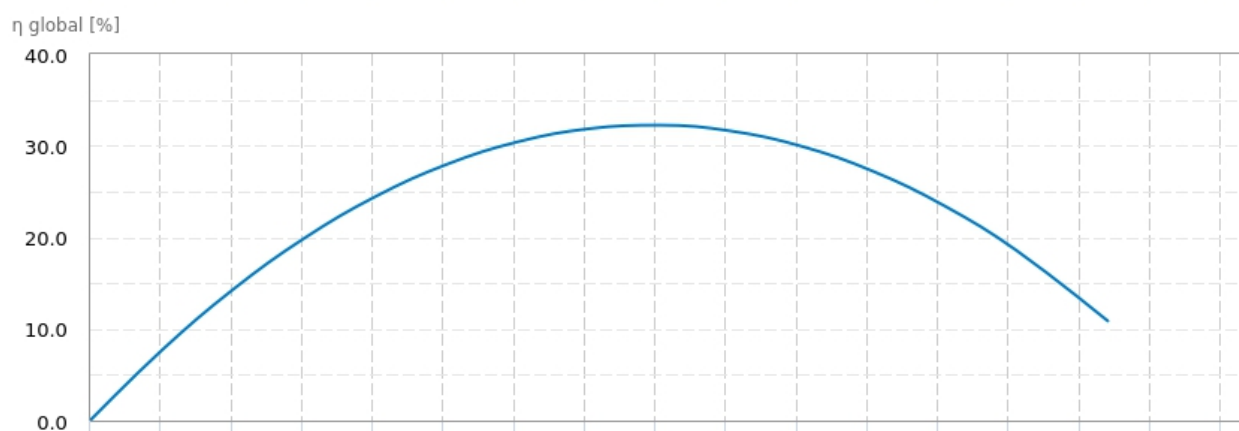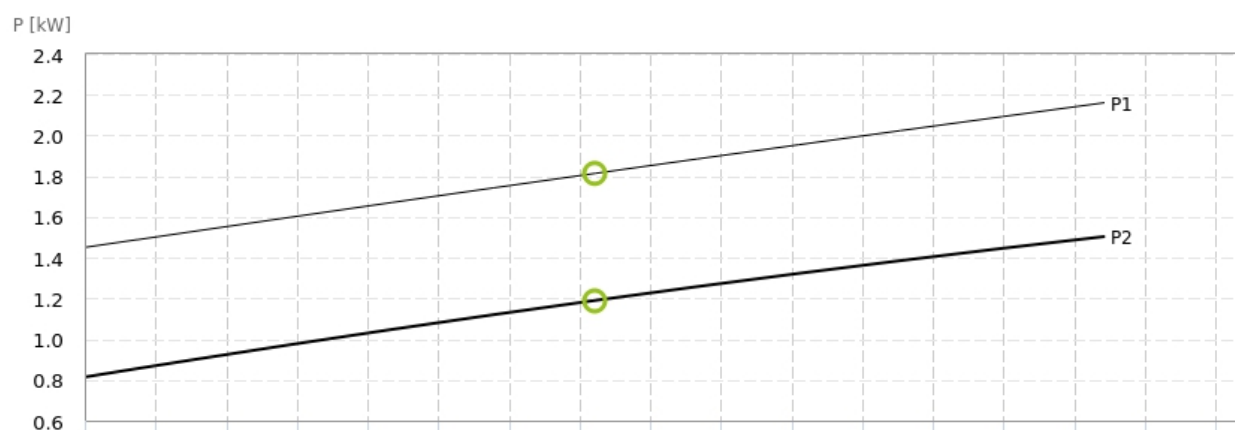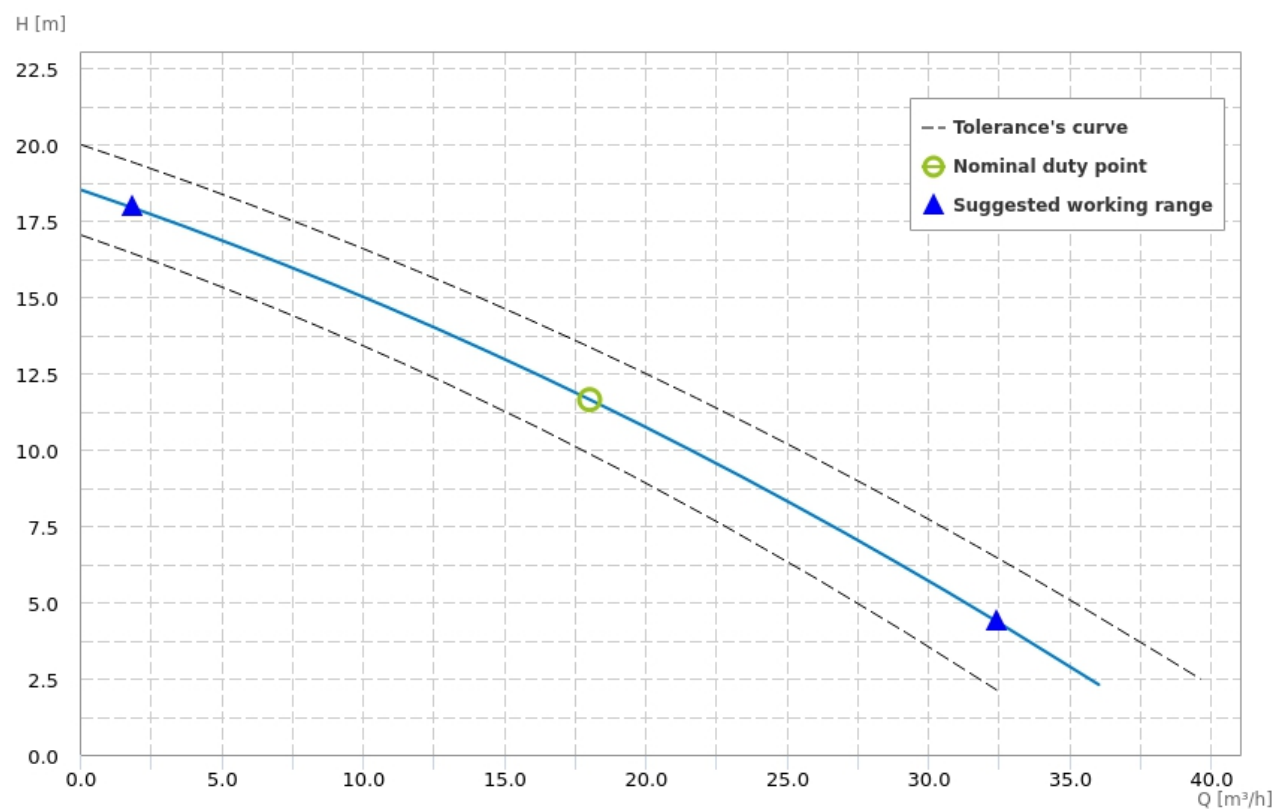

**Motor**

Motor code:	3520180245
Power P1 [kW]:	2.10
Power P2 [kW]:	1.50
Phases:	1
Frequency [Hz]:	50
Tension [V]:	230
Nominal current [A]:	9.6
Starting current [%]:	232.0
Power Factor:	0.97
R.P.M.:	2850
Starting:	D.O.L
Capacitor [ $\mu$ F]:	40.0
Insulation Class:	F 155°C
Service type:	S2
Max Efficiency [%]:	77.20
Max Efficiency at full load [%]:	77.2
Efficiency at $\frac{3}{4}$ load [%]:	77.0
Efficiency at $\frac{1}{2}$ load [%]:	76.0
Efficiency class:	-

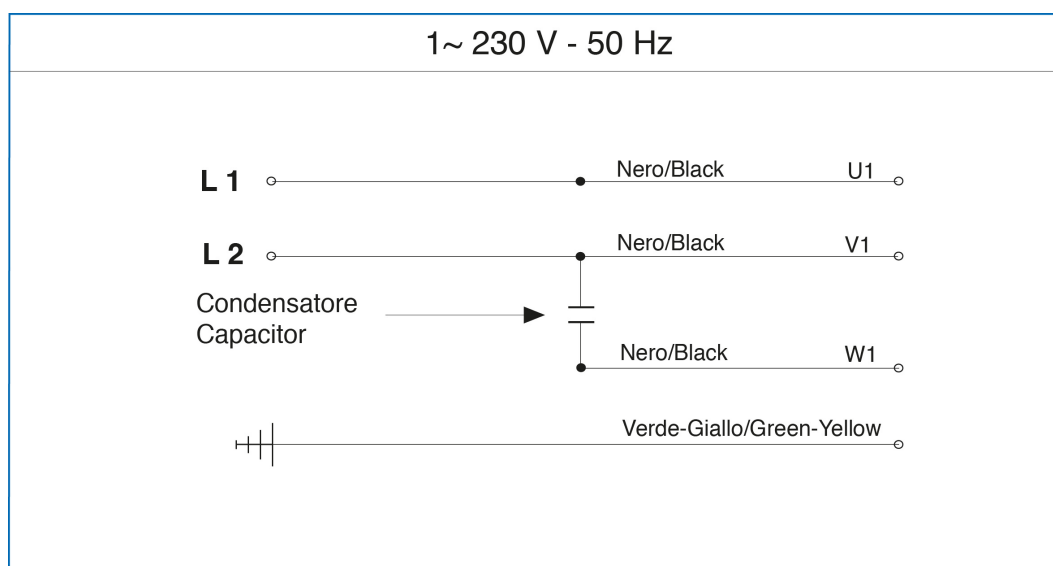**Wiring diagrams**

## Dimensions drawing

